

OT 100/ 220-240/1A4 2DIM P7 (NEW)

OPTOTRONIC - 2DIM NFC IP67 | 2DIM, NFC – constant current LED drivers



Product family features

- 2DIM functionality (AstroDIM, 1...10 V)
- Wide output current range
- Adjustable and Constant Lumen Output (CLO)
- Short-circuit, overload and overtemperature protection
- High IP protection (IP67)
- 1...10 V dimming (minimum 10%)

Product family benefits

- Easily programmable by NFC (AstroDIM / Constant lumen)
- High surge protection: up to 10 kV
- High efficiency
- Lifetime: up to 100,000 h

Areas of application

- Street and urban lighting
- Industry lighting
- Suitable for luminaires of protection class I

Technical data

Electrical data


| | |
|--|------------------------|
| Max. ECG no. on circuit breaker 10 A (B) | 8 |
| Max. ECG no. on circuit breaker 16 A (B) | 13 |
| Maximum output power | 100 W |
| Minimum output current | 400 mA |
| Nominal output current | 700...1400 mA |
| Nominal output power | 50...100 W |
| Nominal output voltage | 72...144 V |
| Nominal input voltage | 220...240 V |
| Input voltage AC | 198...264 V |
| Device power loss | 11 W |
| Efficiency in full-load | 91 % ¹⁾ |
| Inrush current | 62 A ²⁾ |
| Power factor λ | ≥ 0.95 |
| Mains frequency | 50...60 Hz |
| Surge capability (L-N) | 6 kV |
| Surge capability (L/N-Ground) | 10 kV |
| U-OUT (working voltage) | 200 V |
| Current set | NFC |
| Output current tolerance | ± 5 % |
| Output ripple current (100 Hz) | $< \pm 5$ % |
| Total harmonic distortion | < 10 % ³⁾ |
| Default output current | 700 mA |

1) at 230 V, 50 Hz


2) Max, $t_h = 155 \mu s$

3) At full load

Typical Power Factor v Load

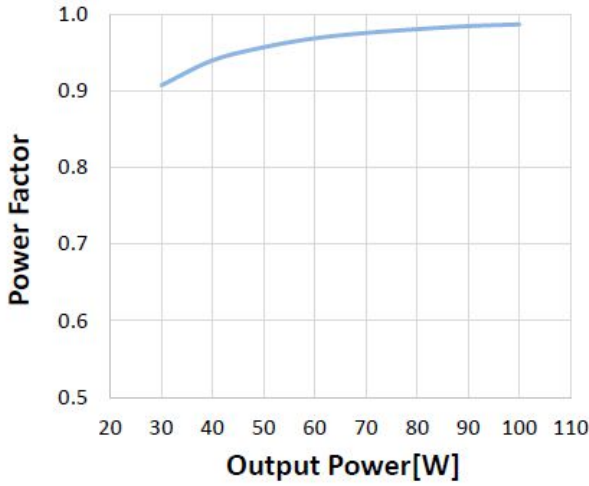


Operating Window

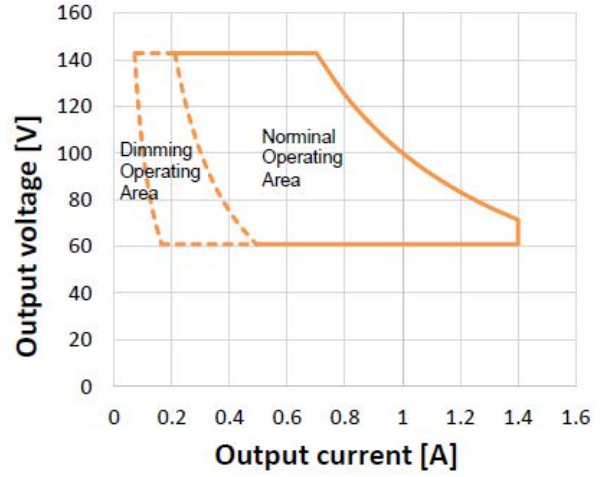


OT 100 2DIM NFC IP67 Typical Power Factor vs. Load

OT 100 2DIM NFC IP67 Typical Operation Window

Typical THD v Load

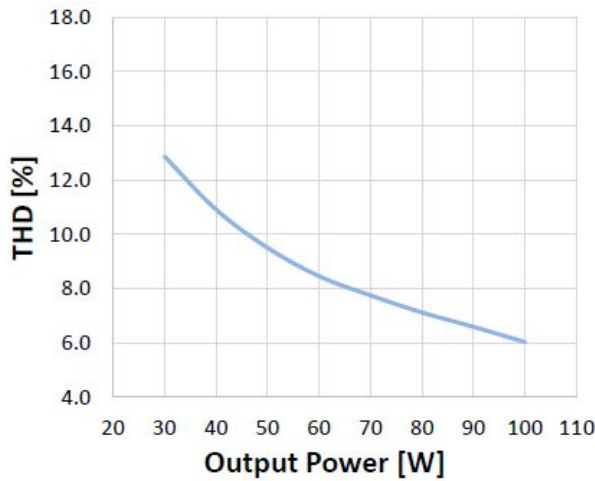


Typical Efficiency v Load 230 V 50 Hz

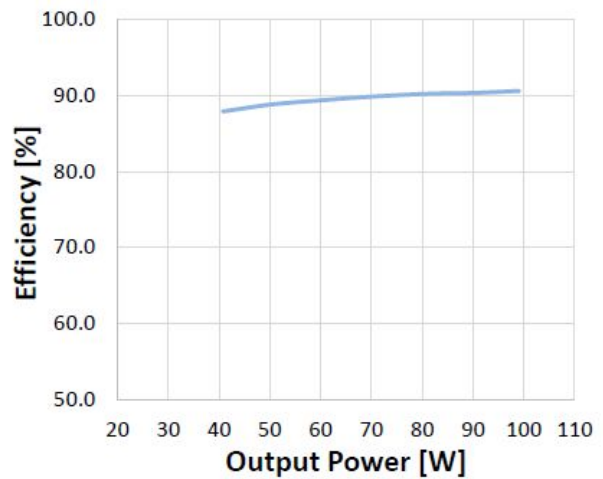

OT 100 2DIM NFC IP67 Typical THD vs Load

OT 100 2DIM NFC IP67 Typical Efficiency vs. Load (230V / 50 Hz)

Dimensions & weight

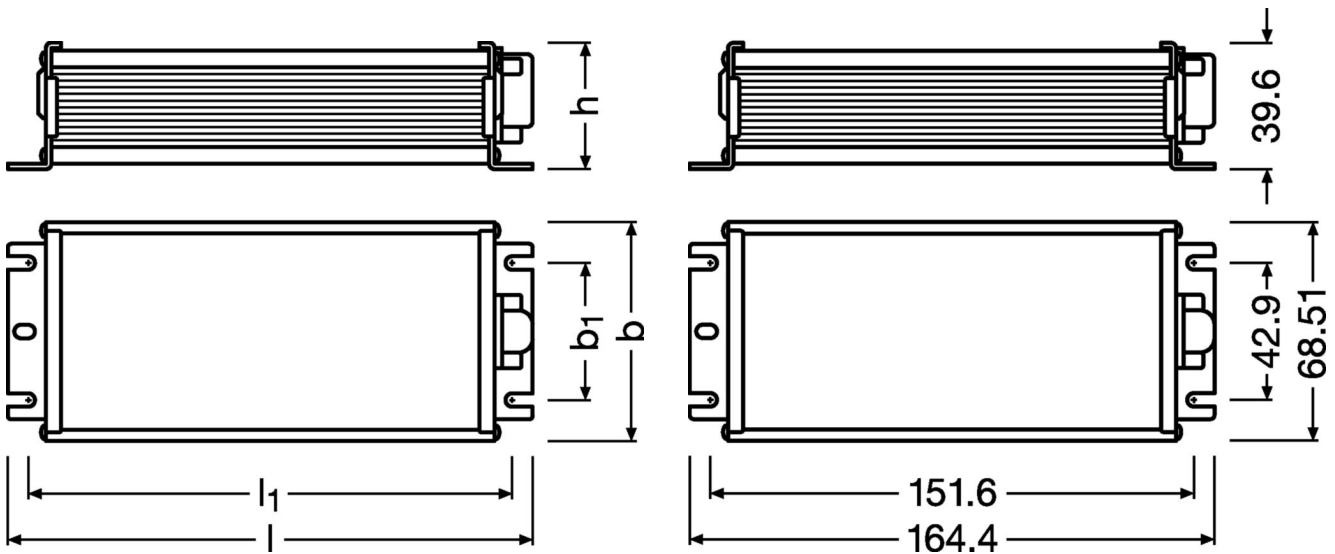

| | |
|--------------------------------------|---------------------|
| Product weight | 720.00 g |
| Length | 164.4 mm |
| Height | 39.6 mm |
| Width | 68.5 mm |
| Cable cross-section, input side | 1.0 mm ² |
| Cable cross-section, output side | 1.0 mm ² |
| Cable/wire length, input side | 590±20 mm |
| Cable/wire length, output side | 300±20 mm |
| Mounting hole spacing, length | 151.6 mm |
| Mounting hole spacing, width | 42.9 mm |
| Wire preparation length, input side | 10 mm |
| Wire preparation length, output side | 10 mm |

Colors & materials

| | |
|-----------------|-----------|
| Casing material | Aluminium |
| Product color | Silver |

Temperatures & operating conditions

| | |
|--|------------------------|
| Ambient temperature range | -40...+55 °C |
| Max.housing temperature in case of fault | 120 °C |
| Maximum temperature at tc test point | 85 °C |
| Permitted rel. humidity during operation | 5...95 % ¹⁾ |
| Temperature range at storage | -40...+85 °C |

1) Non condensing, absolute humidity: 36g/m³

Lifespan

| | |
|---------------------|----------------------------------|
| ECG lifetime | 50000 h / 100000 h ¹⁾ |
|---------------------|----------------------------------|

1) At maximum $T_c = 85^\circ\text{C}$ / 10% failure rate / At maximum $T_c = 75^\circ\text{C}$ / 10% failure rate

Capabilities

| | |
|---|--|
| Max. cable length to lamp/LED module | 2.0 m ¹⁾ |
| Number of channels | 1 |
| Dimmable | Yes |
| Dimming interface | AstroDIM / 1...10 V / Pulse Width Modulation |
| Dimming range | 10...100 % |
| Overload protection | Automatic reversible |
| Overheating protection | Automatic reversible |
| Short-circuit protection | Automatic reversible |
| Suitable for fixtures with prot. class | I |
| Type of connection, input side | Wires |
| Type of connection, output side | Wires |
| Constant lumen function | Yes |
| No-load proof | Automatic reversible |
| Programming interface | NFC |

1) Output wires must be routed as close as possible to each other

Certificates & standards

| | |
|---------------------------|--|
| Type of protection | IP67 |
| Standards | Acc. to EN 61347-1 / Acc. to EN 61347-2-13 / Acc. to EN 55015 / Acc. to EN 61547 / Acc. to EN 61000-3-2 / Acc. to EN 61000-3-3 / Acc. to EN 62384 / EN 60598-1(ED.8) |
| Approval marks – approval | CE / CCC / RCM / ENEC 05 / TISI |

Logistical data

| | |
|----------------|-------------|
| Commodity code | 85044083900 |
|----------------|-------------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
|---|---------------|
| Date of Declaration | 21-08-2024 |
| Primary Article Identifier | 4062172060677 |
| Declaration No. in SCIP database | In work |
| SCIP_STATUS | In work |
| SCIP_ID | |

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Additional product information

- Input overvoltage protection: the driver withstands an input voltage up to 350 Vac for a maximum of two hours, shut down of the output load might occur in case the supply voltage exceeds the declared input voltage range;
- Output short circuit protection: short circuit current is limited to the actual output current setting without damage to the unit. See typical operating window graph for details;
- Input voltage range: Nominal operation at 198 – 264Vac. Workable at 120 – 277Vac without safety issue (refer to [8] Typical Input Voltage vs. Load), but normal performance such as THD, EMI, lifetime etc are not guaranteed;
- Over temperature protection: the driver is protected against temporary overheating by shutting down until the overheating eliminated; Auto-reversible when temperature back to normal;
- Not suitable to be mounted in ceiling corner
- The LED control gear cannot be abutted against or covered by normally flammable materials or used in installations where building insulation or debris is, or may be, present in normal use.
- The external flexible cable or cord of this driver cannot be replaced; if the cord is damaged, the driver shall be destroyed.
- The dimmer should fulfill at least basic insulation between control voltage and dimming circuit (for Australia and New Zealand).
- The startup time to reach the set output current is less than 2s.
- The protective earth (GNYE/PE wire, housing) has to be connected to the heat sink of the LED module to improve the capability of the system to withstand a surge and EMI in critical luminaires.
- For further details please consult the 2DIMLT2 application guide.
- Output over load/voltage protection: In case the input voltage of the load exceeds the output voltage range which is auto defined by output current setting of the driver ($V_o = P_o / I_o$), it automatically reduces the output current. Auto-reversible without mains power on/off;
- No load protection: the driver automatically adjusts the output voltage to the maximum output voltage which is auto defined by output current setting if no load is connected. Auto-reversible with the correct load connected;

Download Data

| File | | |
|------------------------|------------|---------------------------------------|
| Certificates | PDF | ▶ ENEC Certificate |
| CAD data | Compressed | ▶ OT 100 P7 STEP 300323 |
| Mandatory Publications | PDF | ▶ OT 2DIM P7 WP CE 3978163 060921 |
| Mandatory Publications | PDF | ▶ OT 2DIM P7 WP UK DoC 4281299 300721 |
| User instruction | PDF | ▶ OPTOTRONIC 2DIM P7 |

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|-----------------------------|----------------------------------|--------------------------------------|-----------------------|--------------|
| 4062172060677 | OT 100/ 220-240/1A4 2DIM P7 | Shipping carton box 10 Pieces | 469 x 253 x 128 mm | 15.19 dm ³ | 801.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

Data privacy

This OSRAM driver can be configured using the Tuner4TRONIC software. This requires registering on www.myosram.com and downloading the Tuner4TRONIC software from the Internet. The Tuner4TRONIC software enables users to access and view the operational data of a luminaire or driver via the corresponding programming interfaces. A password key (Config Lock) must be set up in the driver via the Tuner4TRONIC software in order to control which users can access and view operational data. Follow the instructions for password setup. To grant an external person or company rights to access or view operational data, you can assign password keys. In this case, however, you are responsible for ensuring that the third party concerned takes notice of the information described here.

However, OSRAM can read out operating data from devices for maintenance and service purposes even when a password key has been assigned. In individual cases, OSRAM will also use its access rights in order to optimize or improve driver hardware and driver functions. In accordance with data privacy principles, any user of operating data (luminaire manufacturers, third parties with access rights) must ensure that personal data (e.g. name, address, location IDs) are only merged with the prior written consent of the person (end user) concerned. The respective user of the operating data is responsible for providing evidence of consent.

Accessories Optional

| Product description | Accessory name | Accessory code |
|-----------------------------|-----------------------------------|-----------------|
| OT 100/ 220-240/1A4 2DIM P7 | PRH101 -USB | ▶ 6977078996938 |
| OT 100/ 220-240/1A4 2DIM P7 | CPR30 -USB | ▶ 6977078996945 |
| OT 100/ 220-240/1A4 2DIM P7 | NFC Scanner by TERTIUM Technology | ▶ 4055462203571 |
| OT 100/ 220-240/1A4 2DIM P7 | NFC Scanner by TERTIUM Technology | ▶ 4055462290281 |

Disclaimer

OSRAM products must never be directly exposed to external influences. Always provide adequate protection for relevant applications (covers, housings etc.) otherwise any warranty claim will be invalid.