

QUICKTRONIC® QT_i T5

● 1

● 2

● 3

220...240V

~

⏚

QUICKTRONIC® INTELLIGENT
QT_i 1x14/24/21/39 GII

lamp	U _N [V]	I _N [A]	f _N [Hz]	λ	t _a [°C]
1xHE14W	220...240	0.08	0; 50...60	0.92C	-20...50
1xHE21W		0.11		0.94C	
1xHO24W		0.12		0.96	
1xHO39W		0.18		0.98	



DC-contact
+ 0.5 μF
f: 0.1 μF


wire preparation
push in
+ 0.5...1.0 μF
f: 0.1 μF

Range of application: AC/DC 180V to 264V
Suitable for DC operation Range of battery voltage: 176V to 276V
Can be used for luminaires protection class I and II
Class II luminaires: no need to connect protective earth
Connect PE to case or PIN 3
Starting time < 1sec

A2 BAT

Made in Bulgaria

Temp.-Test
t_c = 75°C



picture only for reference, valid print on product ¹⁾

● 1

● 2

● 3

220...240V

~

⏚

QUICKTRONIC® INTELLIGENT
QT_i 1x14/24/21/39 GII

lamp	U _N [V]	I _N [A]	f _N [Hz]	λ	t _a [°C]
1xHE14W	220...240	0.08	0; 50...60	0.92C	-20...50
1xHE21W		0.11		0.94C	
1xHO24W		0.12		0.96	
1xHO39W		0.18		0.98	



DC-contact
s: 0.5 μF
f: 0.75 μF

wire preparation
push in
+ 0.5...1.0 μF
f: 0.1 μF

Range of application: AC/DC 180V to 264V
Suitable for DC operation Range of battery voltage: 176V to 276V
Can be used for luminaires protection class I and II
Class II luminaires: no need to connect protective earth
Connect PE to case or PIN 3
Starting time < 1sec

A2 BAT

Made in Bulgaria

Temp.-Test
t_c = 75°C



4)

5)

6)

7)

8)

wire preparation
push in
s: 0.5...1.0 μF
f: 0.1 μF

Range of application: AC/DC 180V to 264V
Suitable for DC operation Range of battery voltage: 176V to 276V
Can be used for luminaires protection class I and II
Class II luminaires: no need to connect protective earth
Connect PE to case or PIN 3
Starting time < 1sec


Temp.-Test
t_c = 75°C



leads max. 2m

leads max. 1m

U-OUT = 330V



QT_i 1x...


~ 220...240V

PE

leads max. ⁸⁾

■ 21, 22: 2.0m

■ 23, 24: 1.0m

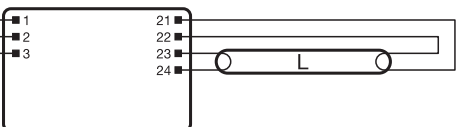

QT_i 2x...


~ 220...240V

PE

leads max. ⁸⁾

■ 21, 22: 2.0m

■ 23, 24: 1.0m

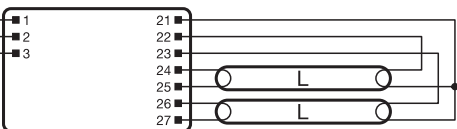

XXXXXXXXXX

P2125

XXXXXX

XXXXXXXXXX


P 21 25 X

Year ⁹⁾

Week ¹⁰⁾

Weekday ¹¹⁾

OSRAM

	QTI 1x14/24/21/39 GII	QTI 1x28/54/35/49 GII	QTI 1x35/49/80 GII	QTI 2x14/24/21/39 GII	QTI 2x28/54/35/49 GII	QTI 2x35/49/80 GII
10A (B/C) 	17 x	17 x	8 x	8 x	8 x	5 x
16A (B/C) 	28 x	28 x	13 x	13 x	13 x	9 x
	≤24 A	≤24 A	≤53 A	≤53 A	≤53 A	≤39 A
T_H	230 μs	230 μs	190 μs	190 μs	190 μs	230 μs

Ⓔ 1) picture only for reference, valid print on product. 2) lamp. 3) IDC-contact. 4) Wire Preparation. Push in. 5) Made in Bulgaria. 6) Range of application: AC/DC. Suitable for DC operation. Range of battery voltage. Can be used for luminaires protection class I + II. Class II luminaires: no need to connect protective earth. Connect PE to case or PIN. Starting time. 7) t_c point. 8) Max. permitted cable length between ECG and lamp; leads max. 9) Year. 10) Week. 11) Weekday

Ⓓ 1) Foto dient nur als Referenz, gültiger Aufdruck auf dem Produkt. 2) Lampe. 3) IDC Kontakt. 4) Kabelvorbereitung. Einstecken. 5) Hergestellt in Bulgarien. 6) Anwendungsbereich: AC/DC. Für DC-Betrieb geeignet. Batteriespannungsbereich. Verwendbar für Leuchten der Schutzklasse I + II. Klasse-II-Leuchten: Schutzleiter-Anschluss nicht erforderlich. Schutzleiter an Gehäuse oder PIN anschließen. Startzeit. 7) t_c-Punkt. 8) Max. Leitungslänge zwischen EVG und Lampe; Leitungslänge max. 9) Jahr. 10) Woche. 11) Wochentag

Ⓡ 1) изображение используется только в качестве примера, действительная печать на продукте. 2) Лампа. 3) врезной контакт. 4) Подготовка провода. вставка нажатием. 5) Сделано в Болгарии. 6) Область применения: переменный/постоянный ток. Можно использовать для работы на постоянном токе. Диапазон напряжения аккумуляторной батареи. Можно использовать для светильников класса защиты I + II. Светильники класса II: защитное заземление не требуется. Выполните защитное заземление на корпус или штыре. Время запуска. 7) датчик контроля теплового режима. 8) Макс. длина кабеля между прибором и лампой. 9) год. 10) неделя. 11) день недели

Ⓚ 1) Сурет тек мысал ретінде берілген, жарамды басылым өнімде. 2) Шам. 3) Саңылаулы байланыс. 4) Сымды дайындау. Итеру. 5) Болгарияда жасалған. 6) Қолдану аясы: АТ/ТТ. ТТ жұмысы үшін жарамды. Батарея кернеуінің ауқымы. I + II қорғаныс класындағы шырақтар үшін пайдаланылуы мүмкін. II класты шырақтар: қорғаныстық жерге тұйықтау қосу қажет емес. РЕ өткізгішін қорапқа немесе PIN құрылғысына қосыңыз. Іске қосылу уақыты. 7) ТБ нүктесі. 8) Құрылғы мен шам арасындағы кабельдің максималды ұзындығы. 9) Жыл. 10) Апта. 11) Жұмыс күндері

Ⓔ Εισαγωγή: OSRAM SALES ΥΠ. ΕΛΛΑΔΟΣ, Ερμού 56 105 63 Αθήνα, Τηλ. Κεντρο: +30 2130994036, e-mail: greece@osram.com

Ⓔ Ⓔ Производитель/Дайындаушы: OSRAM GmbH, Марсель-Бройер-штрассе 6, 80807 Мюнхен, Германия. Импортёр/Импортертаушы: ООО «ОСРАМ-И/«ОСРАМ» ЖШС, 115230, Россия/Ресей, г. Москва/Мәскеу қ., Варшавское ш., д./үй 47, корпус 4, тел.: +7 499 649 7070

Ⓔ Ⓔ Forgalmazó: OSRAM a.s. Magyarországi Fióktelepe, 1119 Budapest, Fehérvári út 84/A

Ⓔ Ⓔ OSRAM Sp. z o.o., Aleje Jerozolimskie 94, 00-807 Warszawa

Ⓔ Ⓔ Osram Teknolojileri Ticaret A.Ş., Büyükdere Cad. Esentepe Mah. Bahar Sok. No: 13/4, River Plaza Kat:4 Şişli-İstanbul, Phone: +90 212 703 43 00

Ⓔ Ⓔ Uvoznik: OSRAM EOOD, Koshovete area, sec. 225, № 879, 4199 Trud, Municipality Maritsa, Plovdiv District, Bulgaria, tel.: +359 32 348 110

Ⓔ Ⓔ OSRAM EOOD, Koshovete area, sec. 225, № 879, 4199 Trud, Municipality Maritsa, Plovdiv District, Bulgaria, tel.: +359 32 348 110

Ⓔ Ⓔ Производител: OSRAM GmbH, Марсел-Бройер-штрассе 6, 80807 Мюнхен, Германия. Доставчик: ОСРАМ ЕООД, Местност Кошовете, кв. 225, № 879, 4199 Труд, Община Марица, Област Пловдив, България, тел.: +359 32 348 110

www.osram.ru/EAC



C10238698
G15103728
15.11.21



OSRAM GmbH
Berliner Allee 65
86153 Augsburg
Germany
www.osram.com