

OTi DALI 80/220-240/2A1 LT2 L

OPTOTRONIC Intelligent – DALI LEDset LT2 (SELV) | Linear constant current LED driver – Dimmable



Product family features

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Versatile DALI window driver up to 80 W due to flexible output characteristic
- Supply voltage: 220...240 V
- Available with output current range: up to 2,100 mA
- Constant Lumen Output (CLO)
- Integrated customizable thermal management (Driver Guard)
- DALI-2 certified (Part -101,-102 and -207)

Product family benefits

- Fully programmable via software (DALI Interface)
- Flexible current setting (LEDset2)
- Lifetime: up to 100,000 h (temperature at $T_c = 65\text{ °C}$, max. 10 % failure rate)
- High-quality dimming of 1...100 % by amplitude dimming (except 80 W versions)
- High quality of light thanks to <1% output ripple current
- Very high efficiency
- Very low standby power consumption: < 0.15 W *
- Fulfill safety requirement due to overload, overtemperature, Hot Plug protection

Areas of application

- Linear lighting for office, education, storage areas and retail
 - Installation in emergency lighting systems according to IEC 61347-2-13, appendix J
 - Suitable for luminaires of protection class I
-

Versatile scope of application due to OSRAM DALI Technology:

- Easy to use in corridors and restrooms because of three-level Corridor function
- Touch DIM® application: easy to control via pushbutton or sensor
- Energy efficient Touch DIM® operation due to automatic switch-off at sufficient residual light
- Suitable for emergency Installations (acc. to EN 60598-2-22 and IEC 61347-2-13, appendix J) thanks to DC detection (0 Hz, pulsating DC), on/off switchable
- Feedback of power consumption and operating hours (Fit for SMART GRID)
- Suitable for buildings according to EPBD/BREEAM/LEED due to automatic Constant Lumen Output setting
- Luminaire information for easy maintenance

Technical data

Electrical data

Device power loss	10 W ¹⁾
Nominal output voltage	20...54 V ²⁾
Input voltage DC	176...276 V
Nominal output current	1000...2100 mA
Inrush current	53 A ³⁾
Max. ECG no. on circuit breaker 10 A (B)	8
Max. ECG no. on circuit breaker 16 A (B)	13
Nominal output power	32...80 W
Input voltage AC	198...264 V ⁴⁾
Power factor λ	0.91C...0.99 ⁵⁾
U-OUT (working voltage)	< 60 V
Surge capability (L-N)	1 kV
Surge capability (L/N-Ground)	2 kV
Mains frequency	0/50/60 Hz
Protective conductor current	<2.0 mA
Nominal input voltage	220...240 V
Total harmonic distortion	< 20 %
Output current tolerance	± 3 % ⁶⁾
Maximum output power	80 W
Galvanic isolation	SELV
Output ripple current (100 Hz)	< 1 %
Current set	DALI / LEDset / Programmable

1) Maximum

2) Maximum 60 V


3) At 200 μ s

4) Permitted voltage range

5) Full load at 230 V


6) When use DALI

Typical Power Factor v Load

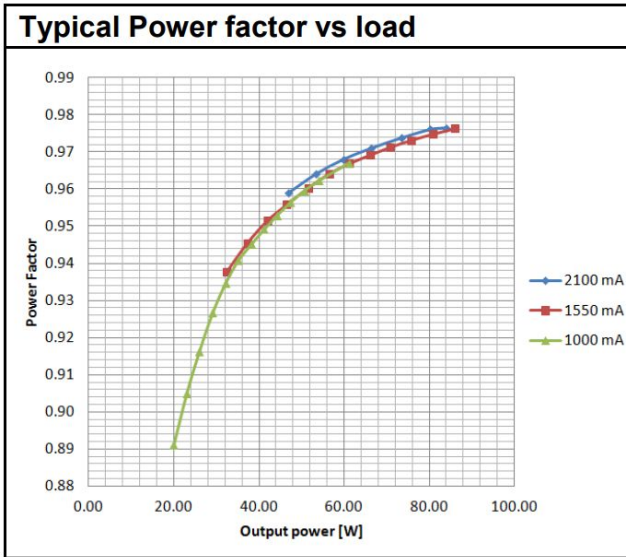


OTI DALI 80/220-240/2A1 LT2 L Typical Power Factor vs. Load

Operating Window

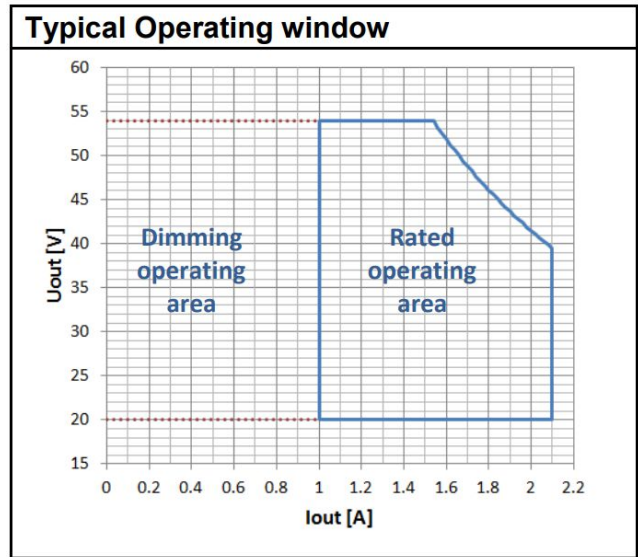


OTI DALI 80/220-240/2A1 LT2 L Operating Window

Typical THD v Load

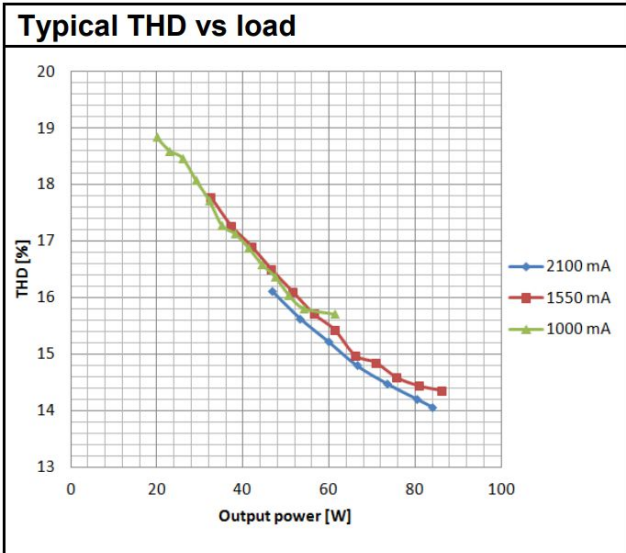


OTI DALI 80/220-240/2A1 LT2 L Typical THD Vs Load

Typical Iout v Rset LEDset2 mode

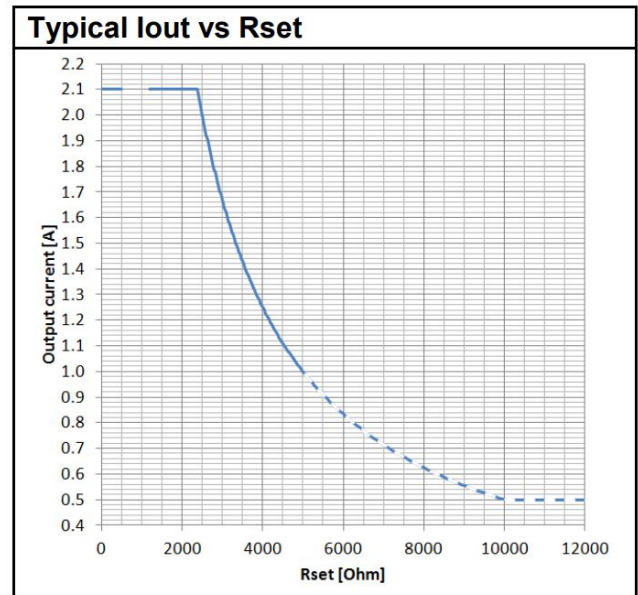


OTI DALI 80/220-240/2A1 LT2 L Typical Iout vs Rset (LEDset2 mode)

Typical Efficiency v Load 230 V 50 Hz

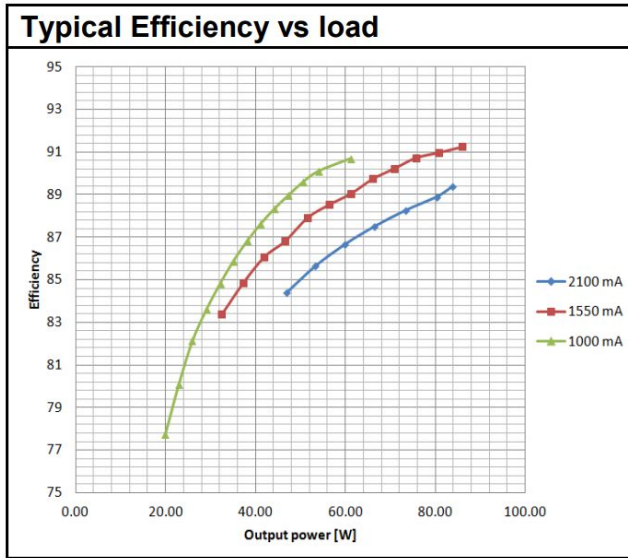

OTI DALI 80/220-240/2A1 LT2 L Typical Efficiency vs. Load (230 V / 50 Hz)

Dimensions & weight

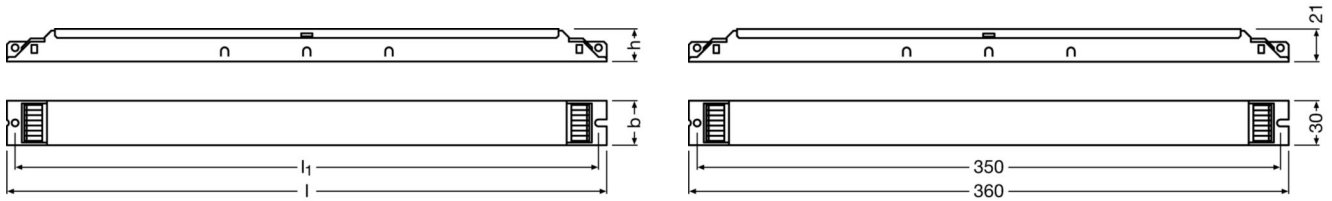

Product weight	270.00 g
Mounting hole spacing, width	0 mm
Mounting hole spacing, length	350.0 mm
Wire preparation length, output side	8.5...9.5 mm
Wire preparation length, input side	8.5...9.5 mm
Cable/wire length, output side	2000 mm
Cable cross-section, output side	0.5...1.5 mm ^{2 1)}
Cable cross-section, input side	0.5...1.5 mm ^{2 1)}
Length	360.0 mm
Height	21.0 mm

1) Solid or flexible leads

Colors & materials

Product color	White
Casing material	Metal

Temperatures & operating conditions

Max.housing temperature in case of fault	120 °C
Maximum temperature at tc test point	80 °C
Ambient temperature range	-25...+45 °C
Temperature range at storage	-25...85 °C
Permitted rel. humidity during operation	5...85 % ¹⁾

1) Maximum 56 days/year at 85 %

Lifespan

ECG lifetime	50000 h / 100000 h ¹⁾
---------------------	----------------------------------

1) At maximum $T_c = 75^\circ\text{C}$ / 10% failure rate / At $T_c = 65^\circ\text{C}$ / 10% failure rate

Additional product data

Encapsulated	No
---------------------	----

Capabilities

Max. cable length to lamp/LED module	2.0 m ¹⁾
Dimming range	1...100 % ²⁾
Dimming method	Amplitude Modulation / Pulse Width Modulation
Dimming interface	DALI-2 / Touch DIM / Touch DIM Sensor
Suitable for emergency lighting	Yes
Short-circuit protection	Automatic reversible
Overload protection	Automatic reversible
Overheating protection	Automatic reversible
Dimmable	Yes
Suitable for fixtures with prot. class	I
No-load proof	Yes
Type of connection, input side	Push terminal
Type of connection, output side	Push terminal
Constant lumen function	Programmable
Programming interface	DALI, LEDset

1) Output wires must be routed as close as possible to each other

2) For maximum nominal output current

Programmable features

DALI Settings	Yes
Emergency Mode	Yes
DALI-2 Luminaire Data	Yes
Configuration Lock	Yes
TouchDIM + Sensor	Yes
Corridor Functionality	Yes

Certificates & standards

Standards	Acc. to EN 61347-1 / Acc. to EN 61347-2-13 / Acc. to EN 55015 / Acc. to EN 61547 / Acc. to EN 61000-3-2 / Acc. to EN 62384 / Acc. to EN 62386
Approval marks – approval	CE / EL / VDE-ENEC / VDE-EMC / EAC / CCC / RCM
Type of protection	IP20

Logistical data

Commodity code	85044083900
-----------------------	-------------

Download Data

File		
Certificates	PDF	▶OT ENEC 40038447 270224
CAD data 3-dim	Compressed	▶OTI DALI 80 LT2 L CAD3PDF 270220
CAD data 2-dim	Compressed	▶OTI DALI 80 LT2 L CAD2PDF 270220
CAD data	Compressed	▶OTI DALI 80 LT2 L IGS 270220
CAD data	Compressed	▶OTI DALI 80 LT2 L STEP 270220
Mandatory Publications	PDF	▶OTI DALI LT2 UK DoC 4297920 01 140923
Mandatory Publications	PDF	▶OTI DALI LT2 CE 3366462 06 160523
User instruction	PDF	▶UI OTI DALI LT2 L

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899028050	OTi DALI 80/220-240/2A1 LT2 L	Shipping carton box 20 Pieces	385 x 160 x 100 mm	6.16 dm ³	175.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

Data privacy

This OSRAM driver can be configured using the Tuner4TRONIC software. This requires registering on www.myosram.com and downloading the Tuner4TRONIC software from the Internet. The Tuner4TRONIC software enables users to access and view the operational data of a luminaire or driver via the corresponding programming interfaces. A password key (Config Lock) must be set up in the driver via the Tuner4TRONIC software in order to control which users can access and view operational data. Follow the instructions for password setup. To grant an external person or company rights to access or view operational data, you can assign password keys. In this case, however, you are responsible for ensuring that the third party concerned takes notice of the information described here.

However, OSRAM can read out operating data from devices for maintenance and service purposes even when a password key has been assigned. In individual cases, OSRAM will also use its access rights in order to optimize or improve driver hardware and driver functions. In accordance with data privacy principles, any user of operating data (luminaire manufacturers, third parties with access rights) must ensure that personal data (e.g. name, address, location IDs) are only merged with the prior written consent of the person (end user) concerned. The respective user of the operating data is responsible for providing evidence of consent.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.