

OPTOTRONIC® LED Power Supply

1) **OPTOTRONIC® INTELLIGENT OTi DALI 25/220-240/700 NFC L**
Constant Current LED Power Supply

$I_{load}(mA)$	$P_{rated}(W)$	$U_{max}(V)$	U_{in}/f_{in}	$I_{in}(A)$	λ	$t_{st}(^{\circ}C)$
100-700	28	15-54	220-240V 0/50/60 Hz	0.14	0.42C- 0.97	-25...80

IS 15885 (Part 2/Sec 13) $t_c = 75^{\circ}C$

R-41056451 www.bis.gov.in

Connect PE to case or PIN 4 wire preparation push in $\pm 0.5-1.0^{\circ}$ 8-3mm

OSRAM

LED + ● 21-
LED - ● 22-
LED + ● 23-
LED - ● 24-
U-OUT = 60V

OTi DALI 25/220-240/700 NFC L

picture only for reference, valid print on product⁵⁾

● 1 ~ 220...
● 2 ~ 240V
○ 3
○ 4
○ 5
● 6 DA
● 7 DA

OPTOTRONIC® INTELLIGENT OTi DALI 35/220-240/1A0 NFC L
Constant Current LED Power Supply

$I_{load}(mA)$	$P_{rated}(W)$	$U_{max}(V)$	U_{in}/f_{in}	$I_{in}(A)$	λ	$t_{st}(^{\circ}C)$
200-1050	37	15-54	220-240V 0/50/60 Hz	0.20	0.61C- 0.98	-25...80

IS 15885 (Part 2/Sec 13) $t_c = 80^{\circ}C$

R-41056451 www.bis.gov.in

Connect PE to case or PIN 4 wire preparation push in $\pm 0.5-1.0^{\circ}$ 8-3mm

OSRAM

LED + ● 21-
LED - ● 22-
LED + ● 23-
LED - ● 24-
U-OUT = 60V

OTi DALI 35/220-240/1A0 NFC L

picture only for reference, valid print on product⁵⁾

● 1 ~ 220...
● 2 ~ 240V
○ 3
○ 4
○ 5
● 6 DA
● 7 DA

OPTOTRONIC® INTELLIGENT OTi DALI 50/220-240/1A4 NFC L
Constant Current LED Power Supply

$I_{load}(mA)$	$P_{rated}(W)$	$U_{max}(V)$	U_{in}/f_{in}	$I_{in}(A)$	λ	$t_{st}(^{\circ}C)$
400-1400	54	15-54	220-240V 0/50/60 Hz	0.30	0.72C- 0.98	-25...50

IS 15885 (Part 2/Sec 13) $t_c = 75^{\circ}C$

R-41056451 www.bis.gov.in




Connect PE to case or PIN 4 wire preparation push in $\pm 0.5-1.0^{\circ}$ 8-3mm

OSRAM

LED + ● 21-
LED - ● 22-
LED + ● 23-
LED - ● 24-
U-OUT = 60V

OTi DALI 50/220-240/1A4 NFC L

picture only for reference, valid print on product⁵⁾

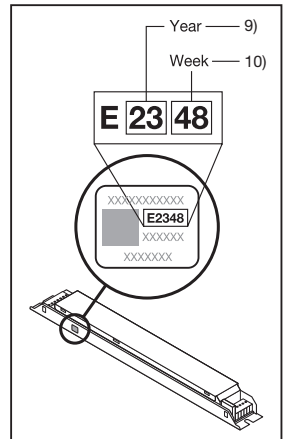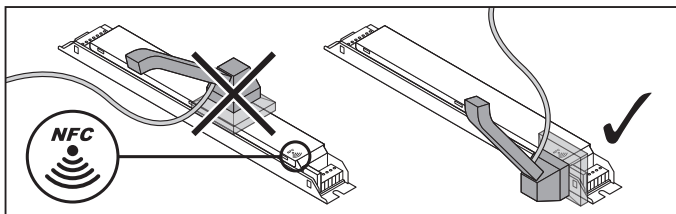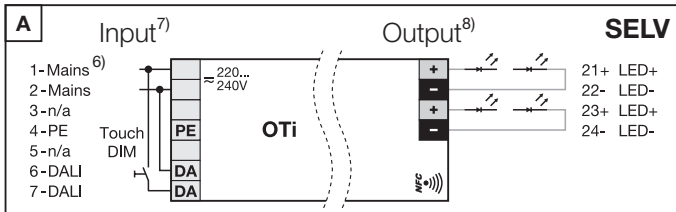

	OTi DALI 25	OTi DALI 35	OTi DALI 50
B16	31 x	31 x	20 x
B10	20 x	20 x	12 x
	≤ 18 A	≤ 18 A	≤ 21 A
T_H	190 μs	200 μs	230 μs
V_{NAC}	198–264 V		
V_{NDC}	176–276 V		

inventronics

