

OTi DALI 50/220-240/48 1CH OTi DALI 80/220-240/48 1CH

48 V Single-channel Constant Voltage LED driver
Dimmable range 0/0,1% - 100%

Benefits

Long lasting and high reliability.
DALI-2 single channel.
High efficiency in slim form factor.
Patent-pending flicker-free dimming until 0,1%.

Applications


Hospitality, cove lighting, shops.
Suitable for indoor CLASS I and CLASS II luminaires.



Housing material: plastic, white


* image for information purpose only

Approvals

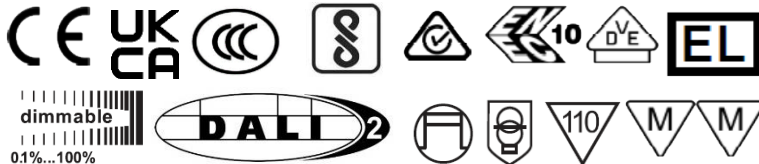

When not printed on product label, they are under evaluation.

L	346 mm	Total length
B	32 mm	Width
H	22 mm	Height



Product Features

- DALI-2 certified, with DALI 251-252-253
- Single channel
- Lamp Failure detection
- CLASS II independent housing
- Smart Power Supply
- SELV, Vout: 48,2 V
- t_a range -20...+45°C
- Overload/Over temperature and Short circuit protection
- Dimmable via DALI or Touch DIM
- Very low min dimming level: 0,1%
- Mains voltage: 220–240 V_{ac} / 176–276 V_{dc}
- 50'000 h lifetime at max t_c *
- 5 years guarantee*
- IP20 independent housing
- Output wire length up to 50 m
- Touch DIM compatibility
- Emergency lighting compatibility

*10% cumulated failure, 24 h = 14 h ON, 10 h Standby

Electrical specification

Item	Value	Unit	Remarks / Condition
INPUT	Nominal line voltage	220 – 240	V
	Mains line frequency	0 / 50 / 60	Hz
	AC voltage range	198 – 264	V
	DC voltage range	176 – 276	V
	Nominal current	50 W: 0,24 80 W: 0,39	A
	Total Harmonic Distortion (THD)	< 5	%
	Power factor λ	> 0,98	
	Efficiency in full load	50 W: 92 80 W: 93	%
	Device power loss	50 W: 4 80 W: 6	W
	Networked stand-by power	<0,30	W
	Protection Class	II	
	Suitable for fixtures with prot. Class	I / II	
	Inrush current	50 W: 41 A _{pk} / 150 μ s 80 W: 46 A _{pk} / 190 μ s	
	Max. units per circuit breaker:	50 W 80 W	Model
	Max. ECG no. on circuit breaker 10 A (B)	13 9	
	Max. ECG no. on circuit breaker 16 A (B)	21 15	
	Max. ECG no. on circuit breaker 25 A (B)	33 23	
	Max. ECG no. on circuit breaker 10 A (C)	22 15	
	Max. ECG no. on circuit breaker 16 A (C)	36 25	
	Max. ECG no. on circuit breaker 25 A (C)	56 39	
OUTPUT	Max. ECG no. on circuit breaker 10 A (D)	29 17	
	Max. ECG no. on circuit breaker 16 A (D)	46 28	
	Nominal voltage	48,2	V
	Voltage accuracy	± 2	%
	Voltage ripple	< 1	V _{pp}
	Nominal output power	50 W: 0 – 50 80 W: 0 – 80	W
	Maximum output power	50 W: 50 80 W: 80	W
	DC Output power (EL)	15	%
DIMMING	Galvanic isolation	SELV	
	Dimming interface	DALI 2.0	
	Dimming range	0,1 – 100	%
	Dimming method	PWM	
	TLA (Flicker and strobe effects)	P _{ST} < 1 SVM < 0,4	-
	Galvanic Isolation	Basic / Double	
ENVIRONMENTAL			When using for PELV, do connect the "+" to PE
			Proper DALI diagnostics with a min. load of 9% (4.5 / 7.5 W) and dimming > 3%
			DALI dimming steps (0 – 254)
			For every dimming condition (n.a. < 1%) Extended SVM metrics (10 kHz).
			Basic DALI to PRIM / Double DALI to SEC
	Ambient temperature range	50 W: -20...+50 80 W: -20...+45	°C
	Max. temperature at T _c test point	50 W: 70 80 W: 85	°C
	Max. case temperature in fault condition	110	°C
	Storage temperature range	-40...+85	°C
	Permitted rel. humidity during operation	5 – 85	%
	Surge capability	1 2	kV
	Environmental rating	Indoor	
	IP protection class	IP 20	
	Mains switching cycles	> 100000	cycles
	Expected ECG lifetime	30000	h
		50000	h
		100000	h

Item	Value	Unit	Remarks / Condition
No-load proof	Yes		Auto recovery
Intended for no-load operation	No		
Overheating protection	Yes		Auto recovery
Overload protection	Yes		Auto recovery + Smart Power
Short-circuit protection	Yes		Auto recovery
DIMENSIONS	Height	22	mm
	Length	346	mm
	Width	32	mm
	Weight	191	g
	Mounting holes interaxis	303	mm
	Casing material	Plastic	White
	Type of connection	Screw terminals	0,2 – 1,5 mm²
	Wire preparation length	6 / 5	mm

Protection

Over temperature, Overload, Short-circuit, Input overvoltage, Output overvoltage. Reversible.



- Input wires cross section: 0,5 – 2,5 mm². Screw driver: 3,5 mm
- Output wires cross section 0,2 – 1,5 mm². Screw driver: 2,5 mm
- Wire peeling: input 6 mm output 5 mm

LED wire length

The wire length from the ECG to the LED module can reach 50 m with verified EMI.


Below matrixes show the maximum LED load power according to cable length and section, at 25°C.

The proper wire section will ensure that the LED module input voltage is at least 45.6 V.

V _{out} 48,2V / nominal 50 W		Cable length [m]			
	AWG	mm²	50	60	70
Cable section	20	0.5	50 W	50 W	48 W
	18...8	0.75...10	50 W	50 W	50 W


V _{out} 48,2V / nominal 80 W			Cable length [m]			
	AWG	mm ²	40	50	60	70
Cable section	20	0.5	80 W	67 W	56 W	48 W
	18	0.75	80 W	80 W	80 W	71 W
	17...8	1...10	80 W	80 W	80 W	80 W

Values are indicative. Each connection may increase total voltage drop.

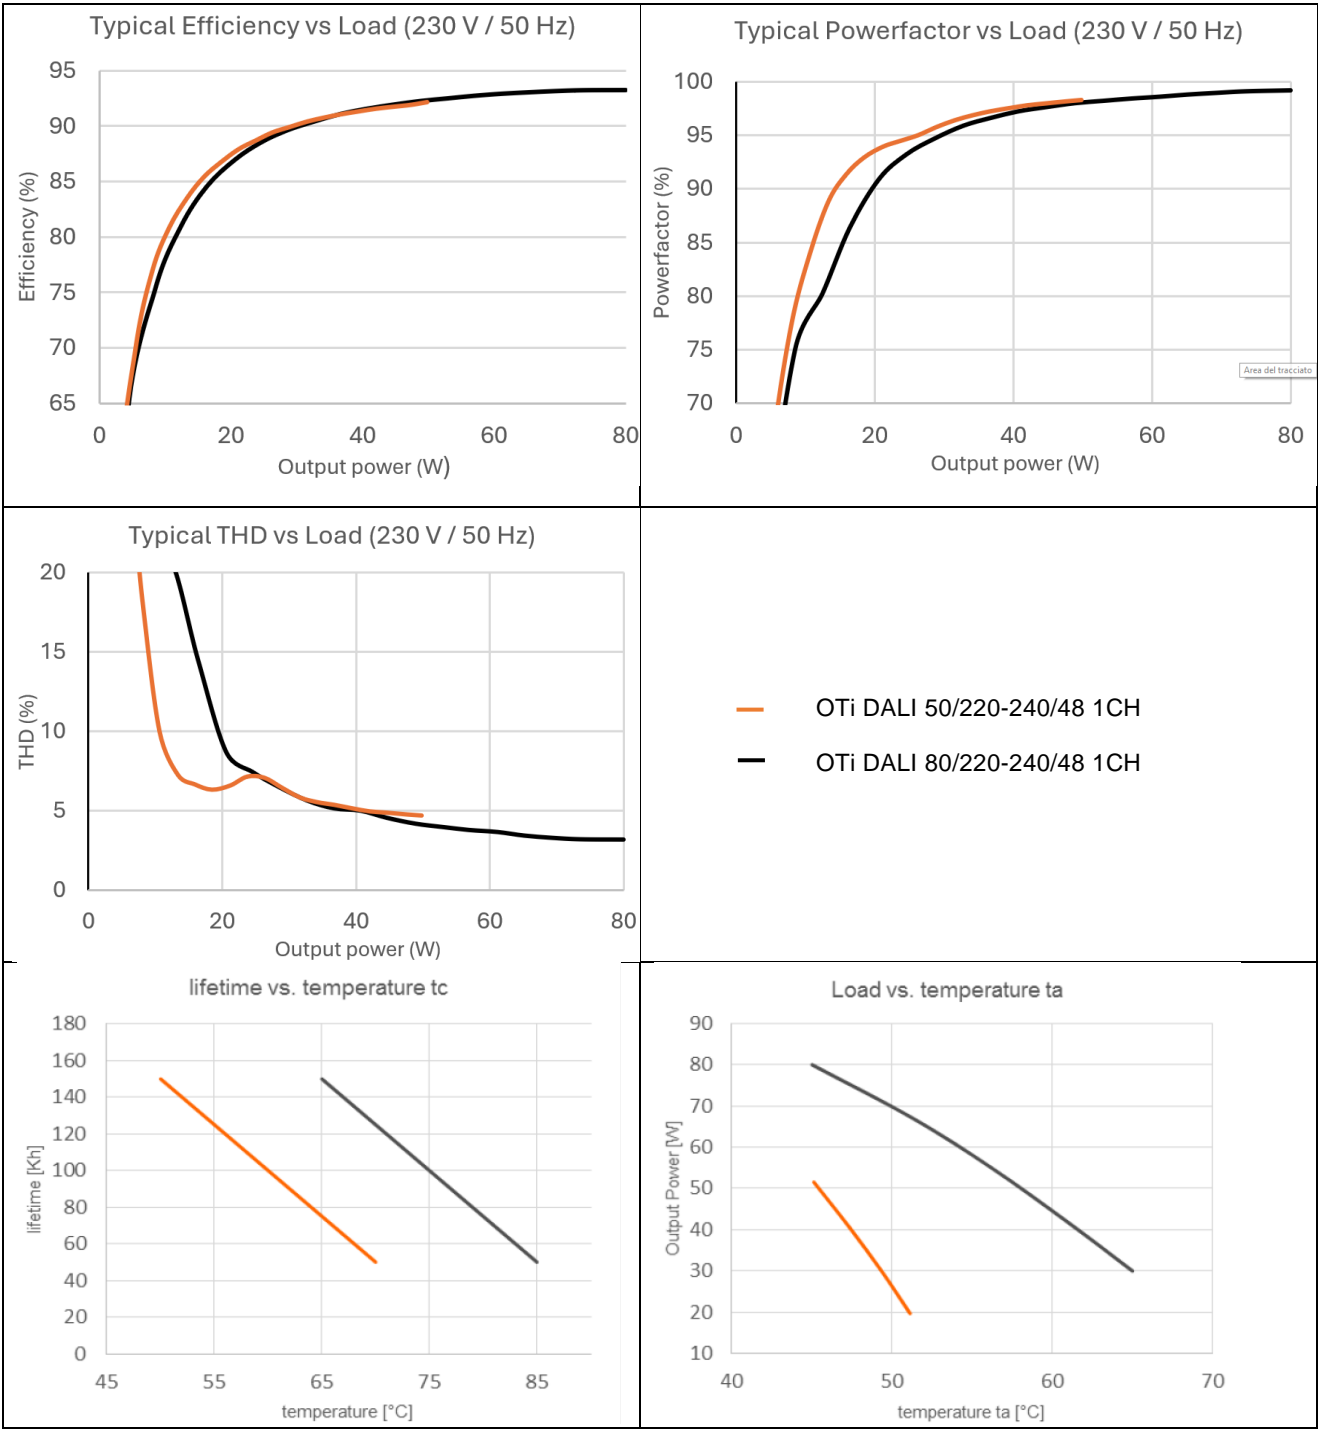

Touch DIM

This driver supports Touch DIM operation, which enables an easy control of light by means of a push-button and additional Presence Sensors and/or Light Sensor directly connected to the DALI terminals. No further programming is necessary, unless additional functions are to be implemented, like Corridor Function, fading time, dimming limit levels and so on. For these additional features, the Tuner for Tronic (T4T) is suggested as a convenient tool. For more information, please refer to OSRAM on-line documentation and catalogue.

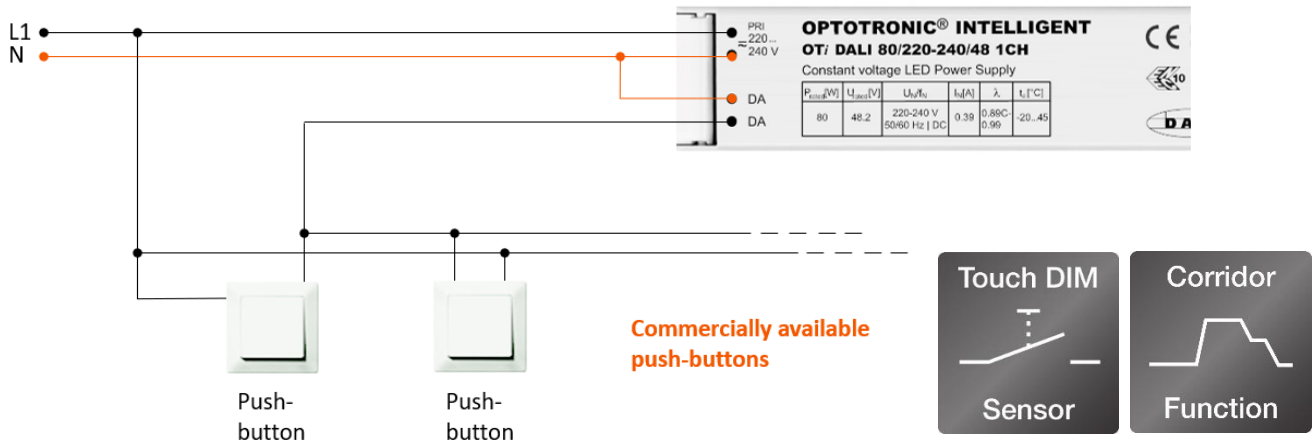

ADDITIONAL INFORMATION

- The Touch DIM input voltage ranges from 10 Vac to 264 Vac and has single insulation from mains.
- DALI and Touch DIM must never be used at the same time: control is achieved either with DALI controller or with the Touch DIM function (self-recognized and stored at the first Long Press following 5 s without DALI frames after last turn-on or previously programmed via DALI).
- Up to 20 ECGs can be controlled via direct push-button use. The number of push-buttons is limited by the sum of the overall cable length between switch(es) and the connected ECGs: maximum length should not exceed 25 m. In case of longer distances, a small 12 V transformer (AC buttons only) or a DALI repeater must be used to overcome line capacitance.

Touch DIM operation

The following item-list briefly describes the use of push-button for brightness control:

- Switching the lamp on/off: Short Press (< 0,5 s).
- Dimming: Long Press (> 0,5 s); the dimming direction is changed with each press.
- Store reference value: double-click (press twice within 0,4 s) while lamp is *On* → Switch to *Mode 2*.
- Delete reference value: double-click while lamp status is *Off* → Switch to *Mode 1*.
- Long Press while lamp status off: the lamp is switched on at the minimum dimmer setting and faded up until the push-button is released.

Operating Modes

- Mode 1: the switch-on value is always the last brightness/color before the lighting was switched off
- Mode 2: the switch-on value is the value stored by double clicking (default mode)

Re-synchronization

In case of many ECGs connected to the same Touch DIM buttons, there is a chance that an ECG will operate out of synchronism with the others (different on/off state or dimming level).

To have all of them back in synchronism, just apply a Long – Short – Long button press sequence, and in case apply a double-click afterwards to store a new common reference level.

Remarks

- **Product performances below minimal load condition:** the output power is still generated if the load is below the minimum output power (18 W for OTi DALI 50 and 30 W for OTi DALI 80), without any safety risk, but performances regarding THD, EMI, etc. are not guaranteed. See typical operation window graph for details.
- **Output terminals:** all the negative terminals are tied together.
- **Output short circuit protection:** the short circuit current is limited without damaging the unit. The short circuit protection is self-restoring.
- **Output overload protection:** in case of overload (< 125%), the device automatically dims down the output to keep the average power within 50 W (for OTi DALI 50) or 80 W (for OTi DALI 80) and let the LED load warm-up. When the load exceeds the 125% of maximum nominal output power, the LED load will blink to manifest a fault condition, till the short circuit limit (> 200%).
- **Input over voltage protection:** the ECG is capable of having input of max 350 V for 2 hours. To prevent damages to the unit, driver performs auto switch off when input voltage is > 280 V_{ac}, therefore driver operation in this abnormal condition is not guaranteed. The over-voltage protection is self-restoring.
- **Lamp failure detection:** the minimum load that doesn't trigger open circuit detection is 4.5 W (for OTi DALI 50) or 7.5 W (for OTi DALI 80).
- **No load operation:** do not put a switch between ECG and load.
- **Over temperature protection:** the driver is protected against temporary overheating, so it automatically dims down when t_c is exceeded, and eventually turns off. The protection is self-restoring.
- **Emergency lighting:** this LED power supply is suitable for emergency lighting fixtures acc. to EN 60598-2-22, with emergency default output factor EOFI = 0,15. The value is programmable up to EOFI = 1 with P_{max} 12 W and related duration time of 10 h at least. Function in emergency is ensured up to $t_a = 80^\circ\text{C}$ and $t_c = 96^\circ\text{C}$.
- **Ecodesign regulation information:**
Intended for use with LED modules only. Separated control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centers and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Standards

EN-55015

EN 61347-1

EN 61347-2-13

EN 61547

EN 61000-3-2

EN 60598-2-22

EN 62384

EN 62346

Inventronics GmbH

Head Office:

Parking 31-33

86574 Garching, Germany

Phone +49 89 6213-0

www.inventronicsglobal.com

Ordering information

Product name	EAN 10	EAN 40	Pieces / Box
OTi DALI 50/220-240/48 1CH	6977770432451	6977770432468	20
OTi DALI 80/220-240/48 1CH	6977770432475	6977770432482	20

inventronics
OSRAM Digital System is now Inventronics