


## OTI DX 25/220-240/700 NFC (NEW)

OPTOTRONIC Intelligent – DEXAL | Compact constant current LED driver – Dimmable

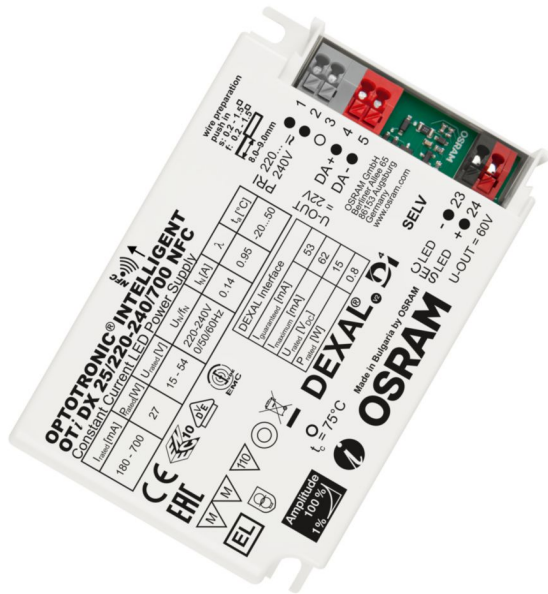

### Product family features

- Supply voltage: 220...240 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Line voltage: 198...264 V
- According to EN 61347-1, 61347-2-13, 62384
- RI suppression: to EN 55015/CISPR 15
- Immunity according to EN 61547
- Lifetime: up to 100,000 h
- Type of protection: IP20

### Product family benefits

- Versatile DALI window driver due to flexible output characteristic
- Integrated DEXAL Bus power supply for sensors and wireless radios
- Simplified luminaire design for wireless lighting control system and sensors
- Locking and unlocking of luminaire/driver data
- Advanced luminaire/driver data (power, energy, operating hours...) for analytics
- D4i certified incl. Parts 250, 251, 252, 253
- Easy and fast output current setting via NFC
- Very high efficiency
- High-quality dimming of 1...100 % by amplitude dimming



## Areas of application

- DEXAL, easy connection to different partner BMS systems
  - Suitable for "Works with OSRAM DEXAL" partner components
  - Installation in emergency lighting systems according to IEC 61347-2-13, appendix J
  - Suitable for use in luminaires with flexible current setting
  - Suitable for indoor SELV installations
  - Suitable for luminaires of protection classes I and II
  - Suitable for downlights, spotlights and LED panels
  - Installation via Cable Clamp Kit possible (depending on version of product)
- 

## Versatile scope of application due to OSRAM DALI Technology:

- Suitable for emergency Installations (acc. to EN 60598-2-22 and IEC 61347-2-13, appendix J) thanks to DC detection (0 Hz, pulsating DC), on/off switchable
- Feedback of power consumption and operating hours (Fit for SMART GRID)
- Suitable for buildings according to EPBD/BREEAM/LEED due to automatic Constant Lumen Output setting

## Technical data

### Electrical data

Max. ECG no. on circuit breaker 10 A (B)	18
Max. ECG no. on circuit breaker 16 A (B)	28
Maximum output power	27 W
Nominal output current	180...700 mA <sup>1)</sup>
Nominal output power	27 W <sup>2)</sup>
Nominal output voltage	15...54 V <sup>3)</sup>
Nominal input voltage	220...240 V
Input voltage AC	198...264 V <sup>4)</sup>
Input voltage DC	176...276 V
Efficiency in full-load	88 % <sup>5)</sup>
Galvanic isolation DALI/mains	SELV
Galvanic isolation DALI/output	SELV
Galvanic isolation primary/secondary	SELV
Inrush current	15 A <sup>6)</sup>
Networked standby power	≤0.10 W <sup>5)</sup>
Power factor λ	0.67C...0.97
Mains frequency	0/50/60 Hz
Surge capability (L-N)	1 kV
Surge capability (L/N-Ground)	2 kV
U-OUT (working voltage)	60 V
Current set	DALI / NFC
DEXAL Guaranteed Supply Current	53 mA
DEXAL Peak Supply Current	60 mA
DEXAL Supply Voltage	15 V
Output current tolerance	±3 %
Output ripple current (100 Hz)	< 3 % <sup>7)</sup>
Protective conductor current	not relevant
Total harmonic distortion	< 10 % <sup>8)</sup>
Default output current	500 mA

1) ±3%

2) Partial load 7...27 W

3) Maximum 60 V

4) Permitted voltage range


5) at 230 V, 50 Hz

6)  $t_{width} = 220 \mu s$  (measured at 50 %  $I_{peak}$ )

7) Ripple average at 100 Hz


8) At full load, 220...240 V, 50 Hz / see graphs

## Typical Power Factor v Load

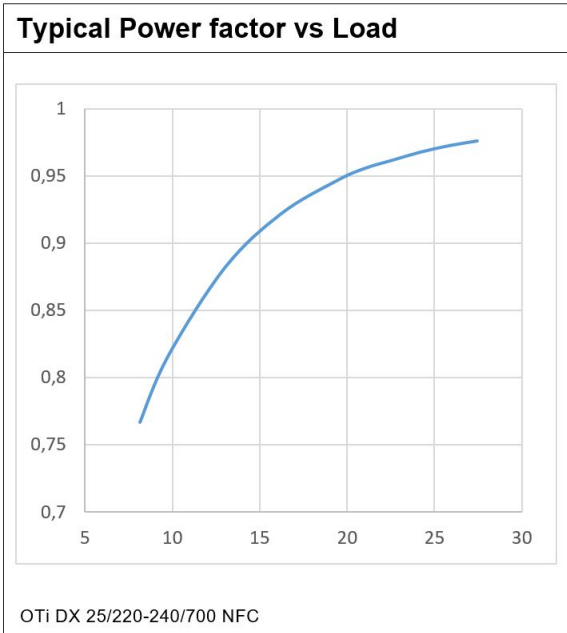


OTi DX 25/220-240/700 NFC

## Operating Window

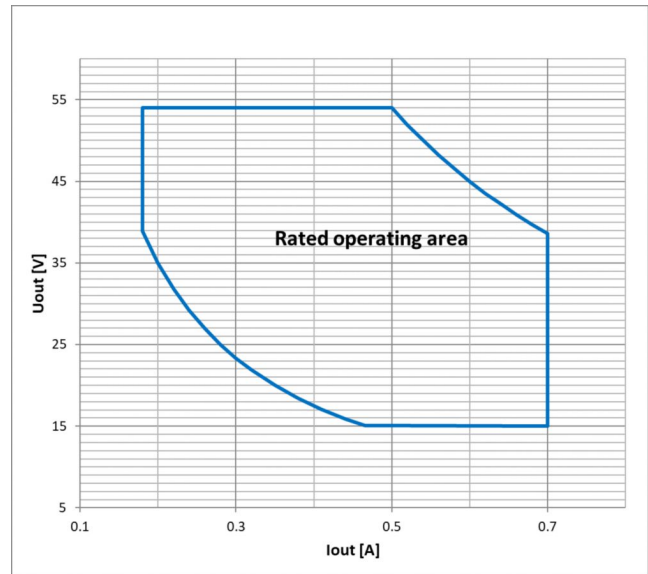


OTi DX DALI 25 NFC Operating window

## Typical THD v Load

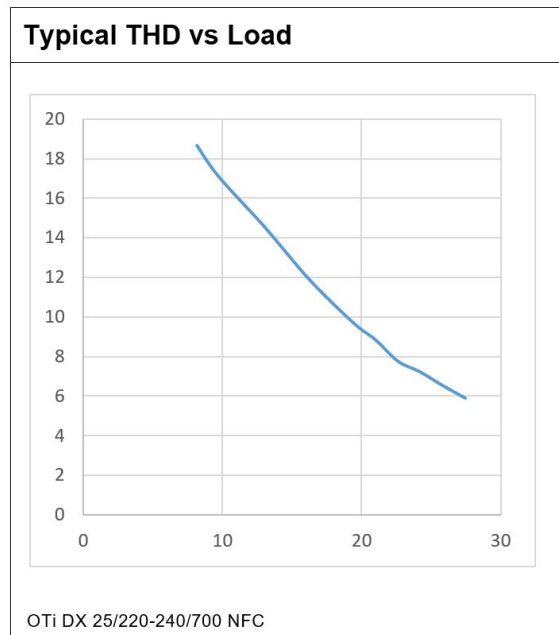


OTi DX 25/220-240/700 NFC

## Typical Efficiency v Load 230 V 50 Hz

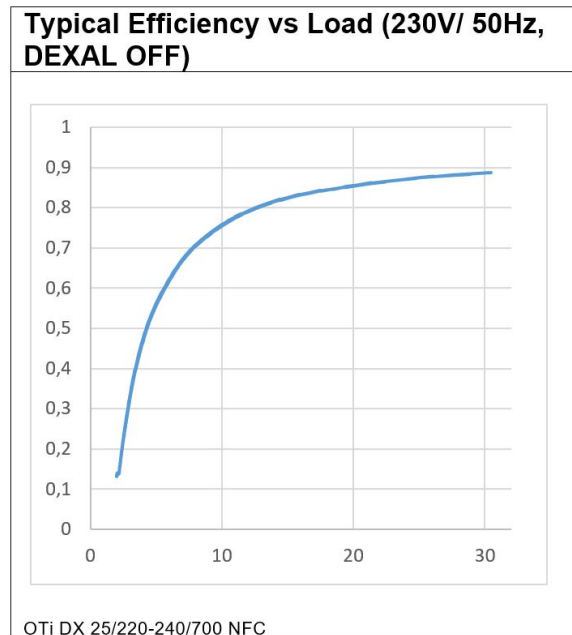

OTi DX 25/220-240/700 NFC

## Dimensions & weight

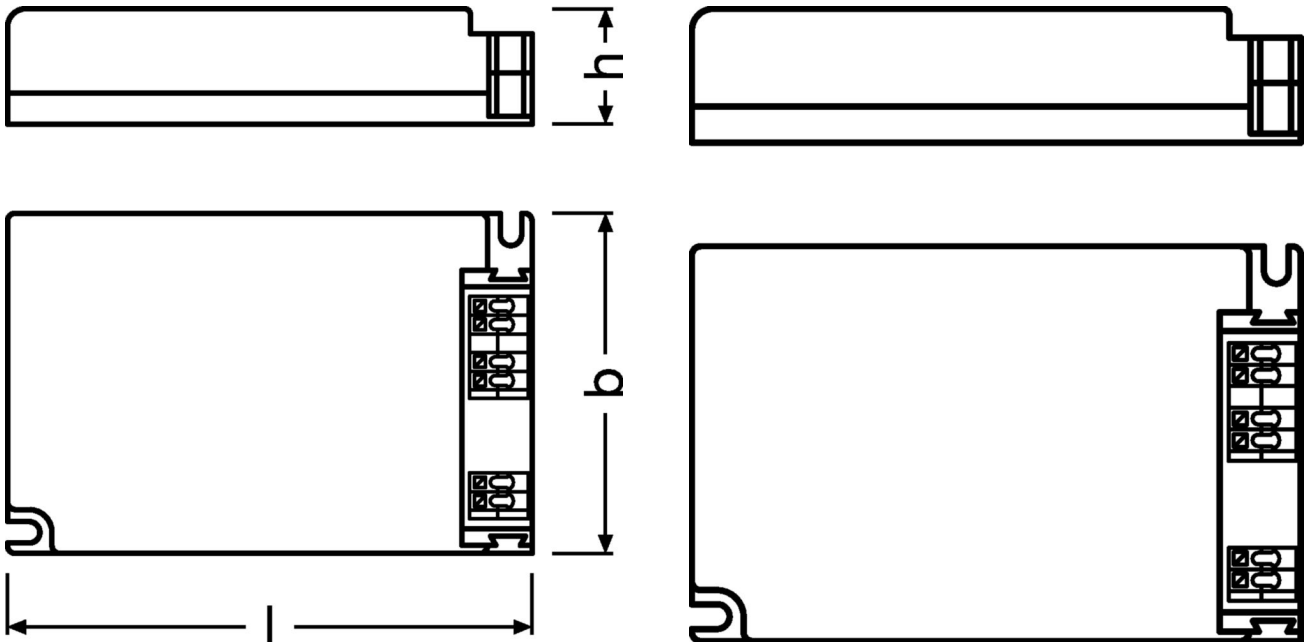

<b>Product weight</b>	155.00 g
<b>Length</b>	103.0 mm
<b>Height</b>	29.5 mm
<b>Width</b>	67.0 mm
<b>Cable cross-section, input side</b>	0.2...1.5 mm <sup>2 1)</sup>
<b>Cable cross-section, output side</b>	0.2...1.5 mm <sup>2 1)</sup>
<b>Cable/wire length, output side</b>	2000 mm
<b>Mounting hole spacing, length</b>	94.0 mm
<b>Mounting hole spacing, width</b>	58.0 mm
<b>Wire preparation length, input side</b>	8.0...9.0 mm
<b>Wire preparation length, output side</b>	8.0...9.0 mm

1) Solid or flexible leads

## Colors & materials

<b>Casing material</b>	Plastic
<b>Product color</b>	White

## Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+50 °C
<b>Max.housing temperature in case of fault</b>	110 °C
<b>Maximum temperature at tc test point</b>	75 °C <sup>1)</sup>
<b>Permitted rel. humidity during operation</b>	5...85 % <sup>2)</sup>
<b>Temperature range at storage</b>	-40...+85 °C

1) Maximum at the Tc-point

2) Maximum 56 days/year at 85 %

## Lifespan

<b>ECG lifetime</b>	50000 h / 100000 h <sup>1)</sup>
---------------------	----------------------------------

1)  $T_c = 75^\circ\text{C}$ , 0.2% / 1,000 h failure rate /  $T_c = 65^\circ\text{C}$ , 0.1% / 1,000 h failure rate

## Capabilities

<b>Max. cable length to lamp/LED module</b>	2.0 m <sup>1)</sup>
<b>Number of channels</b>	1
<b>Dimmable</b>	Yes
<b>Dimming interface</b>	DALI-2 / DEXAL / D4i
<b>Dimming method</b>	Amplitude Modulation
<b>Dimming range</b>	1...100 %
<b>Overload protection</b>	Automatic reversible
<b>Overheating protection</b>	Automatic reversible
<b>Short-circuit protection</b>	Automatic reversible
<b>Suitable for through-wiring</b>	Yes with optional cable clamp
<b>Suitable for fixtures with prot. class</b>	I / II
<b>Type of connection, input side</b>	Push terminal
<b>Type of connection, output side</b>	Push terminal
<b>Constant lumen function</b>	Programmable
<b>No-load proof</b>	Yes
<b>Programming interface</b>	DALI, NFC

1) Output wires must be routed as close as possible to each other

## Programming

Box programming	Yes
-----------------	-----

## Programmable features

Dim to Dark	Yes
Configuration Lock	Yes
Corridor Functionality	No
DALI Settings	Yes
DALI-2 Luminaire Data	Yes <sup>1)</sup>
Driver Guard	Yes
Emergency Mode	Yes
Soft Switch Off	Yes
Tuning Factor	Yes
TouchDIM + Sensor	No

1) Acc. DALI part 251

## Certificates & standards

Type of protection	IP20
Standards	Acc. to EN 61347-1 / Acc. to EN 61347-2-13 / Acc. to EN 55015 / Acc. to EN 61547 / Acc. to EN 61000-3-2 / Acc. to EN 62384 / Acc. to EN 62386 / Acc. to IEC 62386-101:Ed2 / Acc. to IEC 62386-102:Ed2 / Acc. to IEC 62386-207:Ed1
Approval marks – approval	ENEC 10 / VDE / EMC / EL / CE / DALI-2 / CCC / EAC / D4i

## Logistical data

Commodity code	85044083900
----------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	30-05-2024
Primary Article Identifier	4062172017947
Declaration No. in SCIP database	In work
SCIP_STATUS	In work
SCIP_ID	

## Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.



## Additional product information

- The DEXAL interface is polarity sensitive, even if the DEXAL bus power supply in the driver is turned off. Therefore the polarity of all connected drivers should not be mixed.
- For efficiency and standby power measurement, the D4i bus power supply shall be switched off by using Tuner4TRONIC. Refer to [www.tuner4tronic.com](http://www.tuner4tronic.com).

## Download Data

File		
Certificates	PDF	▶ OTI DALI DX 25 35 NFC CCC 2020171002003129 071223
Certificates	PDF	▶ OTI DALI DX 25 35 NFC CCC 2020171002003130 071223
Certificates	PDF	▶ OT ENEC 40038447 270224
CAD data 3-dim	Compressed	▶ OTI DX 25 35 NFC CAD3PDF 280120
Brochures	PDF	▶ Technical application guide DEXAL LED drivers (EN)
CAD data 2-dim	Compressed	▶ OTI DX 25 35 NFC CAD2PDF 280120
CAD data	Compressed	▶ OTI DX 25 35 NFC IGS 280120
CAD data	Compressed	▶ OTI DX 25 35 NFC STEP 280120
Mandatory Publications	PDF	▶ OTI DX DALI NFC CE 3770568 040923
Mandatory Publications	PDF	▶ OTI DALI DX NFC UK DoC 4281072 040923
User instruction	PDF	▶ OPTOTRONIC LED Power Supply

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172017947	OTI DX 25/220-240/700 NFC	Shipping carton box 20 Pieces	218 x 158 x 155 mm	5.34 dm <sup>3</sup>	161.84 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Data privacy

This OSRAM driver can be configured using the Tuner4TRONIC software. This requires registering on [www.myosram.com](http://www.myosram.com) and downloading the Tuner4TRONIC software from the Internet. The Tuner4TRONIC software enables users to access and view the operational data of a luminaire or driver via the corresponding programming interfaces. A password key (Config Lock) must be set up in the driver via the Tuner4TRONIC software in order to control which users can access and view operational data. Follow the instructions for password setup. To grant an external person or company rights to access or view operational data, you can assign password keys. In this case, however, you are responsible for ensuring that the third party concerned takes notice of the information described here.

However, OSRAM can read out operating data from devices for maintenance and service purposes even when a password key has been assigned. In individual cases, OSRAM will also use its access rights in order to optimize or improve driver hardware and driver functions. In accordance with data privacy principles, any user of operating data (luminaire manufacturers, third parties with access rights) must ensure that personal data (e.g. name, address, location IDs) are only merged with the prior written consent of the person (end user) concerned. The respective user of the operating data is responsible for providing evidence of consent.

## Accessories Optional

Product description	Accessory name	Accessory code
OTI DX 25/220-240/700 NFC	OT CABLE CLAMP B-STYLE	▶ 4052899077881
OTI DX 25/220-240/700 NFC	OT CABLE CLAMP B-STYLE TL	▶ 4052899948051
OTI DX 25/220-240/700 NFC	PRH101 -USB	▶ 6977078996938
OTI DX 25/220-240/700 NFC	CPR30 -USB	▶ 6977078996945

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.