

## IT DALI 40/220-240/450 D LT2 L (NEW)

ICUTRONIC Intelligent – DALI (non-isolated) | Linear constant current LED driver – Dimmable



### Product family features

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Versatile scope of application due to output power range of up to 75 W
- Supply voltage: 220...240 V
- Available with output current range: up to 500 mA
- Non-isolated drivers

### Product family benefits

- Versatile non-isolated DALI driver up to 75 W due to flexible output characteristic
- Fully programmable via software (DALI Interface)
- Flexible current setting (RSet)
- Lifetime: up to 100,000 h (temperature at  $T_c = 65\text{ }^\circ\text{C}$ , max. 10 % failure rate)
- High-quality dimming of 10...100 % by amplitude dimming
- No TouchDIM nor Corridor Function
- High quality of light thanks to <4% output ripple current
- High efficiency
- Low standby power consumption: < 0.25 W
- Fulfill safety requirement due to overload, overtemperature, Hot Plug protection

### Areas of application

- Linear and area lighting
- Industry lighting
- Suitable for luminaires of protection class I

## Technical data

### Electrical data

Nominal input voltage	220...240 V
Mains frequency	50/60 Hz
Input voltage AC	198...264 V <sup>1)</sup>
Input voltage DC	176...276 V
Nominal input current at 230 V	0.25 A
Power factor $\lambda$	0.46C...0.97 <sup>2)</sup>
Efficiency in full-load	92 % <sup>3)</sup>
Device power loss	4.6 W <sup>4)</sup>
Networked standby power	<0.25 W <sup>3)</sup>
Inrush current	33.6 A <sup>5)</sup>
Max. ECG no. on circuit breaker 10 A (B)	21
Max. ECG no. on circuit breaker 16 A (B)	33
Surge capability (L-N)	1 kV
Surge capability (L/N-Ground)	2 kV <sup>6)</sup>
Protective conductor current	<2.0 mA
Nominal output voltage	54...240 V <sup>7)</sup>
U-OUT (working voltage)	250 V <sup>8)</sup>
Nominal output current	100...450 mA
Minimum output current	100 mA
Default output current	100 mA
Output current tolerance	±5 %
Output ripple current (100 Hz)	< 4 % <sup>9)</sup>
Output PSTLM	<1
Output SVM	<0.4
Output current LEDset open	100 mA <sup>10)</sup>
Output current LEDset shorted	450 mA
Nominal output power	5.4...40 W
Maximum output power	40 W

1) AC or RAC

2) Full load, 220...240 V, 50 Hz / see graphs

3) at 230 V, 50 Hz

4) Maximum / At 230 V, full load

5)  $t_h = 120 \mu s$

6) L/N – PE acc to EN 61547 Clause 5.7


7) Maximum voltage  $\leq 250$  Vdc w/ Open Circuit

8) Maximum voltage, 1 hour maximum, unit might not operate in this abnormal condition

9) 100 Hz., low freq. ripple is negligible

10) LEDset vs LEDsetGND open

## Dimensions & weight

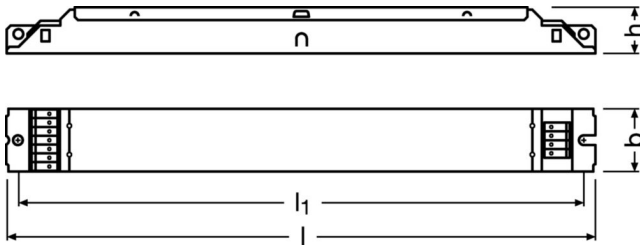

<b>Product weight</b>	205.00 g
<b>Length</b>	280.0 mm
<b>Width</b>	30.0 mm
<b>Height</b>	21.0 mm
<b>Mounting hole spacing, length</b>	270.0 mm
<b>Cable cross-section, input side</b>	0.5...1.5 mm <sup>2 1)</sup>
<b>Cable cross-section, output side</b>	0.5...1.5 mm <sup>2 1)</sup>
<b>Wire preparation length, input side</b>	8.0...9.0 mm
<b>Wire preparation length, output side</b>	8.0...9.0 mm

1) Solid/ Flexible Leads

## Colors & materials

<b>Casing material</b>	Metal
<b>Product color</b>	White

## Temperatures & operating conditions

<b>Ambient temperature range</b>	-25...+60 °C
<b>Maximum temperature at tc test point</b>	75 °C
<b>Max.housing temperature in case of fault</b>	110 °C
<b>Temperature range at storage</b>	-40...+85 °C
<b>Permitted rel. humidity during operation</b>	5...85 % <sup>1)</sup>
<b>Permitted relative humidity at storage</b>	5...85 %

1) Maximum 56 days/year at 85 %

## Lifespan

<b>ECG lifetime</b>	50000 h / 100000 h <sup>1)</sup>
---------------------	----------------------------------

1)  $T_c = 75^\circ\text{C}$ , 0.2% / 1,000 h failure rate /  $T_c = 65^\circ\text{C}$ , 0.1% / 1,000 h failure rate / 24H ON

## Additional product data

<b>Predecessor EAN</b>	4062172053280
------------------------	---------------

## Capabilities

<b>Programming interface</b>	Rset
<b>Control interface</b>	DALI-2
<b>Dimmable</b>	Yes
<b>Dimming interface</b>	DALI-2 / Corridor / Touch DIM
<b>Dimming range</b>	3...100 %
<b>Dimming method</b>	Full analogue dimming
<b>DALI-2 Diagnostic Data</b>	No
<b>DALI-2 Energy Data</b>	No
<b>Constant lumen function</b>	Programmable
<b>LEDset</b>	Yes
<b>Max. cable length to lamp/LED module</b>	2.0 m <sup>1)</sup>
<b>Suitable for fixtures with prot. class</b>	I
<b>Suitable for emergency lighting</b>	Yes
<b>Type of connection, input side</b>	Push terminal
<b>Type of connection, output side</b>	Push terminal
<b>Number of channels</b>	1
<b>Overheating protection</b>	Automatic reversible
<b>Overload protection</b>	Automatic reversible
<b>Short-circuit protection</b>	Automatic reversible
<b>Intended for no-load operation</b>	No
<b>No-load proof</b>	Yes

1) Output wires must be routed as close as possible to each other

## Programming

Programming device	DALI magic
Tuner4TRONIC Field App	Yes
Box programming	No

## Programmable features

DALI Settings	Yes
DALI-2 Luminaire Data	No
Dim to Dark	No
Driver Guard	Yes
Emergency Mode	Yes

## Certificates & standards

Approval marks – approval	CE / ENEC / CCC / BIS / RCM <sup>1)</sup>
Standards	Acc. to IEC 61347-1 / Acc. to IEC 61347-2-13 / Acc. to IEC 62384 / Acc. to IEC 61000-3-2 / Acc. to IEC 61000-3-3 / Acc. to IEC 61547
Type of protection	IP20

1) In preparation

## Logistical data

Commodity code	85044083900
----------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	25-10-2024
Primary Article Identifier	4062172380096   6977770436381
Declaration No. in SCIP database	In work
SCIP_STATUS	In work
SCIP_ID	

### Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Download Data

File		
Certificates	PDF	▶ OT ENEC 40038085 230824
Certificates	PDF	▶ CCC_2023171002005108 IT DALI 220- 40 D LT2 L
CAD data 3-dim	Compressed	▶ IT DALI D LT2 L CAD3PDF 090824
Product Datasheet	PDF	▶ IT DALI 40 D LT2 L DS 050824
CAD data 2-dim	Compressed	▶ IT DALI D LT2 L CAD2PDF 090824
CAD data	Compressed	▶ IT DALI D LT2 L STEP 090824
Mandatory Publications	PDF	▶ IT DALI D LT2 L CE 4511886 201123
Mandatory Publications	PDF	▶ IT DALI D LT2 L UK DoC 4511888 201123
User instruction	PDF	▶ UI IT DALI 220 240 D LT2 L



## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172380096	IT DALI 40/220-240/450 D LT2 L	Shipping carton box 20 Pieces	303 x 159 x 105 mm	5.06 dm <sup>3</sup>	211.35 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.