

## ETi DALI 35/220-240/400 D LT2 L

ICUTRONIC Intelligent – DALI (non-isolated) | Linear constant current LED driver – Dimmable



### Product family features

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Versatile scope of application due to output power range of up to 75 W
- Supply voltage: 220...240 V
- Available with output current range: up to 500 mA
- Non-isolated drivers

### Product family benefits

- Versatile non-isolated DALI driver up to 75 W due to flexible output characteristic
- Fully programmable via software (DALI Interface)
- Flexible current setting (RSet)
- Lifetime: up to 100,000 h (temperature at  $T_c = 65^\circ\text{C}$ , max. 10 % failure rate)
- High-quality dimming of 10...100 % by amplitude dimming
- No TouchDIM nor Corridor Function
- High quality of light thanks to <4% output ripple current
- High efficiency
- Low standby power consumption: < 0.25 W
- Fulfill safety requirement due to overload, overtemperature, Hot Plug protection

### Areas of application

- Linear and area lighting
- Industry lighting
- Suitable for luminaires of protection class I

## Technical data


### Electrical data

Max. ECG no. on circuit breaker 10 A (B)	18
Max. ECG no. on circuit breaker 16 A (B)	30
Maximum output power	35 W
Nominal output current	75...400 mA
Nominal output power	4...35 W
Nominal output voltage	54...240 V
Nominal input voltage	220...240 V
Input voltage AC	198...264 V
Input voltage DC	176...276 V
Device power loss	3.0 W
Efficiency in full-load	92 % <sup>1)</sup>
Inrush current	≤ 28 A
Power factor λ	0.46C...0.97
Mains frequency	0/50/60 Hz
Surge capability (L-N)	1 kV
Surge capability (L/N-Ground)	2 kV
U-OUT (working voltage)	< 250 V
Current set	DALI / Rset / Programmable
Output current tolerance	±5 %
Output ripple current (100 Hz)	< 4 %
Total harmonic distortion	< 10 %
Default output current	35 mA <sup>2)</sup>

1) at 230 V, 50 Hz


2) LEDset deactivated

## Typical Power Factor v Load

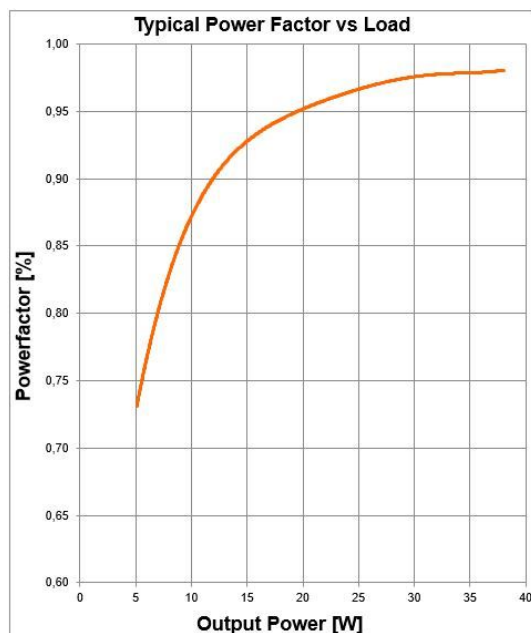


Typical Power Factor vs. Load ETI DALI 35/220-240/400 D LT2 L

## Operating Window

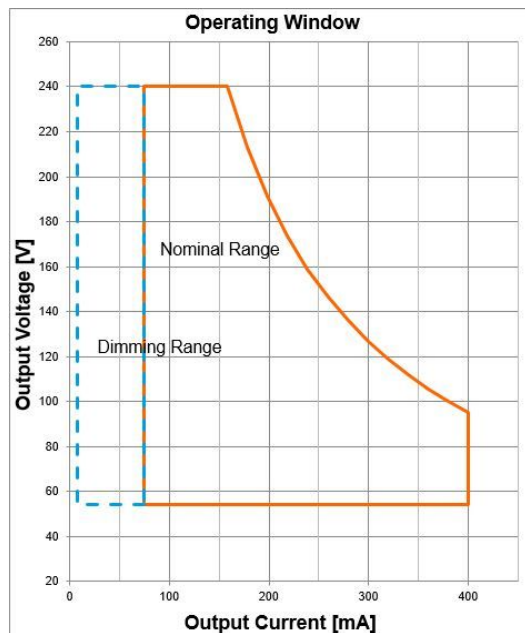


Operating Window ETI DALI 35/220-240/400 D LT2 L

## Typical THD v Load

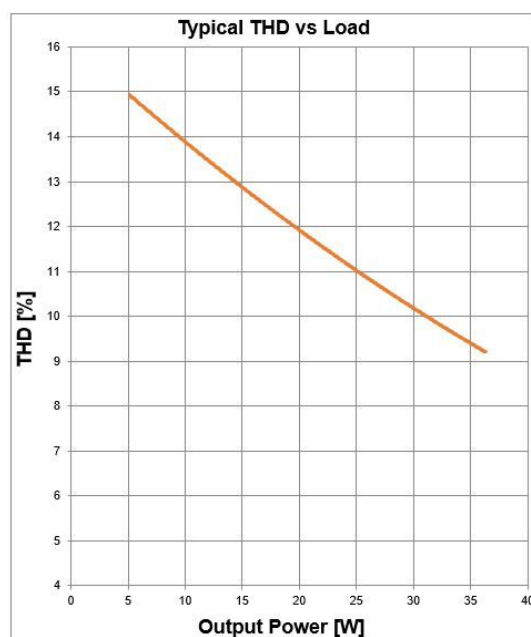


Typical THD Vs Load ETI DALI 35/220-240/400 D LT2 L

## Typical Efficiency v Load 230 V 50 Hz

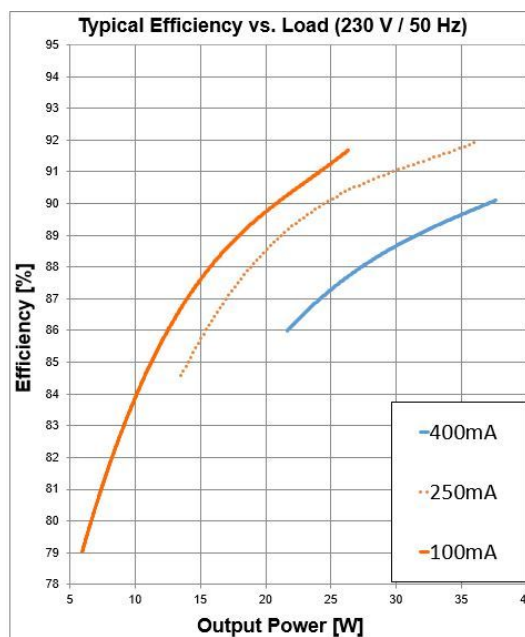

Typical Efficiency vs. Load (230 V / 50 Hz) ETI DALI 35/220-240/400 D LT2 L

## Dimensions & weight

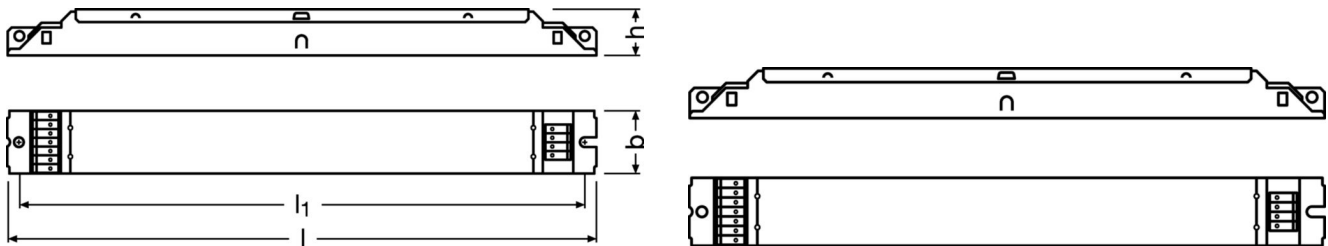

Product weight	205.00 g
Length	280.0 mm
Height	21.0 mm
Width	30.0 mm
Cable cross-section, input side	0.5...1.5 mm <sup>2</sup>
Cable cross-section, output side	0.5...1.5 mm <sup>2</sup>
Mounting hole spacing, length	270.0 mm
Wire preparation length, input side	8.0...9.0 mm
Wire preparation length, output side	8.0...9.0 mm

## Colors & materials

Casing material	Metal
-----------------	-------

## Temperatures & operating conditions

Ambient temperature range	-25...+50 °C
Max.housing temperature in case of fault	110 °C
Maximum temperature at tc test point	75 °C
Permitted rel. humidity during operation	5...85 % <sup>1)</sup>
Permitted relative humidity at storage	5...85 %
Temperature range at storage	-40...+85 °C

1) Maximum 56 days/year at 85 %

## Lifespan

ECG lifetime	50000 h / 100000 h
--------------	--------------------

## Capabilities

Max. cable length to lamp/LED module	2.0 m <sup>1)</sup>
Number of channels	1
Dimmable	Yes
Dimming interface	DALI-2
Dimming method	Full analogue dimming
Dimming range	10...100 %
Overload protection	Automatic reversible
Overheating protection	Automatic reversible
Short-circuit protection	Automatic reversible
Suitable for emergency lighting	Yes
Suitable for fixtures with prot. class	I
Type of connection, input side	Push terminal
Type of connection, output side	Push terminal
Constant lumen function	Programmable
No-load proof	Yes
Programming interface	Rset

1) Output wires must be routed as close as possible to each other

### Programmable features

DALI Settings	Yes
DALI-2 Luminaire Data	No
Driver Guard	Yes
Emergency Mode	Yes

### Certificates & standards

Type of protection	IP20
Standards	Acc. to IEC 61347 / Acc. to IEC 61347-2-13 / Acc. to IEC 62384 / Acc. to IEC 62386 / Acc. to IEC 61000-3-2 / Acc. to IEC 61000-3-3 / Acc. to IEC 61547
Approval marks – approval	CE / EL / ENEC 05 / EAC / CCC / BIS / RCM

### Logistical data

Commodity code	85044083900
----------------	-------------

### Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.



### Download Data

File		
Certificates	PDF	▶ EATON(CEAG)-Conformity declaration AM28155 ETI DALI 35/220-240/400 D LT2 L
Certificates	PDF	▶ INOTEC-Conformity declaration AM28155 ETI DALI 35/220-240/400 D LT2 L
Certificates	PDF	▶ OT ENEC 40038085 230824
CAD data 3-dim	Compressed	▶ ETI DALI D LT2 L CAD3PDF 270220
CAD data 2-dim	Compressed	▶ ETI DALI D LT2 L CAD2PDF 270220
CAD data	Compressed	▶ ETI DALI D LT2 L IGS 270220
CAD data	Compressed	▶ ETI DALI D LT2 L STEP 270220
Mandatory Publications	PDF	▶ ETI DALI D LT2 L CE 3971160 05 040523
Mandatory Publications	PDF	▶ ETi DALI D LT2 L UK DoC 4281296 01 090823
User instruction	PDF	▶ ICUTRONIC INTELLIGENT LED Power Supply

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172053303	ETi DALI 35/220-240/400 D LT2 L	Shipping carton box 20 Pieces	303 x 159 x 105 mm	5.06 dm <sup>3</sup>	127.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.