

## OT FIT 380/220-400/1A4 D NFC HC L (NEW)

OPTOTRONIC FIT D NFC HC L | Linear / Area Constant Current – Non dimmable



### Product family features

- Line frequency: 47.5...60 Hz
- Versatile scope of application due to output power range of up to 380 W
- Supply voltage: 220...240 V / 277 V / 400 V
- Available with output current range: up to 1,400 mA
- Non-isolated drivers

### Product family benefits

- Global usage - CE & cURus approval
- Flexible and future-proof current setting via NFC (Near Field Communication)
- Lifetime: up to 100,000 h (temperature at  $T_c = 65\text{ °C}$ , max. 10 % failure rate)
- Higher quality of light thanks to < 1% output ripple current
- Very high efficiency (up to 97%)
- Protection against 4 kV burst and 2 kV surge voltage (L-N and L-N/PE)

## Areas of application

- Linear and area lighting
- Greenhouse lighting
- Industry lighting
- Suitable for luminaires of protection class I

## Technical data

### Electrical data


Nominal input voltage	220...240/277/400 V
Nominal output current	400...1400 mA
Nominal output power	140...380 W
Nominal output voltage	150...550 V
Maximum output power	380 W
Mains frequency	50/60 Hz
Input voltage AC	198...440 V
Input voltage DC	not relevant
Default output current	400 mA
Device power loss	20 W
Efficiency in full-load	97 % <sup>1)</sup>
Inrush current	≤ 11 A / ≤ 19 A <sup>2)</sup>
Max. ECG no. on circuit breaker 10 A (B)	8
Max. ECG no. on circuit breaker 16 A (B)	13 <sup>3)</sup>
Output current tolerance	±5 %
Output PSTLM	≤1
Output ripple current (100 Hz)	< 1 %
Output SVM	≤0.4
Power factor λ	> 0.99
Surge capability (L-N)	2 kV
Surge capability (L/N-Ground)	2 kV
Total harmonic distortion	< 10 %
U-OUT (working voltage)	600 V
Current set	NFC

1) at 400 V, 50 Hz


2) At 230V / At 400V

3) At 230 V

## Typical Power Factor v Load

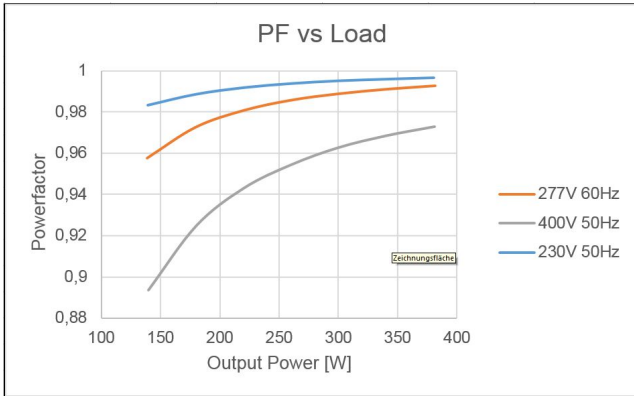


## Typical THD v Load

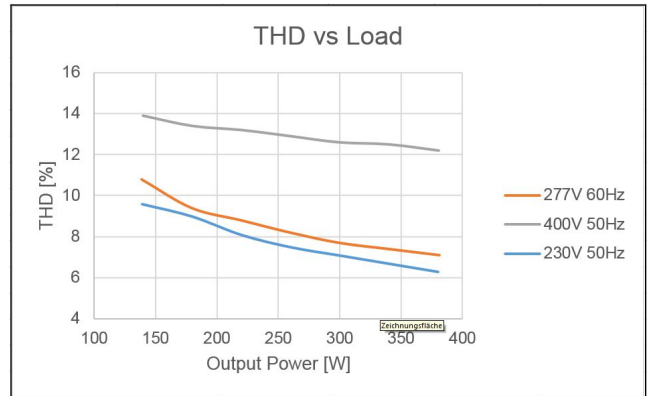

Typical Power Factor vs. Load OT FIT 380/220-400/1A4 D NFC HCL


Typical THD Vs Load OT FIT 380/220-400/1A4 D NFC HCL

## Typical Efficiency v Load 230 V 50 Hz

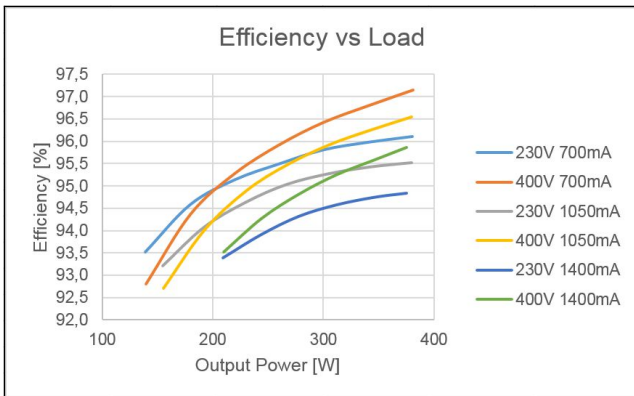

Typical Efficiency vs. Load OT FIT 380/220-400/1A4 D NFC HCL

## Dimensions & weight

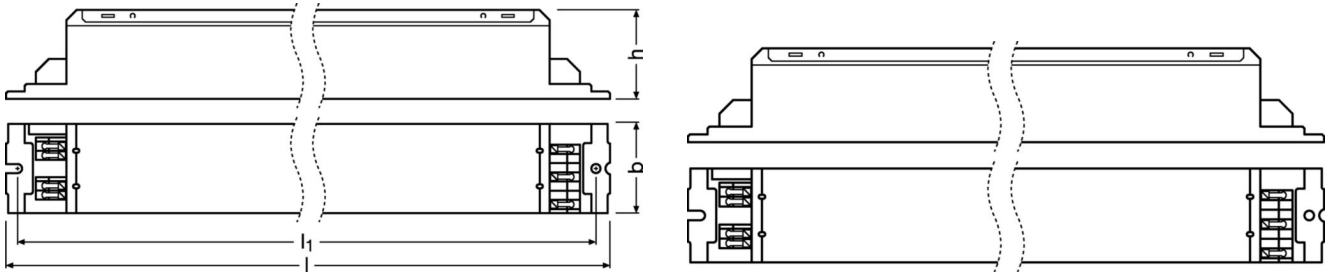

<b>Length</b>	400.0 mm
<b>Height</b>	40.0 mm
<b>Width</b>	40.0 mm
<b>Product weight</b>	645.00 g
<b>Cable cross-section, input side</b>	0.5...1.5 mm <sup>2</sup>
<b>Cable cross-section, output side</b>	0.5...1.5 mm <sup>2</sup>
<b>Wire preparation length, input side</b>	8.0...9.0 mm
<b>Wire preparation length, output side</b>	8.0...9.0 mm
<b>Mounting hole spacing, length</b>	380.0 mm

## Colors & materials

<b>Casing material</b>	Metal
------------------------	-------

## Temperatures & operating conditions

<b>Ambient temperature range</b>	-25...+70 °C
<b>Max.housing temperature in case of fault</b>	110 °C
<b>Maximum temperature at tc test point</b>	85 °C
<b>Permitted rel. humidity during operation</b>	5...85 % <sup>1)</sup>
<b>Temperature range at storage</b>	-40...+85 °C

1) Maximum 56 days/year at 85 %

## Lifespan

<b>ECG lifetime</b>	100000 h / 50000 h
---------------------	--------------------

## Capabilities

<b>Dimmable</b>	No
<b>Max. cable length to lamp/LED module</b>	2.0 m <sup>1)</sup>
<b>Overload protection</b>	Automatic reversible
<b>Overheating protection</b>	Automatic reversible
<b>Suitable for fixtures with prot. class</b>	I
<b>Type of connection, input side</b>	Push terminal
<b>Type of connection, output side</b>	Push terminal
<b>Constant lumen function</b>	Programmable
<b>Intended for no-load operation</b>	No
<b>No-load proof</b>	Yes
<b>Number of channels</b>	1
<b>Programming interface</b>	NFC
<b>Short-circuit protection</b>	Automatic reversible

1) Output wires must be routed as close as possible to each other

## Programming

<b>Box programming</b>	Yes
<b>Programming device</b>	NFC Reader
<b>Tuner4TRONIC Field App</b>	Yes

## Certificates & standards

<b>Type of protection</b>	IP20
<b>Approval marks – approval</b>	CE / VDE-ENEC / VDE-EMC / EAC / CCC / BIS / cURus
<b>Standards</b>	Acc. to IEC 61347-1 / Acc. to IEC 61347-2-13 / Acc. to IEC 62384 / Acc. to IEC 61000-3-2 / Acc. to IEC 61000-3-3 / Acc. to IEC 61547 / Acc. to CISPR 15 / UL-8750 / Acc. to FCC 47 part 15 class A

## Logistical data

<b>Commodity code</b>	85044083900
-----------------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
<b>Declaration No. in SCIP database</b>	In work
<b>Date of Declaration</b>	21-06-2024
<b>Primary Article Identifier</b>	4062172063586   4062172151221
<b>SCIP_STATUS</b>	In work
<b>SCIP_ID</b>	

## Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.



## Download Data

File		
Certificates	PDF	▶OT ENEC 40038085 230824
CAD data	Compressed	▶OT FIT 380 D NFC HC L IGS 091019
CAD data	Compressed	▶OT FIT 380 D NFC HC L STEP 091019
CAD data PDF	Compressed	▶OT FIT 380 D NFC HC L CAD2PDF 091019
CAD data PDF	Compressed	▶OT FIT 380 D NFC HC L CAD3PDF 091019
Mandatory Publications	PDF	▶OT FIT D NFC HC L CE 3790189 03 160523
Mandatory Publications	PDF	▶OT FIT D NFC HC L UK DoC 4301507 01 200923
User instruction	PDF	▶UI OT FIT 380 D NFC HC L

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172063586	OT FIT 380/220-400/1A4 D NFC HC L	Shipping carton box 10 Pieces	423 x 208 x 100 mm	8.80 dm <sup>3</sup>	663.90 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Accessories Optional

Product description	Accessory name	Accessory code
OT FIT 380/220-400/1A4 D NFC HC L	PRH101 -USB	▶ 6977078996938
OT FIT 380/220-400/1A4 D NFC HC L	CPR30 -USB	▶ 6977078996945

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.