

## ETi DALI 35/220-240/700 LT2 L

ICUTRONIC Intelligent – DALI (SELV) | Linear constant current LED driver – Dimmable



### Product family features

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Versatile scope of application due to output power range of up to 71.4 W
- Supply voltage: 220...240 V
- Available with output current range: up to 1,400 mA
- SELV driver

### Product family benefits

- Versatile SELV DALI driver up to 75 W due to flexible output characteristic
- Fully programmable via software (DALI Interface)
- Flexible current setting (RSet)
- Lifetime: up to 100,000 h (temperature at  $T_c = 65\text{ }^\circ\text{C}$ , max. 10 % failure rate)
- High-quality dimming of 10...100 % by amplitude dimming
- No TouchDIM nor Corridor Function
- High quality of light thanks to <3% output ripple current
- High efficiency
- Low standby consumption  $\leq 0.5\text{ W}$
- Fulfill safety requirement due to overload, overtemperature, Hot Plug protection

### Areas of application

- Linear and area lighting
- Linear lighting for office, education, industry, storage areas and retail
- Installation in emergency lighting systems according to IEC 61347-2-13, appendix J, except those used in high-risk task areas, i.e. those systems must not be used in workplaces where operators and other occupants of the premises are involved in potentially dangerous processes or situations.
- Suitable for luminaires of protection class I


## Technical data

### Electrical data


Device power loss	4.0 W
Nominal output voltage	20...51 V
Input voltage DC	176...276 V
Nominal output current	350...700 mA
Inrush current	≤ 10 A
Max. ECG no. on circuit breaker 10 A (B)	21
Max. ECG no. on circuit breaker 16 A (B)	35
Nominal output power	7.0...35.7 W
Input voltage AC	198...264 V
Power factor $\lambda$	0.83C...0.97
U-OUT (working voltage)	< 60 V
Surge capability (L-N)	1 kV
Surge capability (L/N-Ground)	2 kV
Mains frequency	0/50/60 Hz
Nominal input voltage	220...240 V
Total harmonic distortion	< 20 %
Output current tolerance	±7 %
Maximum output power	35.7 W
Galvanic isolation	SELV
Output ripple current (100 Hz)	< 3 %
Current set	DALI / Rset / Programmable
Networked standby power	<0.50 W <sup>1)</sup>

1) at 230 V, 50 Hz

### Typical Power Factor v Load

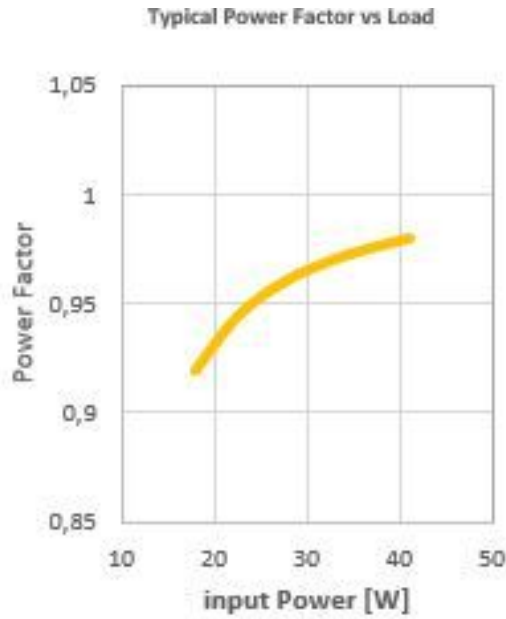


### Operating Window

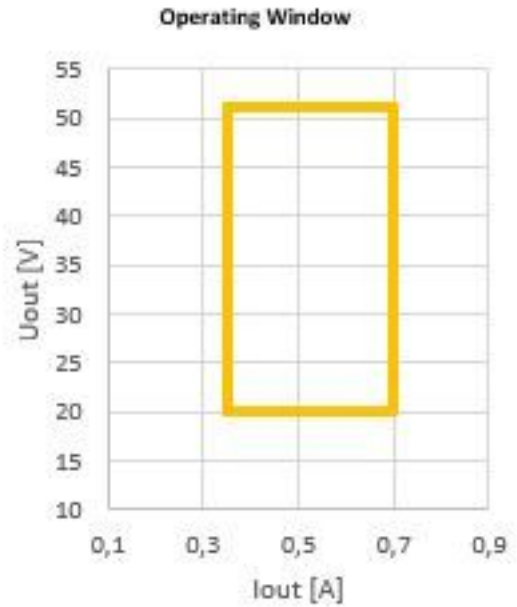


ETI DALI 35 LT2 L Typical Power Factor vs. Load

ETI DALI 35 LT2 L Operating Window

### Typical THD v Load

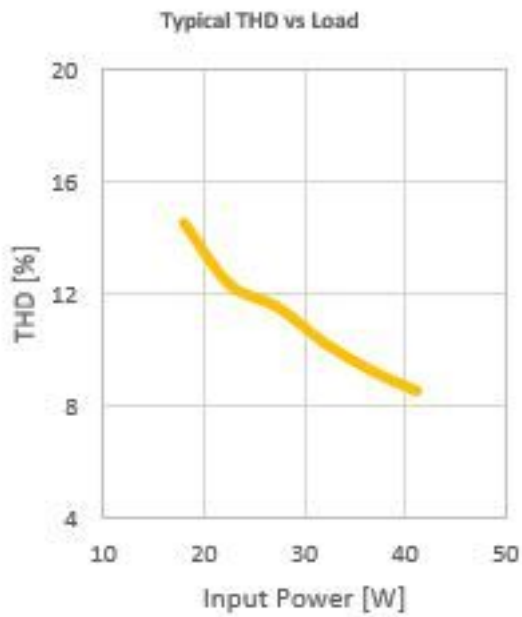


### Typical Efficiency v Load 230 V 50 Hz

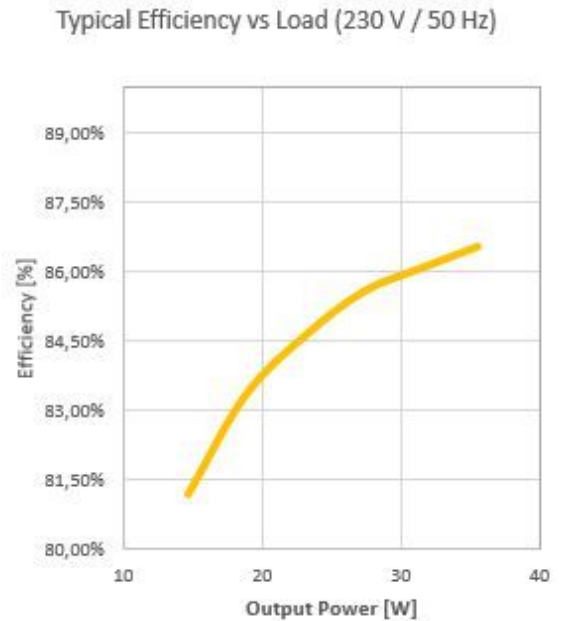

ETI DALI 35 LT2 L Typical THD Vs Load

ETI DALI 35 LT2 L Typical Efficiency vs. Load

## Dimensions & weight

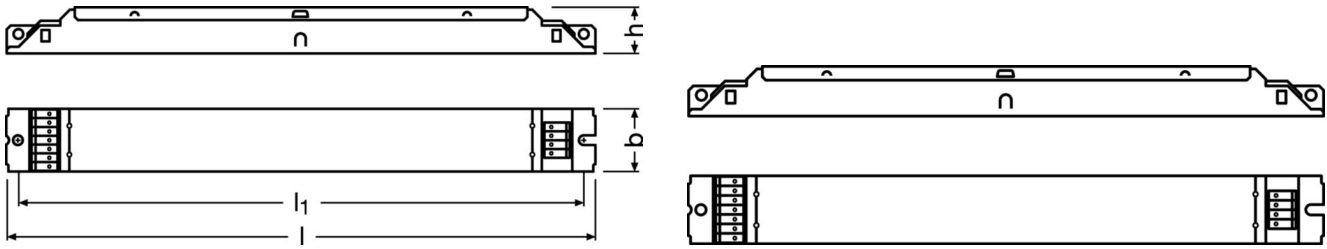

Product weight	170.00 g
Mounting hole spacing, length	270.0 mm
Wire preparation length, output side	8.0...9.0 mm
Wire preparation length, input side	8.0...9.0 mm
Cable cross-section, output side	0.5...1.5 mm <sup>2</sup>
Cable cross-section, input side	0.5...1.5 mm <sup>2</sup>
Length	280.0 mm
Height	21.0 mm

## Colors & materials

Casing material	Metal
-----------------	-------

## Temperatures & operating conditions

Max.housing temperature in case of fault	110 °C
Maximum temperature at tc test point	75 °C
Ambient temperature range	-25...+50 °C
Temperature range at storage	-40...+85 °C
Permitted rel. humidity during operation	5...85 % <sup>1)</sup>

1) Maximum 56 days/year at 85 %

## Lifespan

<b>ECG lifetime</b>	100000 h / 50000 h <sup>1)</sup>
---------------------	----------------------------------

1) At maximum  $T_c = 65^\circ\text{C}$  / 10% failure rate / At maximum  $T_c = 75^\circ\text{C}$  / 10% failure rate

## Capabilities

<b>Max. cable length to lamp/LED module</b>	2.0 m <sup>1)</sup>
<b>Dimming range</b>	10...100 %
<b>Dimming method</b>	Full analogue dimming
<b>Dimming interface</b>	DALI-2
<b>Suitable for emergency lighting</b>	Yes <sup>2)</sup>
<b>Short-circuit protection</b>	Automatic reversible
<b>Overload protection</b>	Automatic reversible
<b>Overheating protection</b>	Automatic reversible
<b>Dimmable</b>	Yes
<b>Suitable for fixtures with prot. class</b>	I
<b>No-load proof</b>	Yes
<b>Type of connection, input side</b>	Push terminal
<b>Type of connection, output side</b>	Push terminal
<b>Constant lumen function</b>	Programmable
<b>Programming interface</b>	Rset

1) Output wires must be routed as close as possible to each other

2) except those used in high-risk task areas

## Programmable features

Driver Guard	Yes
DALI Settings	Yes
Emergency Mode	Yes
DALI-2 Luminaire Data	No

## Certificates & standards

Standards	Acc. to IEC 61347-1 / Acc. to IEC 61347-2-13 / Acc. to IEC 62384 / Acc. to IEC 62386 / Acc. to IEC 61000-3-2 / Acc. to IEC 61000-3-3 / Acc. to IEC 61547
Approval marks – approval	CE / ENEC 05 / EL / EAC / CCC / BIS / RCM
Type of protection	IP20

## Logistical data

Commodity code	85044083900
----------------	-------------

## Download Data

File		
Mandatory Publications	PDF	▶ ETI DALI LT2 L CE 4235855 05 040523
Mandatory Publications	PDF	▶ ETI DALI LT2 L UK DoC 4281066 040923
User instruction	PDF	▶ UI ETI DALI LT2 L

## Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.



## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172126236	ETi DALI 35/220-240/700 LT2 L	Shipping carton box 20 Pieces	303 x 159 x 105 mm	5.06 dm <sup>3</sup>	127.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.