

## LFP2000S -G5-827-05 L1

LINEARlight FLEX Uniformity Protect | – LED modules for professional and industrial applications



### Product family features

- 24 V LED strips flexible and cuttable, 50 mm cut unit, with superior optically graded silicone encapsulation
- Available variants: 800 lm/m 1200 lm/m 2000 lm/m / CRI Ra: 95+ 90+ and 80+
- Up to 60,000 h L90/B10 with SDT technology, tested acc. to IEC 62717 on real LED strips
- Stable light flux over length: active constant current regulators (ICs), PWM safe
- Embedded automatic quick protection against accidental miswiring up to 25 V
- Fully PWM dimmable from zero up to 2.5 kHz, audible noise free, suitable for quiet places
- Excellent ESD protection of up to 8 kV in air or 4 kV in contact (acc. to IEC 61547)
- Designed, engineered and manufactured and tested in Italy (ISO9001, ISO 17025, ACCREDIA, VDE)
- Salt-mist atmosphere resistant (acc. to IEC 60068-2-52, highest severity)
- UV radiation resistant (acc. to ISO 4892-2) / Mixed flowing gas corrosion resistant (IEC 60068-2-60)

### Product family benefits

- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Light stability over time typically 1 SDCM, tested acc. to IEC 62717 @ 6,000 h
- LED lifetime acc. to IES LM-80 and IES TM-21 standards
- Reliable photometric parameters according to IES LM-79, EN13032-4 and CIE S 025
- Accurate description of the color rendition of the light source acc. to IES TM-30-15
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Vibration-resistant for stationary installations acc. to IEC60068-2-6 and IEC60068-2-64
- Flicker and stroboscopic effect-free acc. to IEC TR 61547-1 and IEC TR 63158
- Tested by accredited Product Qualification Lab. ISO9001, ISO 17025, ACCREDIA, VDE
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back



## Technical data

### Electrical data

Nominal voltage	24.0 V
Type of current	DC
Nominal wattage per meter	18.1 W
Rated wattage	90.50 W
Input voltage range	23...25 V
Accidental reverse input voltage protection up to	25 V

### Photometrical data

Color rendering index Ra	80
Luminous flux per meter	2050 lm
Luminous efficacy	113 lm/W
Light color (designation)	2700 K
Color Temperature	2700


### Light technical data

LED pitch	7.14 mm
Beam angle	120 °
Starting time	0 s
Warm-up time (60 %)	0 s

### LED module information

Number of LEDs per meter	140
Number of LEDs per smallest unit	7

## Dimensions & weight

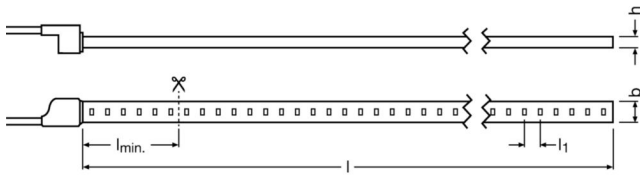

<b>Length</b>	5000 mm
<b>Length – smallest unit</b>	50.0 mm
<b>Width</b>	11.1 mm
<b>Height</b>	4.5 mm
<b>Product weight</b>	317.00 g
<b>Cable cross-section, input side</b>	0.5 mm <sup>2</sup>

## Colors & materials

<b>Cover material</b>	Silicone
-----------------------	----------

## Temperatures & operating conditions

<b>Temperature range in operation at Tc point</b>	-30...80 °C <sup>1)</sup>
<b>Ambient temperature range</b>	-30...+50 °C
<b>Temperature range at storage</b>	-40...+85 °C

1) Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

## Lifespan

Rated lamp life time	60000 h
Number of switching cycles	>15000

## Additional product data

ID of contained light source	LS_TRV_285991
------------------------------	---------------

## Capabilities

Lowest bending radius	50 mm
Self-adhesive	Yes
With connection set	No
Lowest bending radius	50 mm

## Certificates & standards

<b>Standards</b>	CE / UL / ENEC / EAC
<b>Type of protection</b>	IP68
<b>Energy efficiency class of the contained light source</b>	F

## Logistical data

<b>Commodity code</b>	85395100000
-----------------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
<b>Date of Declaration</b>	31-03-2026
<b>Primary Article Identifier</b>	4062172304238   6937186130181
<b>Declaration No. in SCIP database</b>	In work
<b>SCIP_STATUS</b>	In work
<b>SCIP_ID</b>	

## Equipment / Accessories

- Flexessories: a complete set of aluminum channels with diffusers and lenses
- Connectors: quick-and-easy toolless installation with SLIMCONNECTsystem G2
- Drivers and dimmers: wide selection of OPTOTRONIC 24 V DALI, DMX and BLE
- Check for more detailed information the specification sheets in the download section

## Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Download Data

File		
IES data	Compressed	▶ LFP2000S-G5-827-05 C_IES
Product Datasheet	PDF	▶ LINEARlight FLEX UNIFORMITY_Specification Sheet_IP66 - 24V
Eulumdat	Compressed	▶ LFP2000S-G5-827-05 C_Idt
User instruction	PDF	▶ LINEARlight FLEX Protect Uniformity LFP800S-G5 LFP1200S-G5 LFP2000S-G5

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
6937186130181 INVENTRONICS	LFP2000S -G5-827-05 L1	Shipping carton box 8 Pieces	365 x 286 x 366 mm	38.21 dm <sup>3</sup>	846.25 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## Accessories Optional

Product description	Accessory name	Accessory code
LFP2000S -G5-827-05 L1	FX-QMS-G1 -TU15H6W3-300	▶ 6937186126702
LFP2000S -G5-827-05 L1	FX-QMS-G2 -TU16H12-300	▶ 6937186126740
LFP2000S -G5-827-05 L1	FX-QMW-G2 -TU26H25W10-200	▶ 6937186126801
LFP2000S -G5-827-05 L1	FX-QMW-G2 -TU26H25-200 WH KIT5	▶ 6937186126825
LFP2000S -G5-827-05 L1	FX-QMW-G2 -TU26H10-200 WS	▶ 6937186126849
LFP2000S -G5-827-05 L1	FX-QMS-G2 -TU15H6-300	▶ 6937186130860
LFP2000S -G5-827-05 L1	Corner surface wide profile 46x27 mm	▶ 6937186131706
LFP2000S -G5-827-05 L1	ENDCAP -IP67 KIT 10PCS	▶ 6937186131850
LFP2000S -G5-827-05 L1	CONN-FLEX -IP67-2P KIT 5PCS	▶ 6937186140449
LFP2000S -G5-827-05 L1	JUMPER -FLEX-IP67-2P KIT 5PCS	▶ 6937186141040
LFP2000S -G5-827-05 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 6937186141200
LFP2000S -G5-827-05 L1	CONN-FLEX -IP67-2P-300 KIT 5PCS	▶ 6937186141224
LFP2000S -G5-827-05 L1	FX-QMS-G1 -TU16H12W3-300	▶ 6937186146229
LFP2000S -G5-827-05 L1	LF-CLIP -FIXTURE PROTECT	▶ 6937186148360
LFP2000S -G5-827-05 L1	FX-QMW-G1 -TK30D46H27-300	▶ 6937186148407
LFP2000S -G5-827-05 L1	FX-QMS-G1 -TU16H12LS-300	▶ 6937186148421
LFP2000S -G5-827-05 L1	Pendant wide profile 56x70 mm	▶ 6977078997805
LFP2000S -G5-827-05 L1	Pendant wide profile 56x70 mm	▶ 6977078997836
LFP2000S -G5-827-05 L1	Pendant wide profile 56x70 mm	▶ 6977078997867
LFP2000S -G5-827-05 L1	Pendant wide profile 56x70 mm	▶ 6977078997898
LFP2000S -G5-827-05 L1	Pendant wide profile 56x70 mm	▶ 6977078997928
LFP2000S -G5-827-05 L1	Pendant wide profile 56x70 mm	▶ 6977078997959
LFP2000S -G5-827-05 L1	null	▶ 6977078998017
LFP2000S -G5-827-05 L1	null	▶ 6977078998048
LFP2000S -G5-827-05 L1	null	▶ 6977078998079
LFP2000S -G5-827-05 L1	null	▶ 6977078998109
LFP2000S -G5-827-05 L1	null	▶ 6977078998130
LFP2000S -G5-827-05 L1	null	▶ 6977078998161
LFP2000S -G5-827-05 L1	LF-CLIP -FIXTURE PROTECT	▶ 4008321644749
LFP2000S -G5-827-05 L1	LF-CLIP -FIXTURE PROTECT	▶ 6937186148360
LFP2000S -G5-827-05 L1	FX-QMW-G1 -TU26H10-300	▶ 4062172114165