

LTS-ENDCAP -OPAL-S KIT 20 PCS

Minimal surface slim profile 15x10mm | external cover | Accessories for Flexible LED strips



Product family features

- Can be easily combined with covers for homogeneous light distribution
- Clips for easy installation and maintenance
- Compatible with Linearlight Flex
- Ideal even for lighting in confined spaces
- Compatible with TEC Flex

Product family benefits


- Plenty of freedom for attractive design and perfect functioning
- Quick and easy installation
- Aluminum profile robust and corrosion-resistant thanks to anodization
- Minimum installation dimensions thanks to compact design

Areas of application

- Architectural Integration – e.g. coves, walls
- Ceiling integration
- Recessed lighting
- Cove lighting
- Shelf and furniture lighting

Technical data

Dimensions & weight

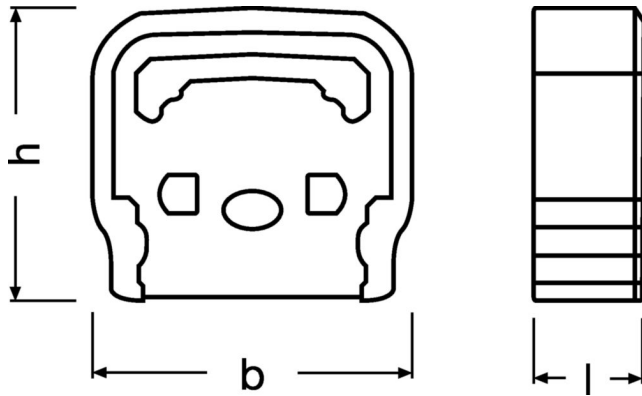

Length	7 mm
Width	20.0 mm
Height	18.0 mm
Product weight	22.00 g

Logistical data

Commodity code	39269097900
Box composition	20
Applicable region	APAC (excl. China, India, Japan) / CHINA / EUROPE / INDIA / MEA / NAFTA / SOUTH AMERICA

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	01-09-2026
Primary Article Identifier	4062172212137 6937186148780
Declaration No. in SCIP database	In work
SCIP_STATUS	In work
SCIP_ID	

Download Data

File		
CAD data 3-dim	Compressed	▶ LTS-ENDCAP-OPAL-S 3D CAD
CAD data	UNKNOWN	▶ LTS-ENDCAP-OPAL-S STEP

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
6937186148780 INVENTRONICS	LTS-ENDCAP -OPAL-S KIT 20 PCS	Shipping carton box 10 Pieces	135 x 103 x 80 mm	1.11 dm ³	32.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.