

## OT FIT 150/220-240/24 PC

Optotronic - 24 V Phase Cut



### Product family features

- 24 V constant output voltage
- SELV
- Wide Ta range -20 – +50 °C
- Lifetime 50 000 h at tc max
- Dimming range: 3...100 % luminous flux
- Recommended to Use Trailing Edge dimmer

### Product family benefits

- IP rating: IP20
- High efficiency
- Very stable output power
- High electrical reversible short-circuit, overload, overtemperature protection
- Independent installation possible

## Areas of application

- Suitable for luminaires of protection classes I and II
- Hospitality – decorative lighting, night light
- Restaurants – decorative lighting
- Shops – decorative lighting, shelf lighting
- Residential – cove lighting, under cabinet lighting

## Technical data

### Electrical data

Nominal input voltage	220...240 V
Mains frequency	50/60 Hz
Input voltage AC	198...264 V
Nominal input current at 230 V	0.80 A
Total harmonic distortion	< 15 %
Power factor $\lambda$	0.95...0.98 <sup>1)</sup>
Efficiency in full-load	92 % <sup>2)</sup>
Device power loss	13 W <sup>3)</sup>
Inrush current	< 60 A <sup>4)</sup>
Max. ECG no. on circuit breaker 10 A (B)	2
Max. ECG no. on circuit breaker 16 A (B)	4
Surge capability (L/N-Ground)	2 kV
Surge capability (L-N)	1 kV
Nominal output voltage	24.2 V
Output ripple current (100 Hz)	5 %
Output PSTLM	<1
Output SVM	<0.4
Nominal output power	60.5...150 W
Maximum output power	150 W <sup>5)</sup>
Galvanic isolation	SELV

1) at nominal power range, 230V/50 Hz


2) at 230 V, 50 Hz

3) At Full load, 230 V, 50 Hz


4)  $t_{width} = 250 \mu s$  (measured at 50 %  $I_{peak}$ )

5) at steady state

## Typical Power Factor v Load

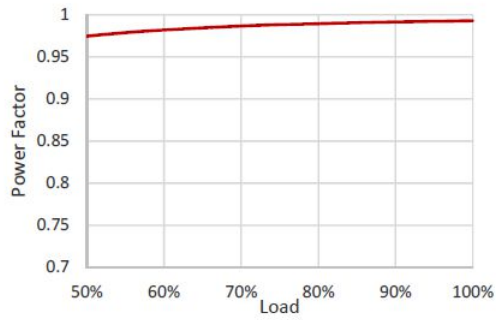


## Typical THD v Load

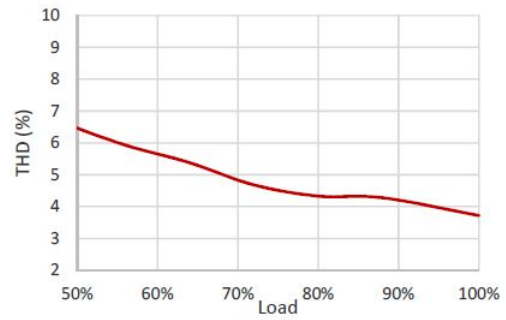

OT FIT 150 220-240 24 PC Typical Power Factor vs. Load


OT FIT 150 220-240 24 PC Typical THD vs Load

## Typical Efficiency v Load 230 V 50 Hz

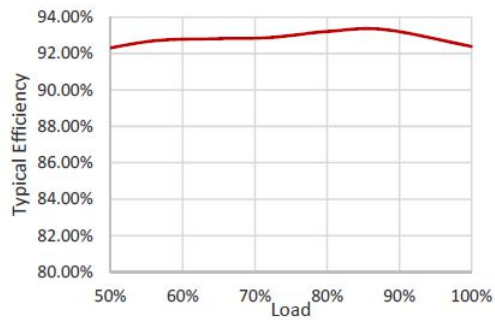

OT FIT 150 220-240 24 PC Typical Efficiency vs. Load

## Dimensions & weight

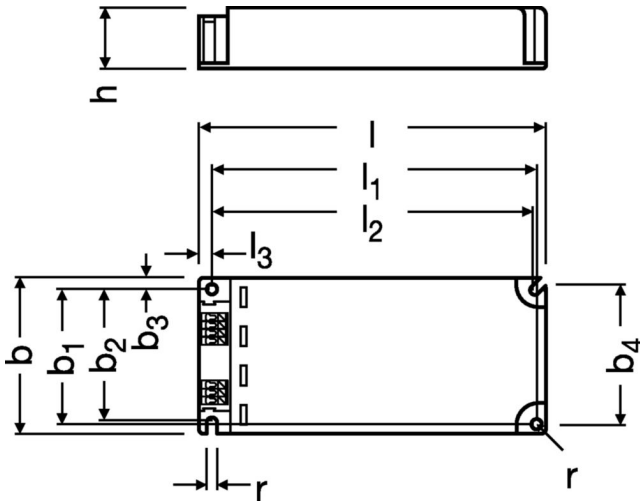

Length	170.0 mm
Width	76.0 mm
Height	30.0 mm
Mounting hole spacing, length	159.5 mm
Mounting hole spacing, width	66.0 mm
Cable cross-section, input side	0.75...1.5 mm <sup>2</sup> <sup>1)</sup>
Cable cross-section, output side	0.75...1.5 mm <sup>2</sup>
Wire preparation length, input side	7...8 mm
Wire preparation length, output side	7...8 mm
Product weight	580.00 g

1) Use heat resistant supply cables, interconnecting cables or external wiring, having  $t \geq 105$  °C

## Colors & materials

Casing material	Plastic
-----------------	---------

## Temperatures & operating conditions

Ambient temperature range	-20...+45 °C
Maximum temperature at tc test point	80 °C
Max.housing temperature in case of fault	110 °C
Temperature range at storage	-20...80 °C
Permitted rel. humidity during operation	5...85 % <sup>1)</sup>

1) Maximum 56 days/year at 85 %

## Lifespan

<b>ECG lifetime</b>	50000 h
---------------------	---------

## Capabilities

<b>Dimmable</b>	Yes
<b>Dimming interface</b>	Phase Cut
<b>Dimming range</b>	3...100 %
<b>Dimming method</b>	PWM
<b>Max. cable length to lamp/LED module</b>	10 m <sup>1)</sup>
<b>Suitable for fixtures with prot. class</b>	I
<b>Type of connection, input side</b>	Terminal
<b>Type of connection, output side</b>	Terminal
<b>Number of channels</b>	1
<b>Overheating protection</b>	Yes
<b>Overload protection</b>	Yes
<b>Short-circuit protection</b>	Yes
<b>Intended for no-load operation</b>	No
<b>No-load proof</b>	Yes

1) Output wires must be routed as close as possible to each other

## Programming

Tuner4TRONIC	No
--------------	----

## Certificates & standards

Approval marks – approval	CE / ENEC / CCC / RCM / UKCA / EAC / SELV / CB
Standards	EN 61347-1 / EN 61347-2-13 / EN 55015 / EN 61547 / EN 60598-1 / EN 62384 / CISPR 15/EN 55015
Type of protection	IP20

## Logistical data

Commodity code	85044083900
----------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	02-04-2026
Primary Article Identifier	4062172237642   6977770438569
Declaration No. in SCIP database	In work
SCIP_STATUS	In work
SCIP_ID	

## Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

---

## Download Data

File		
Product Datasheet	PDF	▶ OT FIT 150 PC 6977770438569 TDS 310326
User instruction	PDF	▶ G15130049 UI_OT FIT 36_75_150_24 PC_8p_INV v2

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
6977770438569 INVENTRONICS	OT FIT 150/220-240/24 PC	Shipping carton box 10 Pieces	400 x 187 x 99 mm	7.41 dm <sup>3</sup>	614.20 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## Accessories Optional

Product description	Accessory name	Accessory code
OT FIT 150/220-240/24 PC	OT CABLE CLAMP B-STYLE	▶ 4052899077881
OT FIT 150/220-240/24 PC	OT CABLE CLAMP B-STYLE	▶ 6977770432147