

EM FIT 18/220-240/350 CS L (NEW)

ELEMENT EM FIT SELV | Linear / Area Constant Current – Non dimmable



Product family features

- Line frequency: 50 Hz | 60 Hz
- Supply voltage: 220...240 V
- Lifetime: up to 50,000 h (temperature at T_c max. = -10 °C, max 10% failure rate)
- SELV driver
- Wide output voltage range
- Fixed output (no dimming)

Product family benefits

- Small housing design
- Flexible current setting (DIPswitch – 4 currents)
- Enhanced safety due to overload, overtemperature, short-circuit protection
- High efficiency
- Long lasting and high reliability
- High light quality due to low ripple current

Areas of application

- Linear and area lighting
- Shop lighting
- Industry lighting
- Offices, Public buildings, Supermarkets
- Suitable for luminaires of protection class I and II

Technical data

Electrical data

Nominal input voltage	220...240 V
Nominal output current	200 mA / 250 mA / 300 mA / 350 mA ¹⁾
Nominal output power	5.4...17.85 W
Nominal output voltage	27...51 V ²⁾
Maximum output power	17.8 W
Mains frequency	50/60 Hz
Input voltage AC	198...264 V
Device power loss	3.4 W ³⁾
Efficiency in full-load	84 % ⁴⁾
Inrush current	35 A ⁵⁾
Max. ECG no. on circuit breaker 10 A (B)	30
Max. ECG no. on circuit breaker 16 A (B)	48
Max. ECG no. on circuit breaker 25 A (B)	75
Output current tolerance	±7.5 %
Output PSTLM	≤1
Output ripple current (100 Hz)	< 10 % ⁶⁾
Output SVM	≤0.4
Power factor λ	0.95 ⁷⁾
Surge capability (L-N)	1 kV
Surge capability (L/N-Ground)	2 kV ⁸⁾
Total harmonic distortion	< 20 % ⁹⁾
U-OUT (working voltage)	< 60 V
Current set	DipSwitch

1) ±7.5%

2) At 200/250 mA output current / At 300/350 mA output current

3) At 230 V

4) at 230 V, 50 Hz

5) $t_{width} = 80 \mu s$ typical (measured at 50 % I_{peak})


6) Ripple average at 100 Hz

7) Full load at 230 V / 50 Hz


8) L/N – PE acc to EN 61547 Clause 5.7

9) At full load, 230 V, 50 Hz / see graphs

Typical Power Factor v Load

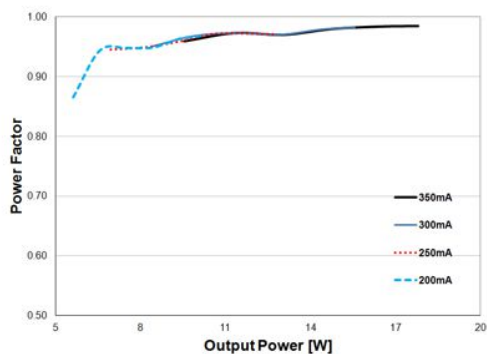


Operating Window

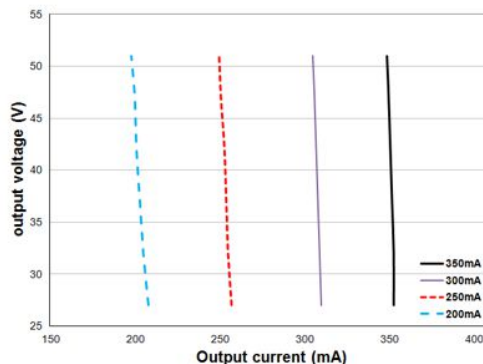


EM FIT 18 220-240 350 CS L Typical Power Factor vs. Load

EM FIT 18 220-240 350 CS L Operating Window

Typical THD v Load

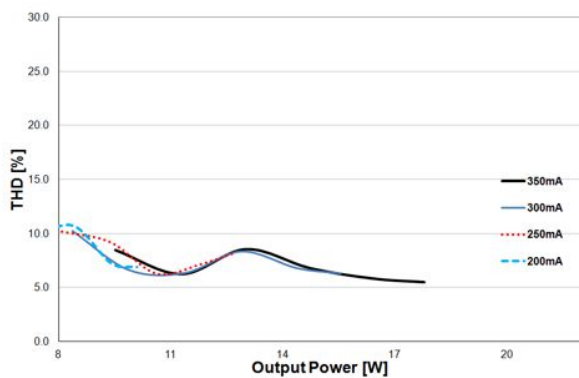


Typical Efficiency v Load 230 V 50 Hz

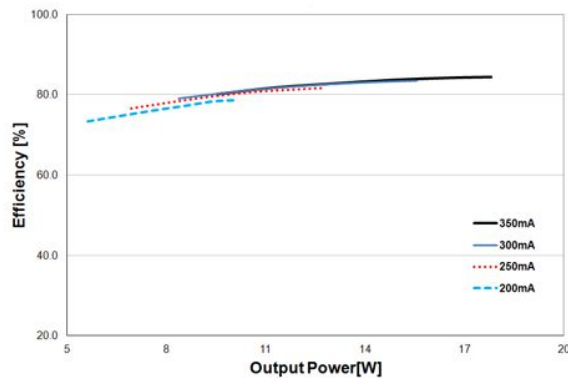

EM FIT 18 220-240 350 CS L Typical THD vs Load

EM FIT 18 220-240 350 CS L Typical Efficiency vs. Load

Dimensions & weight

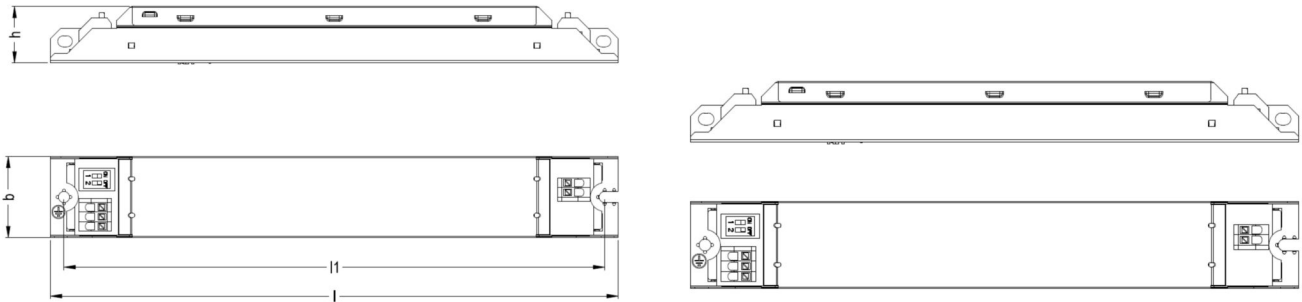

Length	210.0 mm
Height	21.0 mm
Width	30.0 mm
Product weight	140.00 g
Cable cross-section, input side	0.5...1.5 mm ² / 0.75...1.5 mm ² ¹⁾
Cable cross-section, output side	0.5...1.5 mm ² / 0.75...1.5 mm ² ¹⁾
Wire preparation length, input side	7...8 mm
Wire preparation length, output side	7...8 mm
Mounting hole spacing, length	200.0 mm

1) Solid or flexible leads

Colors & materials

Casing material	Metal
------------------------	-------

Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Max.housing temperature in case of fault	110 °C
Maximum temperature at tc test point	65 °C
Permitted rel. humidity during operation	5...90 % ¹⁾
Temperature range at storage	-40...+85 °C

1) Non-condensing

Lifespan

ECG lifetime	35000 h / 50000 h ¹⁾
---------------------	---------------------------------

1) At maximum $T_c = 65^\circ\text{C}$ / 10% failure rate / At maximum $T_c = 60^\circ\text{C}$ / 10% failure rate

Additional product data

Encapsulated	No
---------------------	----

Capabilities

Dimmable	No
Max. cable length to lamp/LED module	2.0 m ¹⁾
Overload protection	Automatic reversible
Overheating protection	Automatic reversible
Suitable for fixtures with prot. class	I
Type of connection, input side	Terminal
Type of connection, output side	Terminal
Constant lumen function	No
Intended for no-load operation	No
No-load proof	Yes
Number of channels	1
Programming interface	Dipswitch
Short-circuit protection	Automatic reversible

1) Output wires must be routed as close as possible to each other

Programming

Box programming	No
Programming device	DIPswitch
Tuner4TRONIC	No
Tuner4TRONIC Field App	No

Certificates & standards

Type of protection	IP20
Approval marks – approval	CE / CCC / EAC / ENEC / RCM / UKCA
Standards	Acc. to IEC 61347-1 / Acc. to IEC 61347-2-13 / Acc. to IEC 62384 / Acc. to IEC 61000-3-2 / Acc. to IEC 61547 / CISPR 15/EN 55015

Logistical data

Commodity code	85044083900
----------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Declaration No. in SCIP database	In work
Date of Declaration	17-06-2024
Primary Article Identifier	4062172219976
SCIP_STATUS	In work
SCIP_ID	

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Download Data

File		
Certificates	PDF	▶ OT constant current EAC DE PA01 B 34987 21 071221
Certificates	PDF	▶ EM FIT D CS L & CS L ENEC 35 122751 03 200524
Certificates	PDF	▶ EM FIT CS L NSW 27964 2
Mandatory Publications	PDF	▶ EM FIT CS L CE 4332115 04 080823
Mandatory Publications	PDF	▶ EM FIT CS L UK DoC 4332152 02 220923
User instruction	PDF	▶ ELEMENT LED Power Supply

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172219976	EM FIT 18/220-240/350 CS L	Shipping carton box 20 Pieces	375 x 250 x 75 mm	7.03 dm ³	161.70 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.