

## IT FIT 60/220-240/1A4 CS

ICUTRONIC FIT CS (sq) | Compact constant current LED driver – Non dimmable



### Product family features

- Lifetime: up to 50,000 h (temperature at max.  $t_c$ )
- Cable clamp kit for independent mounting

### Product family benefits

- Higher quality of light thanks to low output ripple current
- High flexibility due to four different output currents
- Small housing for flexible luminaire designs
- High efficiency

## Areas of application

- Suitable for downlights, spotlights and LED panels
- Suitable for luminaires of protection classes I and II

## Technical data

### Electrical data

Nominal input voltage	220...240 V
Mains frequency	50/60 Hz
Input voltage AC	198...264 V <sup>1)</sup>
Input voltage DC	not relevant
Nominal input current at 230 V	0.32 A
Total harmonic distortion	< 10 %
Power factor $\lambda$	0.90C...0.98 <sup>2)</sup>
Efficiency in full-load	90 % <sup>3)</sup>
Device power loss	6.5 W
Networked standby power	not relevant
Inrush current	< 50 A <sup>4)</sup>
Max. ECG no. on circuit breaker 10 A (B)	11
Max. ECG no. on circuit breaker 16 A (B)	18
Max. ECG no. on circuit breaker 25 A (B)	not relevant
Surge capability (L-N)	1 kV
Surge capability (L/N-Ground)	2 kV
Protective conductor current	<0.7 mA
Nominal output voltage	27...57 V / 27...52 V / 27...48 V / 27...43 V / 27...40 V <sup>5)</sup>
U-OUT (working voltage)	60 V
Nominal output current	825 mA / 900 mA / 975 mA / 1050 mA / 1000 mA / 1200 mA / 1300 mA / 1400 mA
Default output current	1400 mA
Output current tolerance	±5 %
Output ripple current (100 Hz)	< 3 % <sup>6)</sup>
Output PSTLM	≤1
Output SVM	≤0.4
Nominal output power	22.3...60 W
Maximum output power	60 W
Galvanic isolation primary/secondary	SELV

1) Safety voltage range

2) Full load at 230 V / 50 Hz


3) at 230 V, 50 Hz

4)  $t_{width} = 70 \mu s$  (measured at 50 %  $I_{peak}$ )

5) At 825/900/975/1050 mA / At 1100 mA / At 1200 mA / At 1300 mA / At 1400 mA

6) Ripple / average @ 100 Hz

## Dimensions & weight

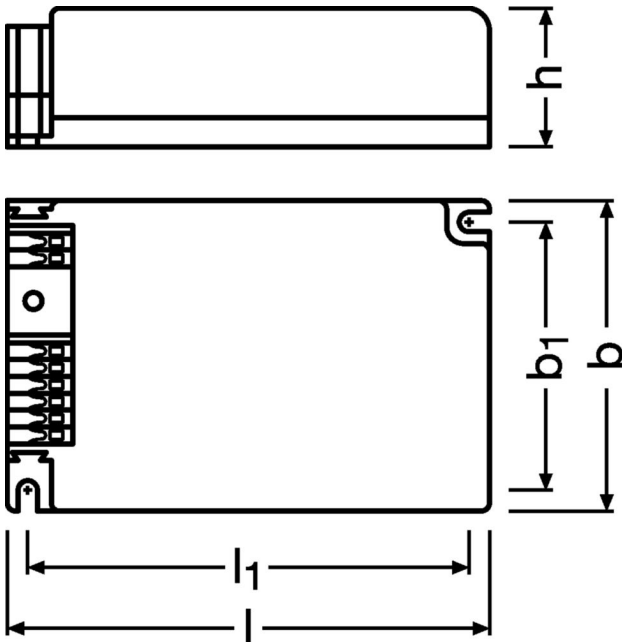

Product weight	155.00 g
Length	103.0 mm
Width	67.0 mm
Height	29.5 mm
Mounting hole spacing, length	94.0 mm
Mounting hole spacing, width	58.0 mm
Cable cross-section, input side	0.5...1.5 mm <sup>2</sup> / 0.75...1.5 mm <sup>2</sup> <sup>1)</sup>
Cable cross-section, output side	0.5...1.5 mm <sup>2</sup> / 0.75...1.5 mm <sup>2</sup> <sup>1)</sup>
Wire preparation length, input side	7...8 mm
Wire preparation length, output side	7...8 mm
Cable/wire length, output side	2000 mm

1) Solid/ Flexible Leads

## Colors & materials

Casing material	Plastic
Product color	White

## Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Maximum temperature at tc test point	80 °C <sup>1)</sup>
Max.housing temperature in case of fault	110 °C
Temperature range at storage	-40...+85 °C
Permitted rel. humidity during operation	5...85 % <sup>2)</sup>

1) Measured on tc point indicated of the product label.

2) Maximum 56 days/year at 85 %

## Lifespan

<b>ECG lifetime</b>	50000 h <sup>1)</sup>
---------------------	-----------------------

1) At maximum  $T_c = 80^\circ\text{C}$  / 10% failure rate

## Additional product data

<b>Encapsulated</b>	No
---------------------	----

## Capabilities

<b>Programming interface</b>	Dipswitch
<b>Dimmable</b>	No
<b>Max. cable length to lamp/LED module</b>	2.0 m <sup>1)</sup>
<b>Suitable for fixtures with prot. class</b>	I / II
<b>Type of connection, input side</b>	Push terminal
<b>Type of connection, output side</b>	Push terminal
<b>Suitable for through-wiring</b>	Yes with optional cable clamp
<b>Number of channels</b>	1
<b>Overheating protection</b>	Automatic switch off, reversible
<b>Overload protection</b>	Automatic reversible
<b>Short-circuit protection</b>	Automatic reversible
<b>Intended for no-load operation</b>	No
<b>No-load proof</b>	Yes

1) Output wires must be routed as close as possible to each other

## Programming

Programming device	DIPswitch
Tuner4TRONIC	not relevant
Tuner4TRONIC Field App	not relevant
Box programming	not relevant

## Certificates & standards

Approval marks – approval	ENEC 05 / CCC / RCM / CE
Standards	IEC 61347-1 / IEC 61347-2-13 / IEC 62384 / CISPR 15 / IEC 61000-3-2 / IEC 61000-3-3 / IEC 61547
Type of protection	IP20

## Logistical data

Commodity code	85044083900
----------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	31-03-2026
Primary Article Identifier	4062172306072   6977770437449
Declaration No. in SCIP database	In work
SCIP_STATUS	In work
SCIP_ID	

## Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

---

## Download Data

File		
CAD data	Compressed	▶ OT FIT 75 1A6 CS STEP 220319
User instruction	PDF	▶ UI IT FIT 60 CS

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
6977770437449 INVENTRONICS	IT FIT 60/220-240/1A4 CS	Shipping carton box 20 Pieces	353 x 223 x 95 mm	7.48 dm <sup>3</sup>	170.50 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## Accessories Optional

Product description	Accessory name	Accessory code
IT FIT 60/220-240/1A4 CS	OT CABLE CLAMP B-STYLE	▶ 4052899077881
IT FIT 60/220-240/1A4 CS	OT CABLE CLAMP B-STYLE	▶ 6977770432147
IT FIT 60/220-240/1A4 CS	OT CABLE CLAMP B-STYLE TL	▶ 4052899948051
IT FIT 60/220-240/1A4 CS	OT CABLE CLAMP B-STYLE TL	▶ 6977770432161