


## LF500I-G1 -927-24-09 L1 FS1

LINEARlight FLEX Infinite IP00 | – LED modules for professional and industrial applications

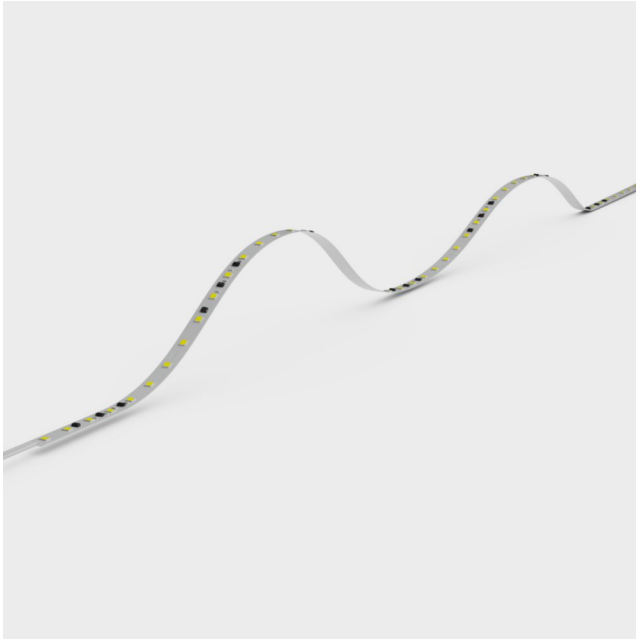

### Product family features

- Flexible and cuttable LED strip
- Luminous flux: up to 4,000 lm/m
- Dimmable with PWM technology

### Product family benefits

- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- High color fidelity to beautify every design
- High luminous flux
- Large selection of light colors
- Great design freedom thanks to flexibility and cuttability of module
- High-performance silicone for extremely long life and flexibility
- Extraordinary design and high quality materials
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Pre-wired LED strip, simple and quick plug-and-play installation
- Outdoor use possible: UV and salt mist resistant (UV acc. to ISO 4892-2 - Method A, salt mist acc. to IEC 60068-2-52 severity 1)



## Technical data

### Electrical data

Nominal voltage	24.0 V
Type of current	DC
Nominal wattage per foot	1.2 W
Rated wattage	36.00 W
Input voltage range	23...25 V
Accidental reverse input voltage protection up to	25 V

### Photometrical data

Color rendering index Ra	90
Luminous flux per ft US	149.4 lm
Luminous efficacy	122.5 lm/W
Light color (designation)	2700 K
Color Temperature	2700


### Light technical data

LED pitch [PIM] US	0.49 in
Beam angle	120 °
Starting time	< 0.5 s

### LED module information

Number of LEDs per foot	24
Number of LEDs per smallest unit	4

## Dimensions & weight

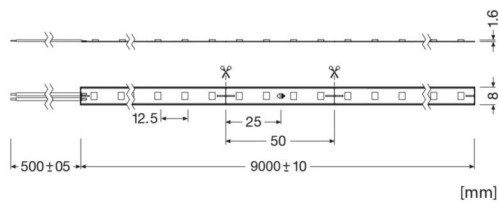

<b>Length US</b>	354.3 in
<b>Length – smallest unit US</b>	1.97 in
<b>Width US</b>	0.31 in
<b>Height US</b>	0.06 in
<b>Product weight US</b>	3.70 oz
<b>Cable cross-section, input side US</b>	0.00077500155 in <sup>2</sup>

## Temperatures & operating conditions

<b>Temperature range in operation at Tc point US</b>	-22...+185 °F <sup>1)</sup>
<b>Ambient temperature range US</b>	-22...+131 °F
<b>Temperature range at storage US</b>	-40...+185 °F

1) Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

## Lifespan

Rated lamp life time	60000 h
Number of switching cycles	>30000

## Capabilities

Lowest bending radius US	0.79 in
Self-adhesive	Yes
With connection set	No

## Certificates & standards

<b>Standards</b>	CE / UKCA / ENEC / VDE / SASO 2927:2019 / UL
<b>Type of protection</b>	IP00

## Logistical data

<b>Commodity code</b>	85395100000
-----------------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
<b>Date of Declaration</b>	12-06-2026
<b>Primary Article Identifier</b>	4062172371025   6937186116635
<b>Declaration No. in SCIP database</b>	In work
<b>SCIP_STATUS</b>	In work
<b>SCIP_ID</b>	

## Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem
- Quick installation with optional SLIM TRACK System
- Perfectly matched to non-isolated OPTOTRONIC® electronic control gears

## Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Download Data

File		
IES data	Compressed	▶ LF500I-G1-927-24 IES 100325
Product Datasheet	PDF	▶ LINEARlight FLEX INFINITE_Specification Sheet_IP00 - 24V
Product Datasheet	PDF	▶ LINEARlight FLEX INFINITE_Specification Sheet_IP00_24V [imperial units] 140526
Certificates	PDF	▶ CED_I E10 FLEX Infinite Brand Inventronics
Eulumdat	Compressed	▶ LF500I-G1-927-24 LDT 100325
Mandatory Publications	PDF	▶ Infinite CE 4507671 070525
User instruction	PDF	▶ LINEARlight FLEX Infinite

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
6937186116635 INVENTRONICS	LF500I-G1 -927-24-09 L1 FS1	Shipping carton box 8 Pieces	9.49 x 7.68 x 8.07 in	0.34 ft <sup>3</sup>	7.82 oz

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## Accessories Optional

Product description	Accessory name	Accessory code
LF500I-G1 -927-24-09 L1 FS1	FX-QMS-G1 -TU15H6W3-300	▶ 6937186126702
LF500I-G1 -927-24-09 L1 FS1	FX-QMS-G2 -TU16H12-300	▶ 6937186126740
LF500I-G1 -927-24-09 L1 FS1	FX-QMW-G2 -TU26H25W10-200	▶ 6937186126801
LF500I-G1 -927-24-09 L1 FS1	FX-QMW-G2 -TU26H25-200 WH KIT5	▶ 6937186126825
LF500I-G1 -927-24-09 L1 FS1	FX-QMW-G2 -TU26H10-200 WS	▶ 6937186126849
LF500I-G1 -927-24-09 L1 FS1	FX-QMS-G2 -TU15H6-300	▶ 6937186130860
LF500I-G1 -927-24-09 L1 FS1	Corner surface wide profile 46x27 mm	▶ 6937186131706
LF500I-G1 -927-24-09 L1 FS1	CONN-FLEX -2P-050 KIT 10PCS	▶ 6937186141088
LF500I-G1 -927-24-09 L1 FS1	CONN-FLEX -2P-200 KIT 10PCS	▶ 6937186141101
LF500I-G1 -927-24-09 L1 FS1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 6937186141200
LF500I-G1 -927-24-09 L1 FS1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 6937186141262
LF500I-G1 -927-24-09 L1 FS1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 6937186141286
LF500I-G1 -927-24-09 L1 FS1	FX-QMS-G1 -TU16H12W3-300	▶ 6937186146229
LF500I-G1 -927-24-09 L1 FS1	FX-QMW-G1 -TK30D46H27-300	▶ 6937186148407
LF500I-G1 -927-24-09 L1 FS1	FX-QMS-G1 -TU16H12LS-300	▶ 6937186148421
LF500I-G1 -927-24-09 L1 FS1	Pendant wide profile 56x70 mm	▶ 6977078997805
LF500I-G1 -927-24-09 L1 FS1	Pendant wide profile 56x70 mm	▶ 6977078997836
LF500I-G1 -927-24-09 L1 FS1	Pendant wide profile 56x70 mm	▶ 6977078997867
LF500I-G1 -927-24-09 L1 FS1	Pendant wide profile 56x70 mm	▶ 6977078997898
LF500I-G1 -927-24-09 L1 FS1	Pendant wide profile 56x70 mm	▶ 6977078997928
LF500I-G1 -927-24-09 L1 FS1	Pendant wide profile 56x70 mm	▶ 6977078997959
LF500I-G1 -927-24-09 L1 FS1	null	▶ 6977078998017
LF500I-G1 -927-24-09 L1 FS1	null	▶ 6977078998048
LF500I-G1 -927-24-09 L1 FS1	null	▶ 6977078998079
LF500I-G1 -927-24-09 L1 FS1	null	▶ 6977078998109
LF500I-G1 -927-24-09 L1 FS1	null	▶ 6977078998130
LF500I-G1 -927-24-09 L1 FS1	null	▶ 6977078998161