

## ELEMENT 15/220-240/350 (NEW)

ELEMENT G4 | Compact constant current LED driver – Non dimmable




### Product family features

- Supply voltage: 220...240 V
- Fixed output (no dimming)
- Line frequency: 50 Hz | 60 Hz
- Line voltage: 198...264 V
- According to EN 61347-1, 61347-2-13, 62384
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547
- SELV

### Product family benefits

- Versatile scope of application due to output power range of up to 42 W
- Safety ensured by OSRAM (SELV)
- Higher quality of light thanks to < 5% output ripple current
- High efficiency
- High compatibility with COBs and discrete LEDs



## Areas of application

- Spot light and down light
- Panels
- Other Indoor LED luminaries
- Suitable for downlights, spotlights and LED panels
- Suitable for indoor SELV installations

## Technical data

### Electrical data

Nominal input voltage	220...240 V
Nominal output current	350 mA
Nominal output power	8.4...14.7 W <sup>1)</sup>
Nominal output voltage	24...42 V
Maximum output power	14.7 W
Mains frequency	50/60 Hz
Input voltage AC	198...264 V
Device power loss	2.59 W <sup>2)</sup>
Efficiency in full-load	85 % <sup>3)</sup>
Galvanic isolation primary/secondary	SELV
Inrush current	8.8 A <sup>4)</sup>
Max. ECG no. on circuit breaker 10 A (B)	51
Max. ECG no. on circuit breaker 16 A (B)	83
Output current tolerance	±7.5 %
Output PSTLM	≤1
Output ripple current (100 Hz)	< 5 %
Output SVM	≤0.4
Power factor λ	0.95
Protective conductor current	<0.7 mA
Surge capability (L-N)	1 kV
Surge capability (L/N-Ground)	2 kV <sup>5)</sup>
Total harmonic distortion	10 % <sup>6)</sup>
U-OUT (working voltage)	60 V
Current set	Fixed current

1) Partial load

2) At 230 V, Input power 17.29 W max.


3) at 230 V, 50 Hz

4)  $t_{width} = 6.8 \mu s$  typical (measured at 50 %  $I_{peak}$ )

5) L/N – PE acc to EN 61547 Clause 5.7

6) At full load

## Dimensions & weight

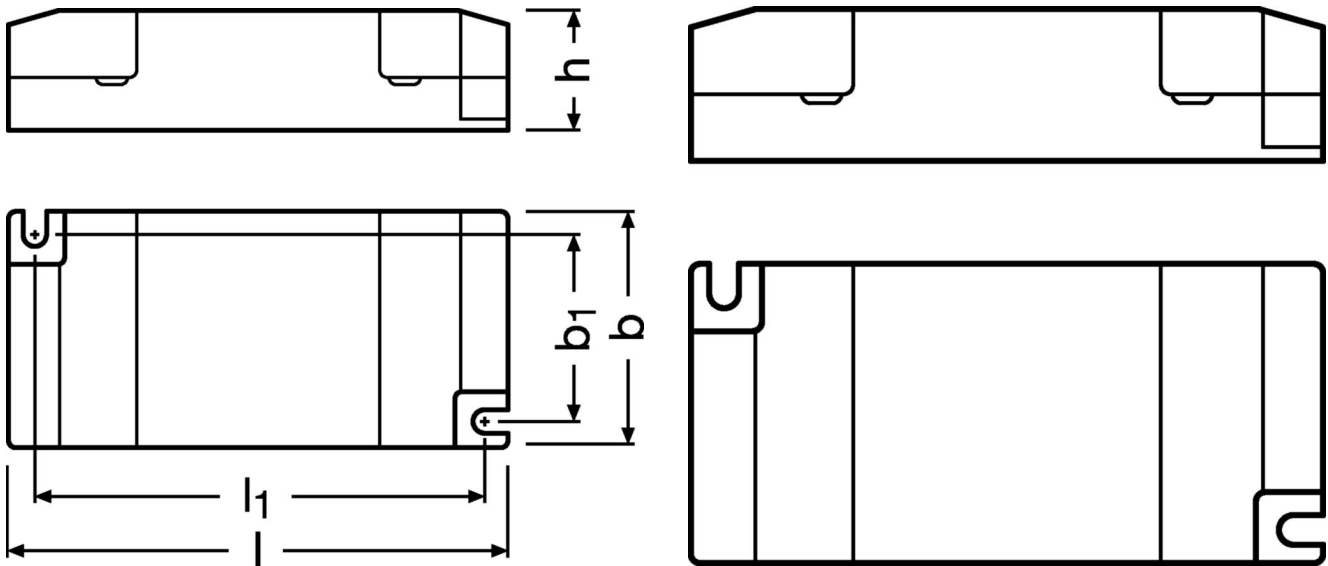

<b>Length</b>	90.0 mm
<b>Height</b>	22.0 mm
<b>Width</b>	43.0 mm
<b>Product weight</b>	52.00 g
<b>Cable cross-section, input side</b>	0.5...1.5 mm <sup>2</sup> / 0.75...1.5 mm <sup>2</sup> <sup>1)</sup>
<b>Cable cross-section, output side</b>	0.5...1.5 mm <sup>2</sup> / 0.75...1.5 mm <sup>2</sup> <sup>1)</sup>
<b>Wire preparation length, input side</b>	7...8 mm
<b>Wire preparation length, output side</b>	7...8 mm
<b>Mounting hole spacing, length</b>	80.0 mm
<b>Mounting hole spacing, width</b>	34.0 mm

1) Build in/ Independent

## Colors & materials

<b>Casing material</b>	Plastic housing
------------------------	-----------------

## Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+50 °C
<b>Max.housing temperature in case of fault</b>	110 °C
<b>Maximum temperature at tc test point</b>	75 °C
<b>Permitted rel. humidity during operation</b>	5...85 % <sup>1)</sup>
<b>Temperature range at storage</b>	-40...+85 °C

1) Non-condensing

## Lifespan

<b>ECG lifetime</b>	30000 h / 50000 h <sup>1)</sup>
---------------------	---------------------------------

1) At maximum  $T_c = 75^\circ\text{C}$  / 10% failure rate / At maximum  $T_c = 65^\circ\text{C}$  / 10% failure rate

## Additional product data

<b>Encapsulated</b>	No
<b>Predecessor EAN</b>	4062172167475

## Capabilities

<b>Dimmable</b>	No
<b>Max. cable length to lamp/LED module</b>	2.0 m <sup>1)</sup>
<b>Overload protection</b>	Automatic reversible
<b>Overheating protection</b>	Electronic switch off
<b>Suitable for emergency lighting</b>	No
<b>Suitable for fixtures with prot. class</b>	I / II
<b>Suitable for through-wiring</b>	No
<b>Type of connection, input side</b>	Push terminal
<b>Type of connection, output side</b>	Push terminal
<b>Intended for no-load operation</b>	No
<b>No-load proof</b>	Yes
<b>Number of channels</b>	1
<b>Short-circuit protection</b>	Automatic reversible

1) Output wires must be routed as close as possible to each other

## Programming

Programming device	not relevant
Tuner4TRONIC	No
Tuner4TRONIC Field App	No

## Certificates & standards

Type of protection	IP20
Approval marks – approval	CE / CCC / RCM / ENEC 25 / UKCA <sup>1)</sup>
Standards	Acc. to IEC 61347-1 / Acc. to IEC 61347-2-13 / Acc. to IEC 62384 / Acc. to IEC 61000-3-2 / Acc. to IEC 61547 / Acc. to IEC 61000-3-3

1) In preparation

## Logistical data

Commodity code	85044083900
----------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Declaration No. in SCIP database	In work
Date of Declaration	29-07-2024
Primary Article Identifier	4062172355513
SCIP_STATUS	In work
SCIP_ID	d4636371-cfc8-43e7-ac65-5fbd71eadaaf

## Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Download Data

File		
Certificates	PDF	▶ ELEMENT G4 ENEC 64142225031702 U6 120723
Certificates	PDF	▶ ELEMENT G4 CCC 6 15W build in 2023171002004881
Mandatory Publications	PDF	▶ ELEMENT G4 CE 4460618 01 280723
Mandatory Publications	PDF	▶ ELEMENT G4 UK DoC 4460638 01 220923
User instruction	PDF	▶ UI ELEMENT G4



## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172355513	ELEMENT 15/220-240/350	Shipping carton box 50 Pieces	321 x 194 x 138 mm	8.59 dm <sup>3</sup>	57.46 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.