

OPTOTRONIC® LED Power Supply

OT FIT 25/220-240/500 NFC L

<ul style="list-style-type: none"> 1 220... 2 240V 3 	OPTOTRONIC® OT FIT 25/220-240/500 NFC L Constant current LED Power Supply	Inventronics GmbH Birkhof Allee 65 86153 Augsburg Germany www.inventronicsgled.com	Connect PE to case or PIN 3 wire preparation push in $\leq 0.5 - 1.5 \text{ mm}$	IS 15885 (Part 2/Sec 13) R-41051349 www.bis.gov.in	SELV [EL]	LED + ● 21 LED - ● 22 LED + ● 23 LED - ● 24 U-OUT = 60V													
<table border="1"> <tr> <th>I_{rated} [mA]</th> <th>P_{rated} [W]</th> <th>U_{rated} [V]</th> <th>$U_{\text{off}/f_{\text{off}}}$</th> <th>$I_{\text{in}}$ [A]</th> <th>λ</th> <th>t_c [°C]</th> </tr> <tr> <td>170 - 800</td> <td>25</td> <td>20 - 51</td> <td>220-240V 0/50/60 Hz</td> <td>0.14</td> <td>0.81C- 0.95</td> <td>-25...80</td> </tr> </table>	I_{rated} [mA]	P_{rated} [W]	U_{rated} [V]	$U_{\text{off}/f_{\text{off}}}$	I_{in} [A]	λ	t_c [°C]	170 - 800	25	20 - 51	220-240V 0/50/60 Hz	0.14	0.81C- 0.95	-25...80		Made in China OSRAM	Designed and engineered in Germany	picture only for reference, valid print on product ⁵⁾	
I_{rated} [mA]	P_{rated} [W]	U_{rated} [V]	$U_{\text{off}/f_{\text{off}}}$	I_{in} [A]	λ	t_c [°C]													
170 - 800	25	20 - 51	220-240V 0/50/60 Hz	0.14	0.81C- 0.95	-25...80													

OT FIT 35/220-240/700 NFC L


<ul style="list-style-type: none"> 1 220... 2 240V 3 	OPTOTRONIC® OT FIT 35/220-240/700 NFC L Constant current LED Power Supply	Inventronics GmbH Birkhof Allee 65 86153 Augsburg Germany www.inventronicsgled.com	Connect PE to case or PIN 3 wire preparation push in $\leq 0.5 - 1.5 \text{ mm}$	IS 15885 (Part 2/Sec 13) R-41051349 www.bis.gov.in	SELV [EL]	LED + ● 21 LED - ● 22 LED + ● 23 LED - ● 24 U-OUT = 60V												
<table border="1"> <tr> <th>I_{rated} [mA]</th> <th>P_{rated} [W]</th> <th>U_{rated} [V]</th> <th>$U_{\text{off}/f_{\text{off}}}$</th> <th>$I_{\text{in}}$ [A]</th> <th>λ</th> <th>t_c [°C]</th> </tr> <tr> <td>250 - 700</td> <td>35</td> <td>20 - 51</td> <td>220-240V 0/50/60 Hz</td> <td>0.18</td> <td>0.74C- 0.98</td> <td>-25...80</td> </tr> </table>	I_{rated} [mA]	P_{rated} [W]	U_{rated} [V]	$U_{\text{off}/f_{\text{off}}}$	I_{in} [A]	λ	t_c [°C]	250 - 700	35	20 - 51	220-240V 0/50/60 Hz	0.18	0.74C- 0.98	-25...80		Made in China OSRAM	Designed and engineered in Germany	picture only for reference, valid print on product ⁵⁾
I_{rated} [mA]	P_{rated} [W]	U_{rated} [V]	$U_{\text{off}/f_{\text{off}}}$	I_{in} [A]	λ	t_c [°C]												
250 - 700	35	20 - 51	220-240V 0/50/60 Hz	0.18	0.74C- 0.98	-25...80												

OT FIT 55/220-240/1A0 NFC L


<ul style="list-style-type: none"> 1 220... 2 240V 3 	OPTOTRONIC® OT FIT 55/220-240/1A0 NFC L Constant current LED Power Supply	Inventronics GmbH Birkhof Allee 65 86153 Augsburg Germany www.inventronicsgled.com	Connect PE to case or PIN 3 wire preparation push in $\leq 0.5 - 1.5 \text{ mm}$	IS 15885 (Part 2/Sec 13) R-41051349 www.bis.gov.in	SELV [EL]	LED + ● 21 LED - ● 22 LED + ● 23 LED - ● 24 U-OUT = 60V												
<table border="1"> <tr> <th>I_{rated} [mA]</th> <th>P_{rated} [W]</th> <th>U_{rated} [V]</th> <th>$U_{\text{off}/f_{\text{off}}}$</th> <th>$I_{\text{in}}$ [A]</th> <th>λ</th> <th>t_c [°C]</th> </tr> <tr> <td>400-1050</td> <td>54</td> <td>20 - 51</td> <td>220-240V 0/50/60 Hz</td> <td>0.27</td> <td>0.71C- 0.96</td> <td>-25...80</td> </tr> </table>	I_{rated} [mA]	P_{rated} [W]	U_{rated} [V]	$U_{\text{off}/f_{\text{off}}}$	I_{in} [A]	λ	t_c [°C]	400-1050	54	20 - 51	220-240V 0/50/60 Hz	0.27	0.71C- 0.96	-25...80		Made in China OSRAM	Designed and engineered in Germany	picture only for reference, valid print on product ⁵⁾
I_{rated} [mA]	P_{rated} [W]	U_{rated} [V]	$U_{\text{off}/f_{\text{off}}}$	I_{in} [A]	λ	t_c [°C]												
400-1050	54	20 - 51	220-240V 0/50/60 Hz	0.27	0.71C- 0.96	-25...80												

OT FIT 75/220-240/1A4 NFC L

<ul style="list-style-type: none"> 1 220... 2 240V 3 	OPTOTRONIC® OT FIT 75/220-240/1A4 NFC L Constant current LED Power Supply	Inventronics GmbH Birkhof Allee 65 86153 Augsburg Germany www.inventronicsgled.com	Connect PE to case or PIN 3 wire preparation push in $\leq 0.5 - 1.5 \text{ mm}$	IS 15885 (Part 2/Sec 13) R-41051349 www.bis.gov.in	SELV [EL]	LED + ● 21 LED - ● 22 LED + ● 23 LED - ● 24 U-OUT = 60V												
<table border="1"> <tr> <th>I_{rated} [mA]</th> <th>P_{rated} [W]</th> <th>U_{rated} [V]</th> <th>$U_{\text{off}/f_{\text{off}}}$</th> <th>$I_{\text{in}}$ [A]</th> <th>λ</th> <th>t_c [°C]</th> </tr> <tr> <td>600-1400</td> <td>72</td> <td>20 - 51</td> <td>220-240V 0/50/60 Hz</td> <td>0.36</td> <td>0.84C- 0.98</td> <td>-25...80</td> </tr> </table>	I_{rated} [mA]	P_{rated} [W]	U_{rated} [V]	$U_{\text{off}/f_{\text{off}}}$	I_{in} [A]	λ	t_c [°C]	600-1400	72	20 - 51	220-240V 0/50/60 Hz	0.36	0.84C- 0.98	-25...80		Made in China OSRAM	Designed and engineered in Germany	picture only for reference, valid print on product ⁵⁾
I_{rated} [mA]	P_{rated} [W]	U_{rated} [V]	$U_{\text{off}/f_{\text{off}}}$	I_{in} [A]	λ	t_c [°C]												
600-1400	72	20 - 51	220-240V 0/50/60 Hz	0.36	0.84C- 0.98	-25...80												

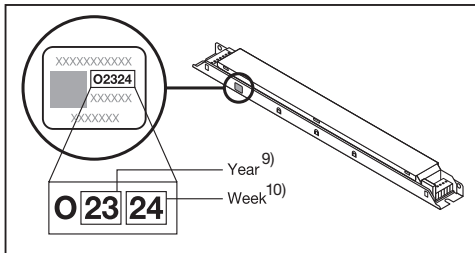

	25 W	35 W	55 W	75 W
B16	90 x	65 x	13 x	13 x
B10	50 x	40 x	8 x	8 x
	$\leq 16 \text{ A}$	$\leq 16 \text{ A}$	$\leq 20 \text{ A}$	$\leq 40 \text{ A}$
TH	100 μs	100 μs	200 μs	200 μs
V_{NAC}	198 - 264 V			
V_{NDC}	176 - 276 V			

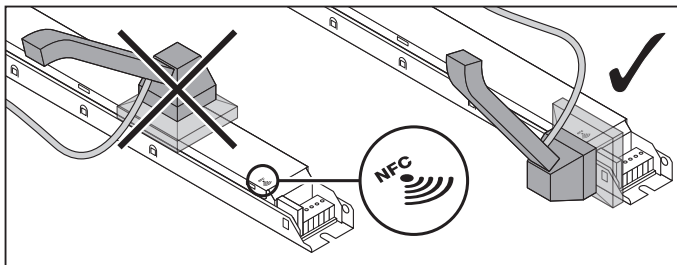

OSRAM

