


LINEARlight FLEX Protect Uniformity

LFP800S-G5...L1 | LFP1200S-G5...L1 | LFP2000S-G5...L1

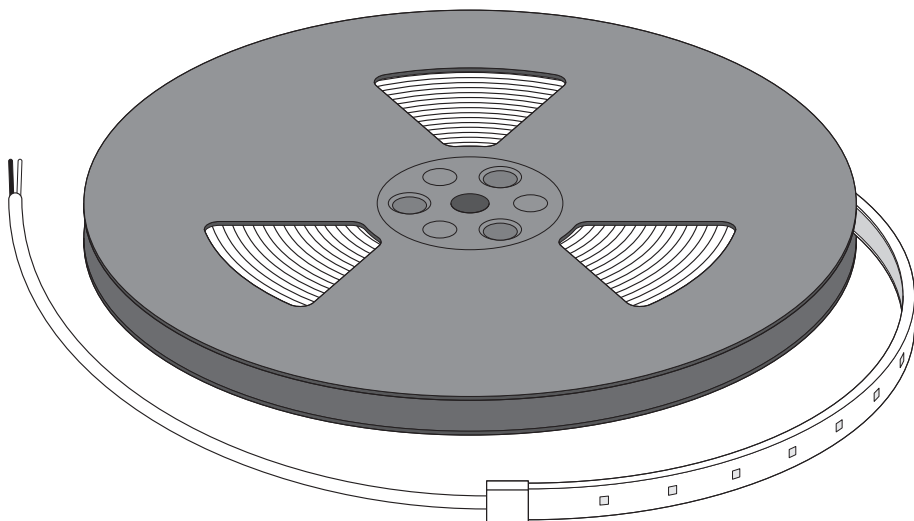

LFP800S

	V	W/m	W	A/m	A	∠	Tc/°C	Ts/°C	↔
LFP800S-G5-825-10 L1	24	8.0	80.0	0.33	3.33	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-827-10 L1	24	7.2	72.0	0.30	3.00	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-830-10 L1	24	6.7	67.0	0.28	2.79	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-835-10 L1	24	6.2	62.0	0.26	2.58	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-840-10 L1	24	6.1	61.0	0.25	2.54	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-847-10 L1	24	6.1	61.0	0.25	2.54	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-857-10 L1	24	6.1	61.0	0.25	2.54	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-880-10 L1	24	6.1	61.0	0.25	2.54	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-927-10 L1	24	9.2	92.0	0.38	3.83	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-930-10 L1	24	8.0	80.0	0.33	3.33	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-935-10 L1	24	7.5	75.0	0.31	3.13	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-940-10 L1	24	7.5	75.0	0.31	3.13	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-947-10 L1	24	7.5	75.0	0.31	3.13	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-957-10 L1	24	7.0	70.0	0.29	2.92	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-980-10 L1	24	7.0	70.0	0.29	2.92	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-927R-10 L1	24	9.5	95.0	0.40	3.96	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-930R-10 L1	24	8.3	83.0	0.35	3.46	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-935R-10 L1	24	8.3	83.0	0.35	3.46	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-940R-10 L1	24	7.3	73.0	0.30	3.04	120	-30...80	-40...85	≤ 10000mm

LFP1200S

	V	W/m	W	A/m	A	∠	Tc/°C	Ts/°C	↔
LFP1200S-G5-825-10 L1	24	11.6	116.0	0.48	4.83	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-827-10 L1	24	10.6	106.0	0.44	4.42	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-830-10 L1	24	9.8	98.0	0.41	4.08	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-835-10 L1	24	9.6	96.0	0.40	4.00	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-840-10 L1	24	9.4	94.0	0.39	3.92	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-847-10 L1	24	9.4	94.0	0.39	3.92	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-857-10 L1	24	9.4	94.0	0.39	3.92	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-880-10 L1	24	9.4	94.0	0.39	3.92	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-927-10 L1	24	11.6	116.0	0.48	4.83	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-930-10 L1	24	11.6	116.0	0.48	4.83	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-935-10 L1	24	10.9	109.0	0.45	4.54	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-940-10 L1	24	10.9	109.0	0.45	4.54	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-947-10 L1	24	10.9	109.0	0.45	4.54	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-957-10 L1	24	10.0	100.0	0.42	4.17	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-980-10 L1	24	10.0	100.0	0.42	4.17	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-927R-05 L1	24	14.0	70.0	0.58	2.92	120	-30...80	-40...85	≤ 5000mm
LFP1200S-G5-930R-05 L1	24	12.0	60.0	0.50	2.50	120	-30...80	-40...85	≤ 5000mm
LFP1200S-G5-935R-05 L1	24	12.0	60.0	0.50	2.50	120	-30...80	-40...85	≤ 5000mm
LFP1200S-G5-940R-05 L1	24	10.6	53.0	0.44	2.21	120	-30...80	-40...85	≤ 5000mm

LFP2000S	V	W/m	W	A/m	A	∠	Tc/°C	Ts/°C	↔
LFP2000S-G5-825-05 L1	24	19.6	98.0	0.82	4.08	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-827-05 L1	24	18.1	90.5	0.75	3.77	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-830-05 L1	24	17.3	86.5	0.72	3.60	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-835-05 L1	24	16.0	80.0	0.67	3.33	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-840-05 L1	24	15.2	76.0	0.63	3.17	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-847-05 L1	24	15.2	76.0	0.63	3.17	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-857-05 L1	24	15.2	76.0	0.63	3.17	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-880-05 L1	24	15.2	76.0	0.63	3.17	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-927-05 L1	24	21.0	105.0	0.88	4.38	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-930-05 L1	24	19.6	98.0	0.82	4.08	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-935-05 L1	24	18.5	92.5	0.77	3.85	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-940-05 L1	24	18.5	92.5	0.77	3.85	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-947-05 L1	24	18.5	92.5	0.77	3.85	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-957-05 L1	24	17.3	86.5	0.72	3.60	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-980-05 L1	24	17.3	86.5	0.72	3.60	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-927R-05 L1	24	21.0	105.0	0.88	4.38	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-930R-05 L1	24	19.5	97.5	0.81	4.06	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-935R-05 L1	24	19.5	97.5	0.81	4.06	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-940R-05 L1	24	18.1	90.5	0.75	3.77	120	-30...80	-40...85	≤ 5000mm


IP67

ENDCAP-IP67 KIT 10PCS
EAN 4062172176552


10 x



1x




LTS-2000 SLIM Track
EAN 4062172207300



CONN-FLEX-IP67-2P KIT 5PCS
EAN 4062172176590

5x




IP67



JUMPER-FLEX-IP67-2P KIT 5PCS
EAN 4062172176576




5x









IP67
















LINEARlight FLEX Protect Uniformity

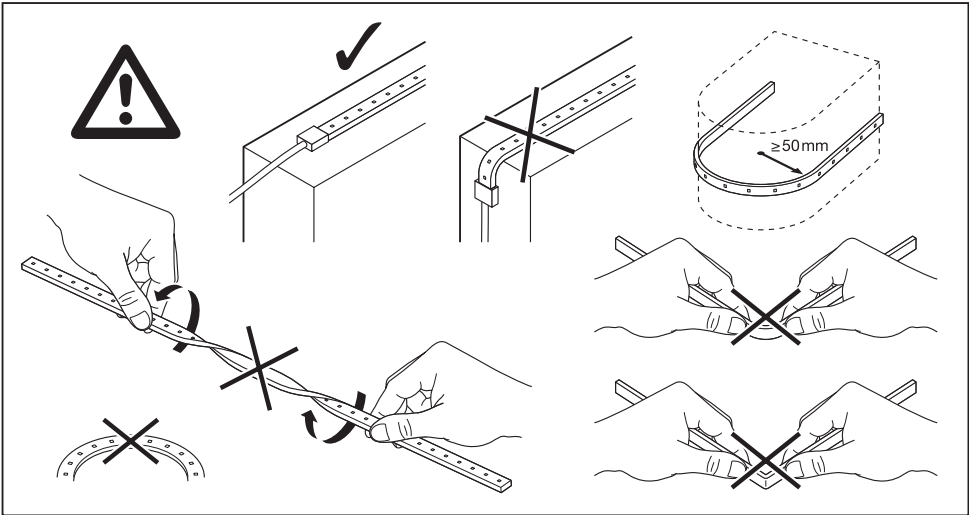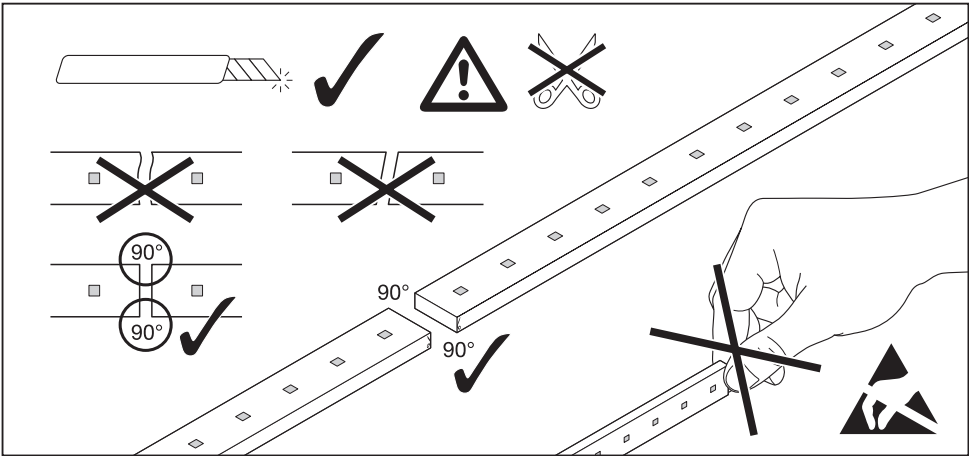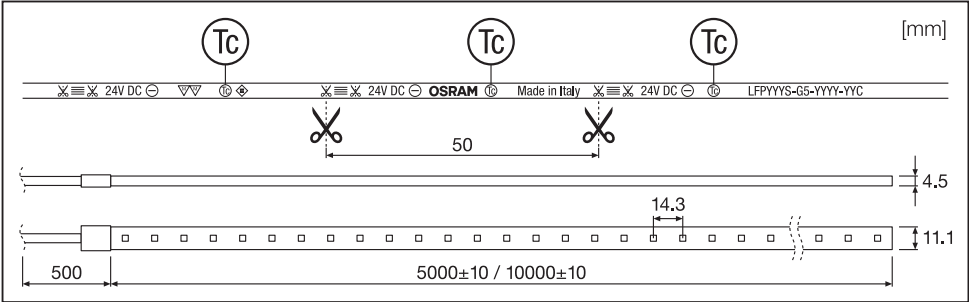

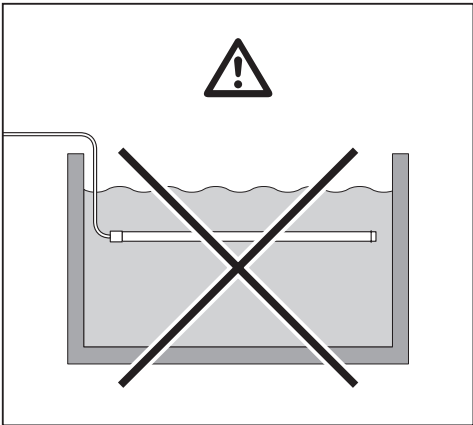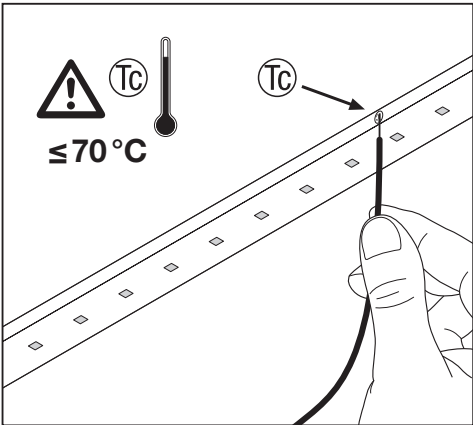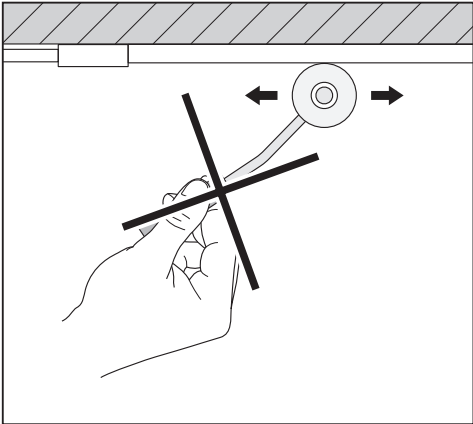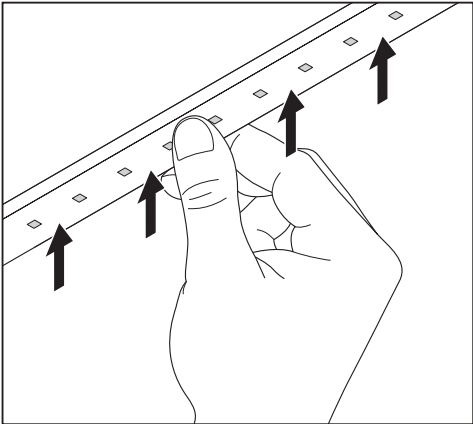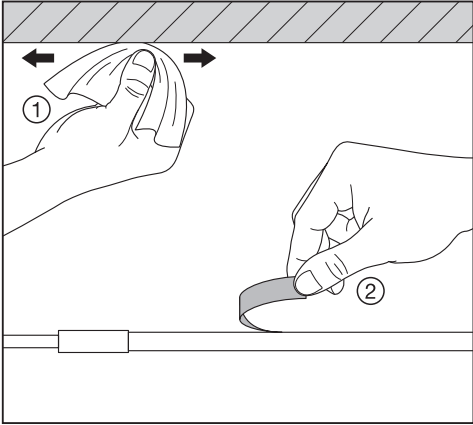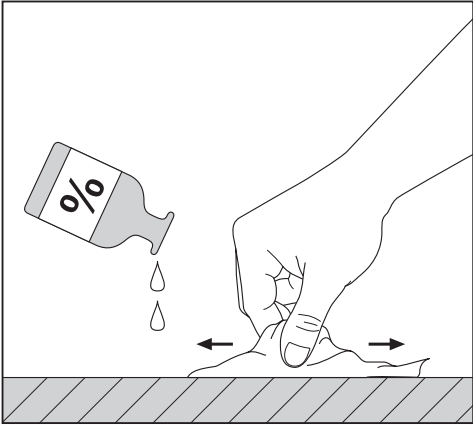


IP67

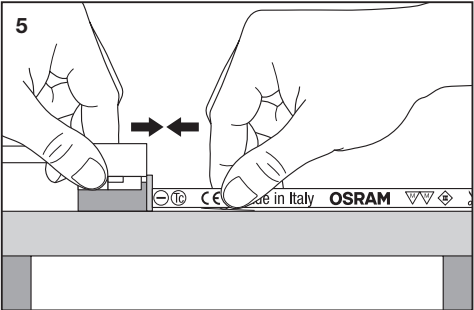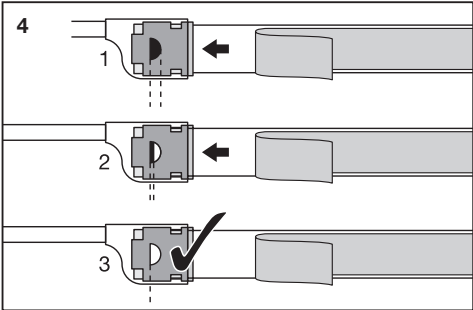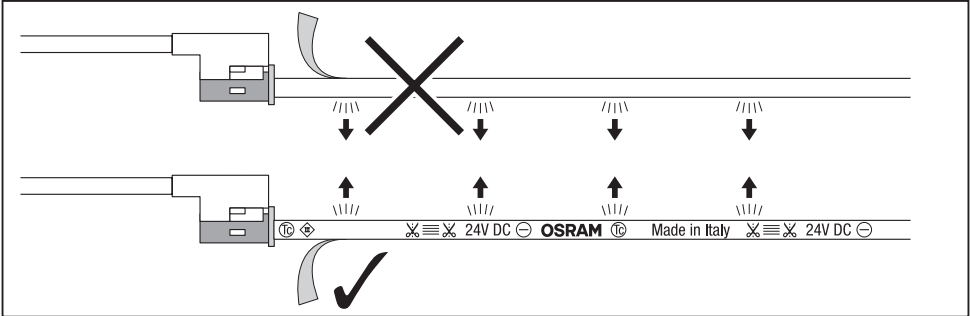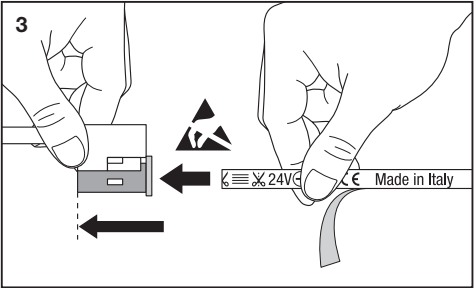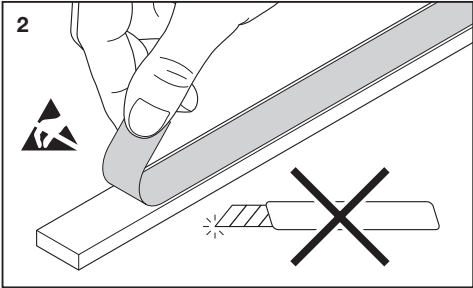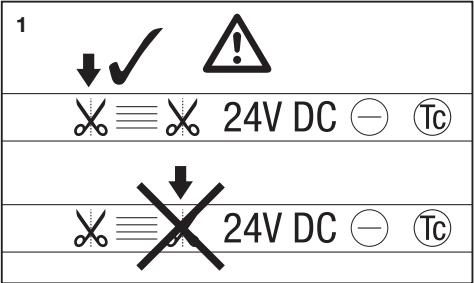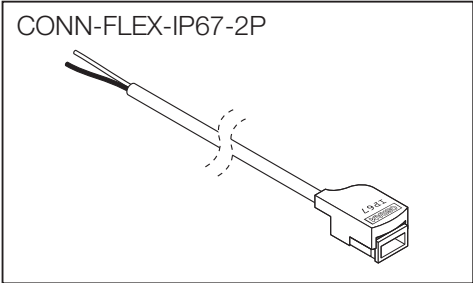


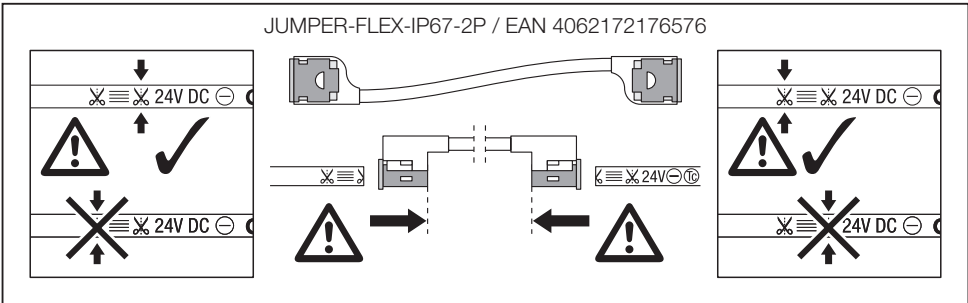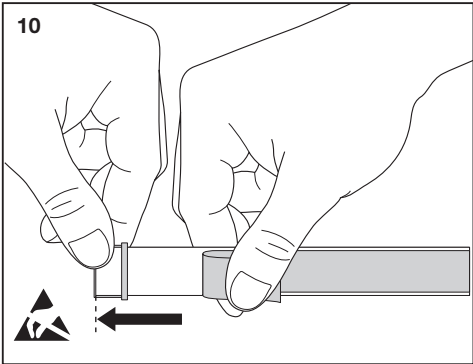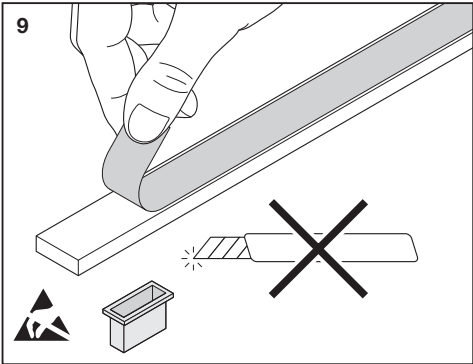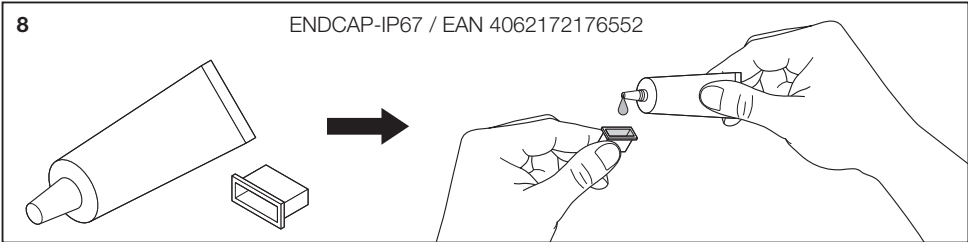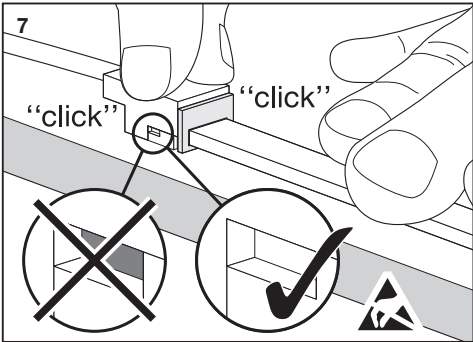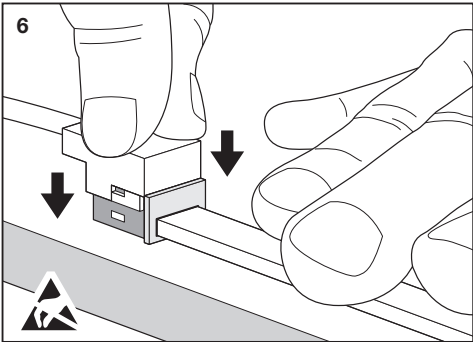

OPTIONAL*

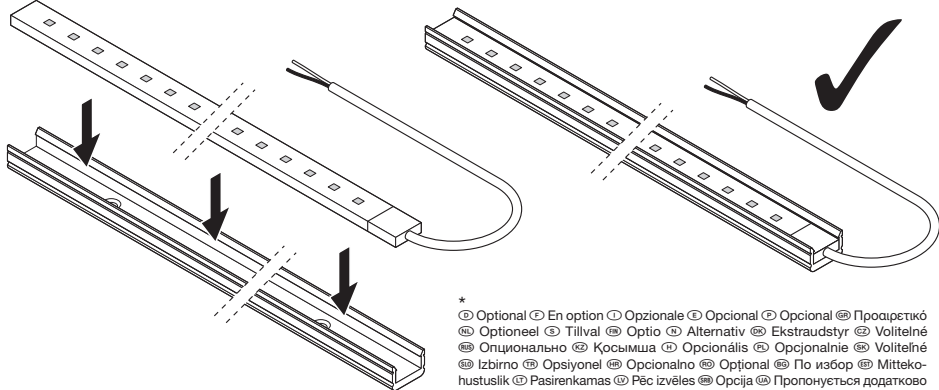

*
 ☐ Optional ☐ En option ☐ Opzionale ☐ Opcional ☐ Opcional ☐ Προαιρετικό
 ☐ Optioneel ☐ Tillval ☐ Optio ☐ Alternativ ☐ Ekstraudstyr ☐ Voliteľné
 ☐ Опціонально ☐ Қосымша ☐ Opcionalis ☐ Opcionalnie ☐ Voliteľné
 ☐ Izbirno ☐ Opsiyonel ☐ Opcionalno ☐ Opțional ☐ По izbor ☐ Mittekahustuslik
 ☐ Pasirenkamas ☐ Pēc izvēles ☐ Opcija ☐ Пропонуються додатково



24V



SELV
SELV-Equivalent



Eye Safety RG 1 (low risk)*
EN 62471

*
 ☐ Augensicherheit RG 1 (geringes Risiko) ☐ Risque pour les yeux RG 1 (faible risque) ☐ Sicurezza fotobiologica: gruppo di rischio 1 (rischio basso)
 ☐ Protección ocular RG 1 (riesgo bajo) ☐ Segurança para os olhos RG 1 (baixo risco) ☐ Κατηγορία ασφαλείας οφθαλμών RG 1 (χαμηλού ρίσκου) ☐ Veiligheid voor de ogen RG 1 (laag risico) ☐ Ögonsäkerhet RG 1 (låg risk) ☐ Silmien turvallisuus RG 1 (vähäinen vaara) ☐ Øyesikkerhet RG 1 (liten risiko) ☐ Øjensikkerhet RG 1 (lav risiko) ☐ Bezpečnost očí RG 1 (riziková skupina 1 - nízké riziko) ☐ Зашита глас RG 1 (низкий риск) ☐ Кез қорғанысы RG 1 (төмен деңгейлі қауіп) ☐ Szemészeti biztonság RG1 kategória (alacsony kockázat) ☐ Bezpieczeństwo dla oczu RG 1 (niskie ryzyko) ☐ Bezpečnost očí RG 1 (riziková skupina 1 - nízké riziko) ☐ Varnost oči RG 1 (nizko tveganje) ☐ Göz Güvenliği RG 1 (düşük risk) ☐ Sigurnost očiju RG 1 (nizak rizik) ☐ Securitatea ochilor RG 1 (risc scăzut) ☐ Безопасност за очите RG 1 (с нисък риск) ☐ Ohutus silmadele RG 1 (madal risk) ☐ Akių sauga RG 1 (maža rizika) ☐ Acu drošība RG 1 (zems risks līmenis) ☐ Zaštita očiju RG 1 (mala opasnost) ☐ Зхист очей RG 1 (низький ризик)

CALUS

≤ 4.16A, suitable for damp and wet locations.
Class 2 power supply unit*

*
 ☐ Geeignet für feuchte und nasse Orte. Netzgerät der Klasse 2 ☐ Apprroprié pour une utilisation dans des endroits humides ou mouillés. Bloc d'alimentation de classe 2 ☐ Adatta per ambienti bagnati o umidi. Alimentatore Classe 2 ☐ Apto para ubicaciones húmedas y mojadas. Fuente de alimentación Clase 2 ☐ Apropriado para locais húmidos e molhados. Fonte de alimentação Classe 2 ☐ Κατάλληλο για περιοχές με υγρασία. Μονάδα τροφοδοτικού κατηγορίας 2 ☐ Geschikt voor klamme en vochtige locaties. Voedingskast klasse 2 ☐ Lämpilg för fuktiga och våta utrymmen. Strömförsörjningsenhet klass 2 ☐ Sopli kosteisiin ja märkiin paikkoihin. Luokan 2 virtalähdeyksikkö ☐ Egnert for fuktige og våde steder. Klasse 2 strømenhet ☐ Egnert til fugtige og våde omgivelser. Strømforsyningsenhet i klasse 2 ☐ Vhodné pro vlhká prostředí. Napájecí jednotka třídy 2 ☐ Подходить для мест с высокой влажностью. Блок питания класса 2 ☐ Дымқыл және ылғал ортаңар үшін қолайлы. 2-классқа жататын қуат блогы ☐ Alkalmas nyirkos és nedves helyekre. 2. osztályba tartozó tápegység ☐ Nadaje się do wilgotnych i mokrych pomieszczeń. Zasilacz klasy 2 ☐ Vhodné do vlhkého prostredia. Napájacia jednotka triedy 2 ☐ Primeno za vlažne in mokre lokacije. Napajalnik razreda 2 ☐ Nemli ve ıslak yerler. Sınıf 2 güç kaynağı ünitesi ☐ Pogodno za mokra i vlažna mjesta. Jedinica napajanja klase II ☐ Apt pentru locuri umede și ude. Unitate de alimentare cu energie de clasă 2 ☐ Подходящо за влажни и мокри помещения. Електрозахранващ модул клас 2 ☐ Sobib niiskettese ja määgadesse kohtadesse. 2. klassi toiteallikas ☐ Tinkama naudoti drėgnose ir šlapiose vietose. 2 klasės maitinimo blokas ☐ Piemērots mitrām un slapjām vietām. 2. klases barošanas bloks ☐ Pogodno za mokra i vlažna mesta. Jedinica za napajanje Klase 2 ☐ Підходить для сирих і вологих місць. Блок живлення класу 2

INVENTRONICS is a licensee of ams OSRAM. OSRAM is a trademark of ams OSRAM



IP67



C10449058
G15126323

12.09.23



Inventronics GmbH
 Berliner Allee 65
 86153 Augsburg
 Germany
www.inventronicsglobal.com