


LINEARlight FLEX Protect Infinite

LFP500I-G1-48








LFP1500I-G1-48



LFP3000I-G1-48

LFP4000I-G1-48

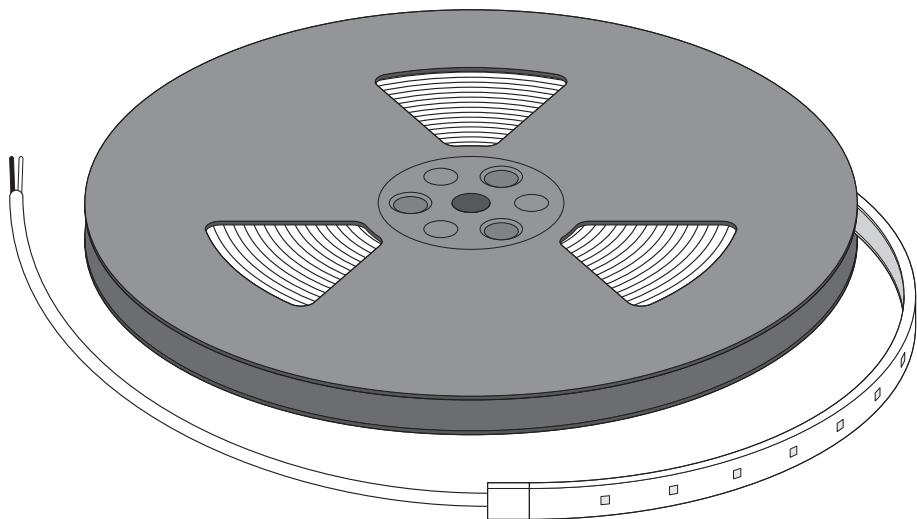


	V	W/m	W	A/m	A	∠	Tc[°C]	Ts[°C]	↔
LFP500I-G1	48	4.0	72.0	0.083	1.500	120°	≤ 80 °C	-40...+85 °C	≤ 18000 mm
LFP1500I-G1	48	9.8	117.6	0.204	2.450	120°	≤ 80 °C	-40...+85 °C	≤ 12000 mm
LFP3000I-G1	48	19.6	117.6	0.408	2.450	120°	≤ 80 °C	-40...+85 °C	≤ 6000 mm
LFP4000I-G1	48	26.4	158.4	0.550	3.300	120°	≤ 80 °C	-40...+85 °C	≤ 6000 mm

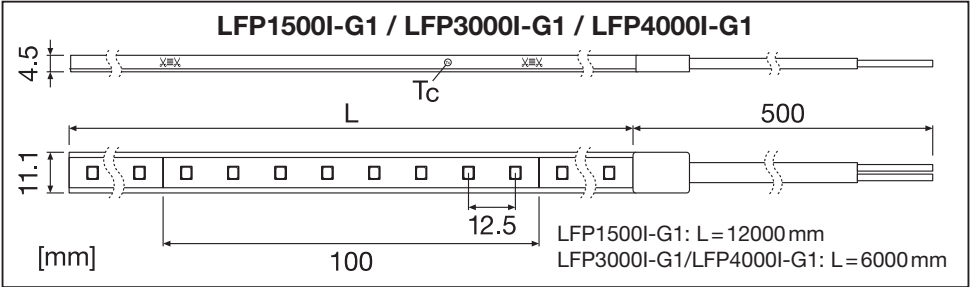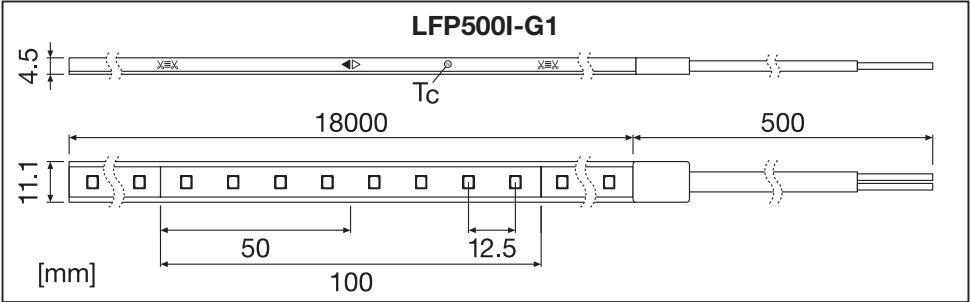

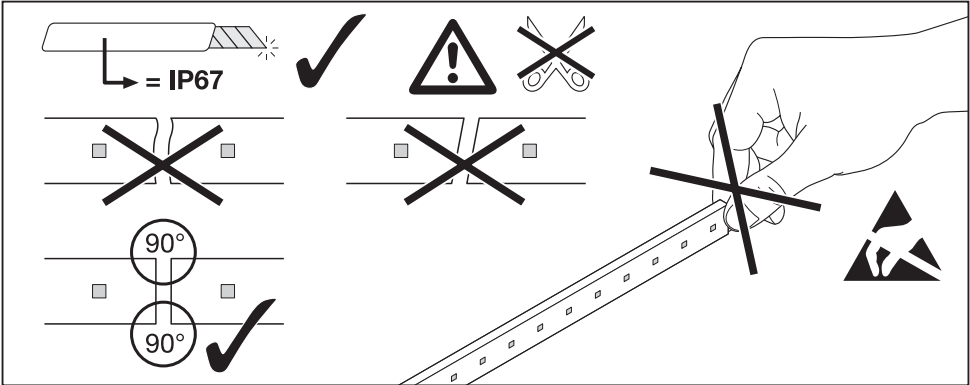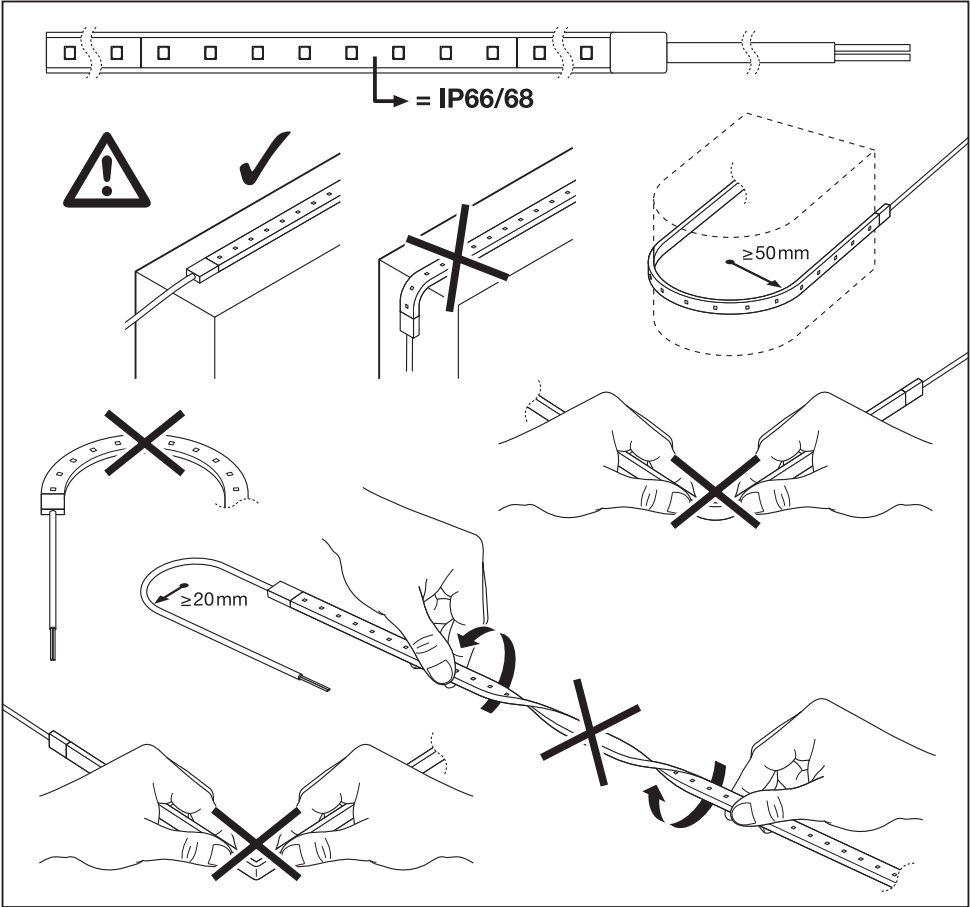

IP67

CONN-FLEX-IP67-2P KIT 5PCS
EAN 4062172176590

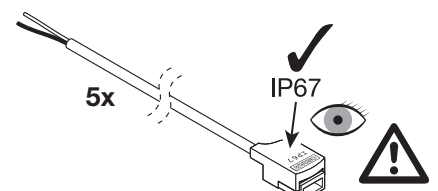


5x

IP67

Warning symbol: eye and exclamation mark.

JUMPER-FLEX-IP67-2P KIT 5PCS
EAN 4062172176576

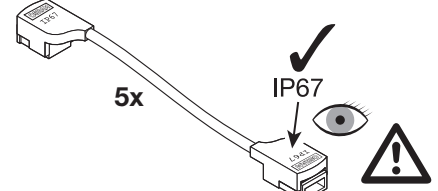


5x








IP67

Warning symbol: eye and exclamation mark.


1

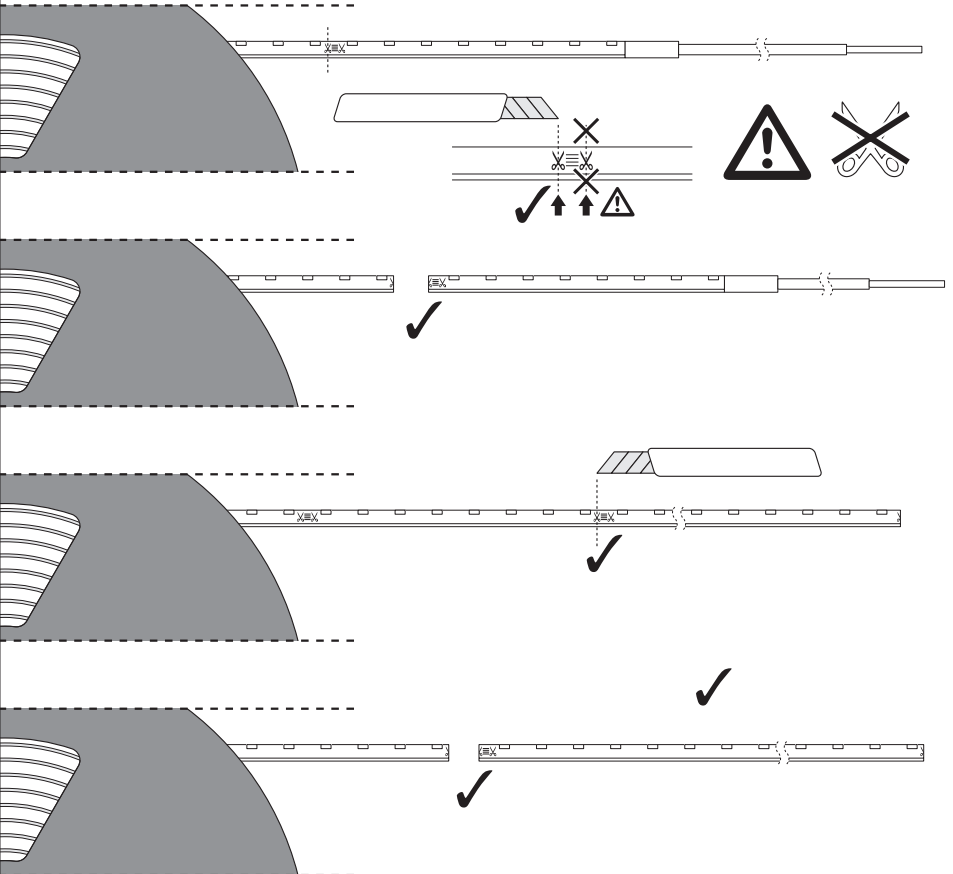



Warning symbol: exclamation mark and crossed-out scissors.

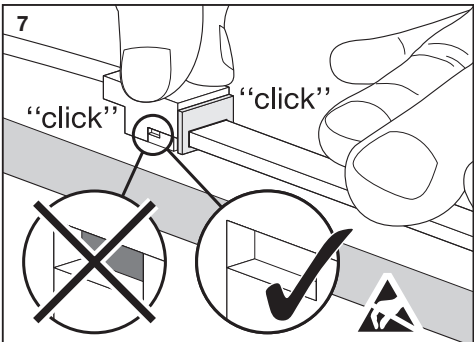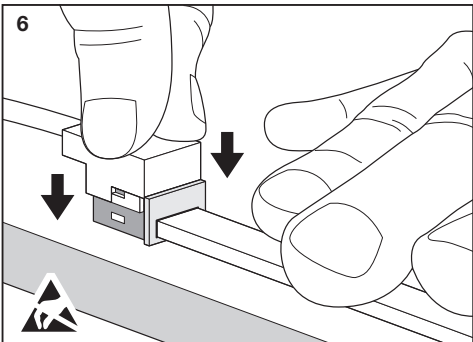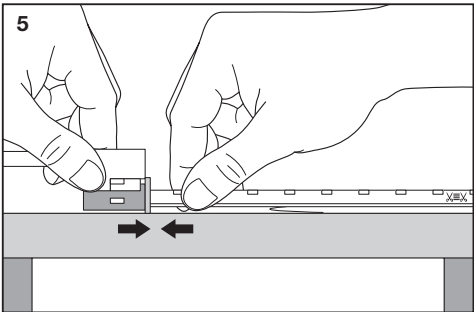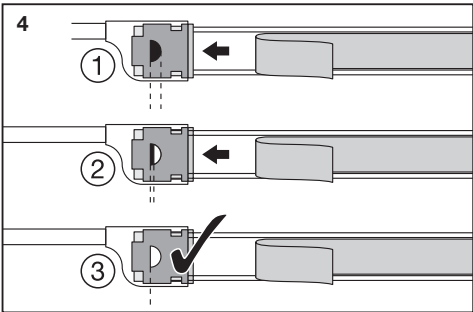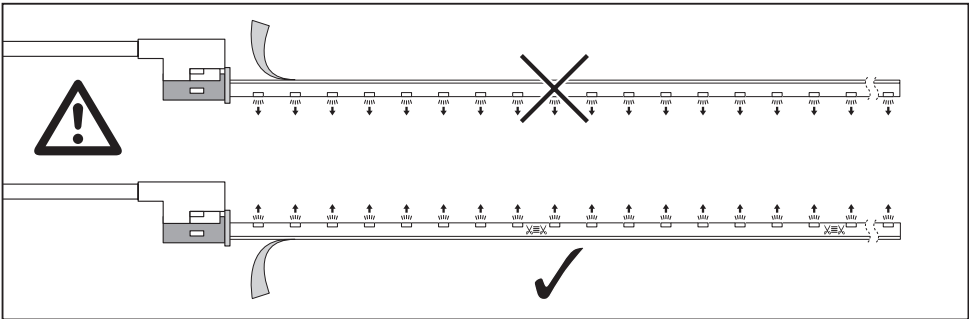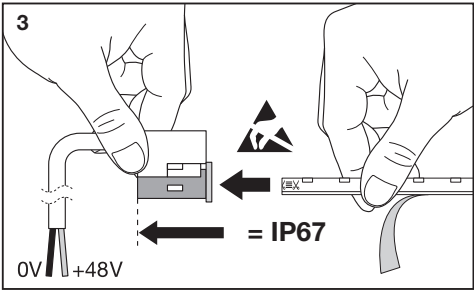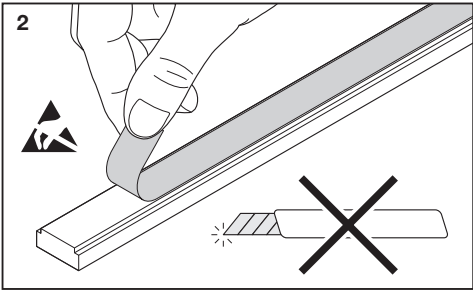

LFP500I-G1

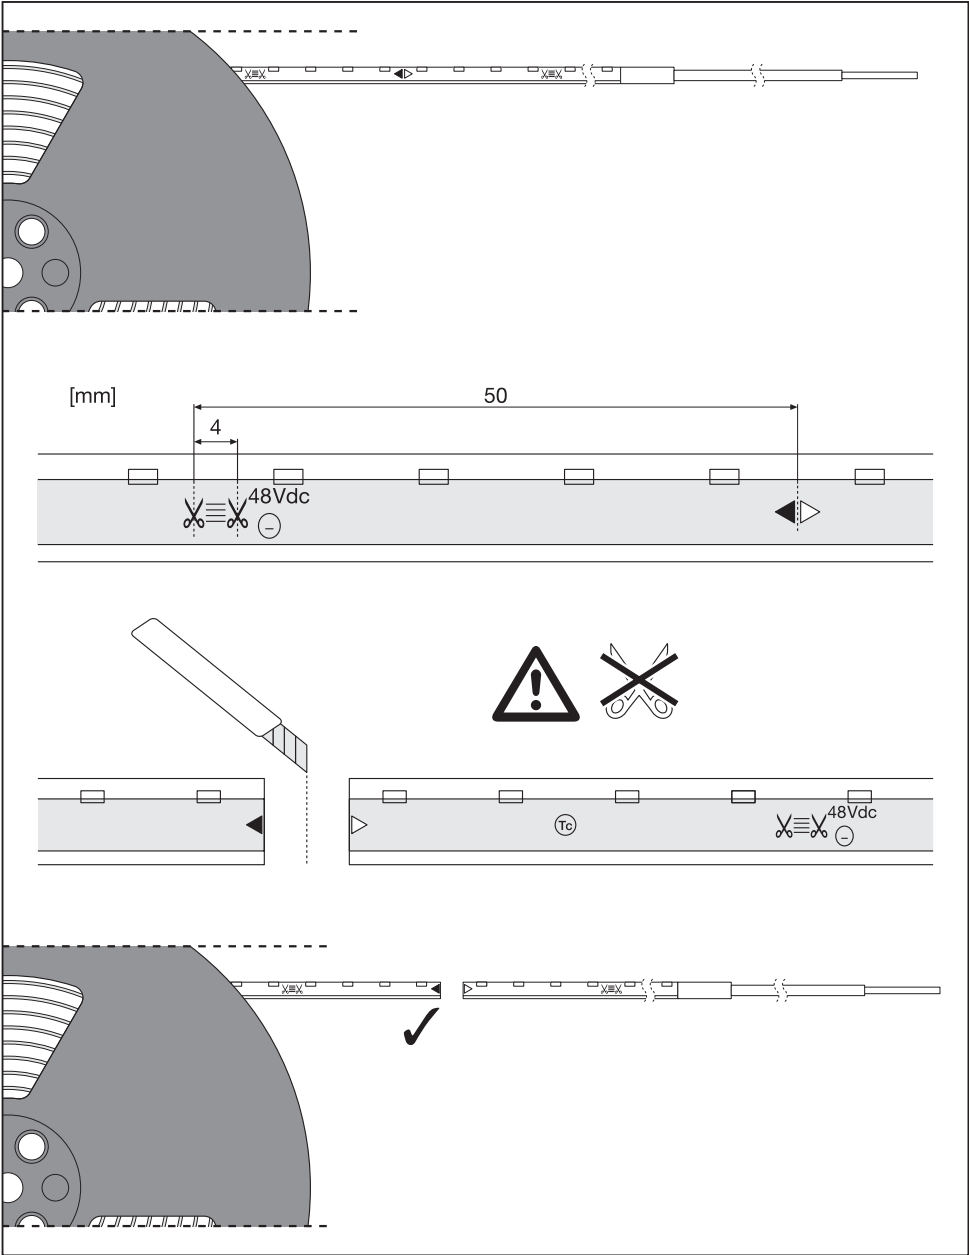

LFP500I-G1

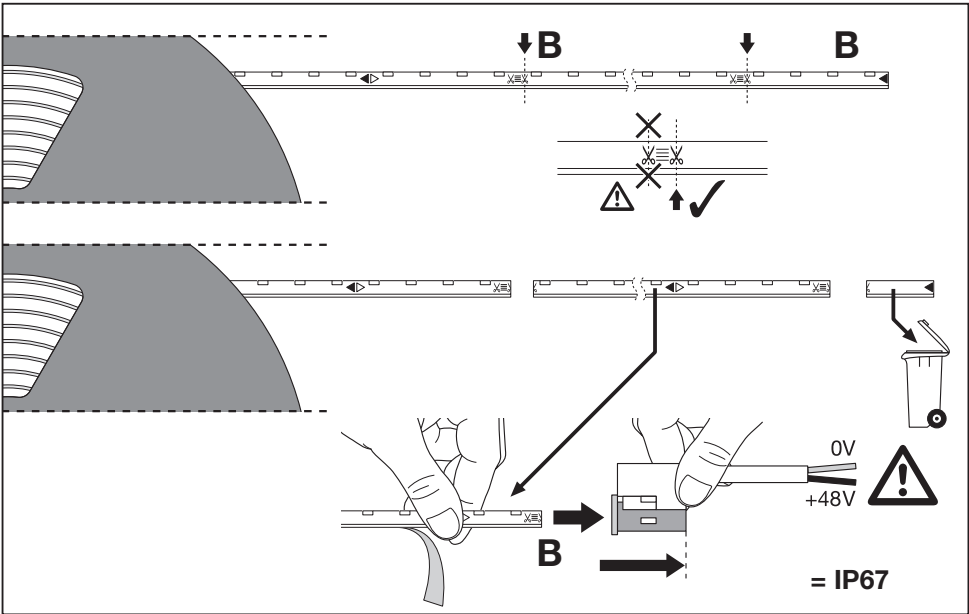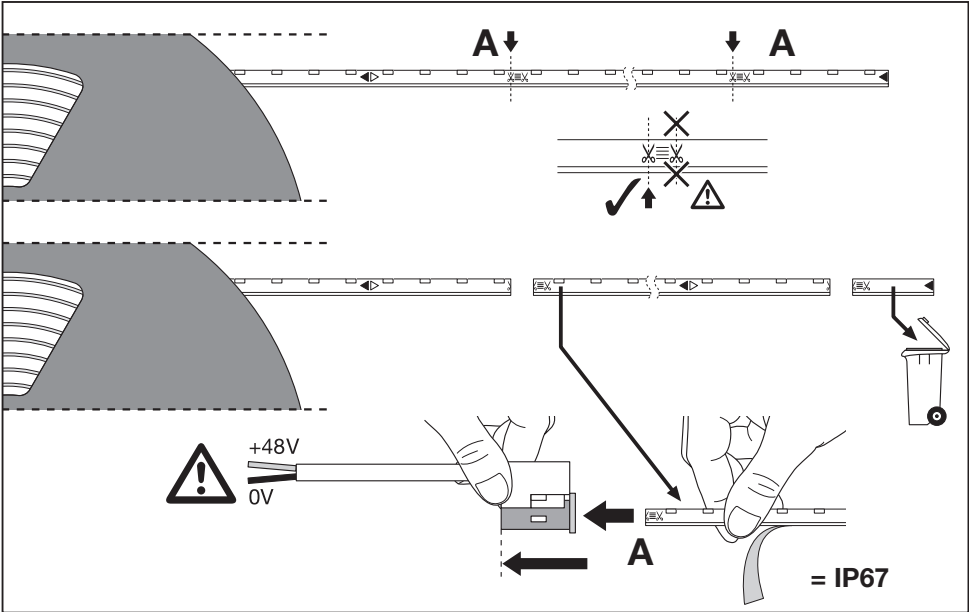


ENDCAP-IP67 KIT 10PCS


EAN 4062172176552

10x



1x



2

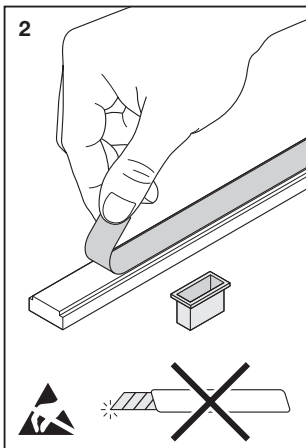

3

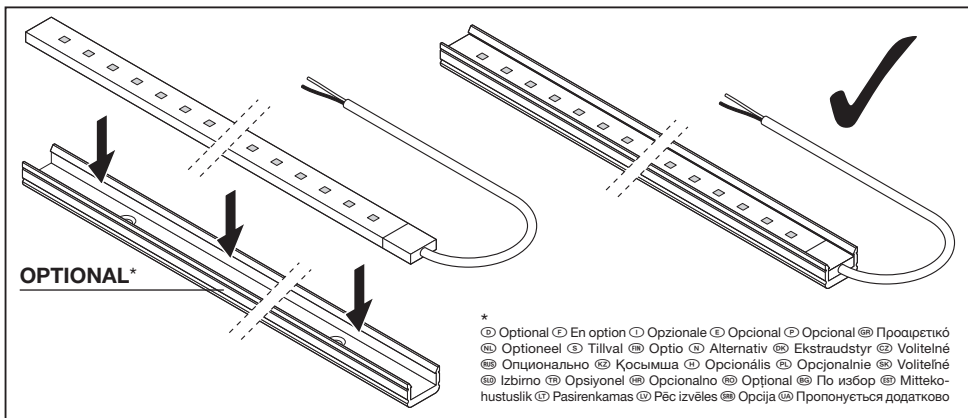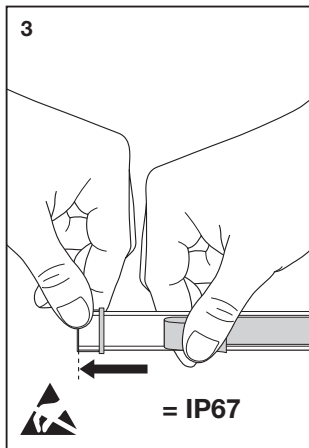

*
 Ⓢ Optional Ⓢ En option Ⓢ Opzionale Ⓢ Opcional Ⓢ Opcional Ⓢ Προαιρετικό
 Ⓢ Optioneel Ⓢ Tiilval Ⓢ Optio Ⓢ Alternativ Ⓢ Ekstraudstyr Ⓢ Voiteliné
 Ⓢ Опціонально Ⓢ Қосымша Ⓢ Opcionális Ⓢ Opcjonalnie Ⓢ Voiteliné
 Ⓢ Izbirno Ⓢ Orsionel Ⓢ Opcionalno Ⓢ Opțional Ⓢ По избор Ⓢ Mitteko-
 hustuslik Ⓢ Pasirenkamas Ⓢ Pēc izvēles Ⓢ Оpcija Ⓢ Пропонується додатково


CE **US**

≤2.08 A, suitable for dry and damp locations.

Class 2 power supply unit*

*
 Ⓢ Geeignet für trockene und feuchte Orte. Netzgerät der Klasse 2 Ⓢ Appropriate pour une utilisation dans des endroits secs et humides. Bloc d'alimentation de classe 2
 Ⓢ Adatta per ambienti secchi o umidi. Alimentatore Classe 2 Ⓢ Apto para ubicaciones secas y mojadas. Fuente de alimentación Clase 2 Ⓢ Adequado para locais secos e húmidos. Fonte de alimentação Classe 2 Ⓢ Κατάλληλο για στεγνές περιοχές και περιοχές με υγρασία. Μονάδα τροφοδοτικό κατηγορίας 2 Ⓢ Geschikt voor droge en vochtige locaties. Voedingskast klasse 2 Ⓢ Lämpölähtö für torra och fuktiga platser. Strömförsörjningsenhet klass 2 Ⓢ Soveltuu kuiviin ja kosteisiin paikkoihin. Luokan 2 virtalähdeyksikkö Ⓢ Kun egnet for tørre og fugtige steder. Klasse 2-strømenhet Ⓢ Egnert til tørre og fugtige faciliteter. Strømforsyningseenhet i klasse 2 Ⓢ Vhodné pro suchá i vlhká prostředí. Napájecí jednotka třídy 2 Ⓢ Подходить как для мест с высокой влажностью, так и сухой среды. Блок питания класса 2 Ⓢ Kuruğa және ылғалды жерлерде пайдалануға жарамды. 2-классты қуат блогы Ⓢ Száraz és nedves helyeken való használatra is alkalmas. 2. osztályba tartozó tápegység Ⓢ Nadaje się do suchych i wilgotnych pomieszczeń. Zasilacz klasy 2 Ⓢ Vhodné do suchého a vlhkého prostredia. Napájacia jednotka triedy 2 Ⓢ Primeno za suhe in vlažne lokacije. Napajalnik razreda 2 Ⓢ Kuru ve nemli yerler için uygundur. Sınıf 2 güç kaynağı ünitesi Ⓢ Pogodno za suha i vlažna mjesta. Jedinica napajanja klase 2 Ⓢ Adekvat pentru locuri uscate și umede. Unitate de alimentare cu energie de clasă 2 Ⓢ Подходящо за сухи и влажни помещения. Електрозахранващ модул клас 2 Ⓢ Sobib kuivadesse ja niisketesse kohtadesse. 2. klassi toiteallikas Ⓢ Tinka naudoti sausose ir drėgnose vietose. 2 klasės maitinimo blokas Ⓢ Piemērots gan sausām, gan mitrām vietām. 2. klases barošanas bloks Ⓢ Pogodno za suve i vlažne lokacije. Jedinica za napajanje Klase 2 Ⓢ Подходить для сухих и влажных мест. Блок живлення класу 2

INVENTRONICS is a licensee of ams OSRAM. OSRAM is a trademark of ams OSRAM



Inventronics GmbH
 Berliner Allee 65
 86153 Augsburg
 Germany

www.inventronicsglobal.com