

IT D0 200/220-240/24 C

24 V Single-channel Constant Voltage LED driver
Dimmable range 0 / 1% - 100%

Benefits

Dimmable via DALI, 0-10V, touch-dim or corridor
DALI-2 certified
24.2 V nominal output + 1.5 V adjustable
CC mode for 18...24 V output option




Applications

Hospitality, cove lighting, shops.
Suitable for indoor CLASS I and CLASS II luminaires.

Housing material: plastic, white

* image for information purpose only

Approvals

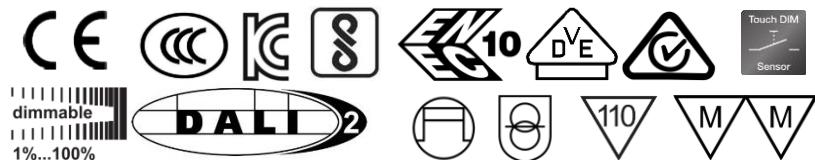

L	320 mm	Total length
B	60 mm	Width
H	30 mm	Height

When not printed on product label, they are under evaluation.

Product Features

- DALI-2 certified
- Single channel
- Lamp Failure detection
- CLASS II independent housing
- Smart Power Supply
- SELV, Vout: 24,2 V
- t_a range -20...+50°C
- Very low min dimming level: 1%
- Mains voltage: 220–240 V_{ac}
- 50'000 h lifetime at max t_c *
- 5 years guarantee*
- IP20 independent housing
- Touch-DIM and corridor compatibility
- Overload/Over temperature and Short circuit protection

*10% cumulated failure, 24 h = 14 h ON, 10 h Standby


Electrical specification

Item	Value	Unit	Remarks
INPUT	Nominal line voltage	220 – 240	V
	Mains line frequency	50 / 60	Hz
	AC voltage range	198 – 264	V
	Nominal current	0.98	A
	Total Harmonic Distortion (THD)	< 10	%
	Power factor λ	0.98	
	Efficiency in full load	93	%
	Device power loss	12.4	W
	Networked stand-by power	<0,50	W
	Protection class	II	
	Suitable for fixtures with prot. Class	I / II	
	Inrush current	135	A_{pk}
	Max. units per circuit breaker:		
	Max. ECG no. on circuit breaker 10 A (B)	4	
OUTPUT	Max. ECG no. on circuit breaker 16 A (B)	7	
	Max. ECG no. on circuit breaker 25 A (B)	12	
	Max. ECG no. on circuit breaker 32 A (B)	15	
	Max. ECG no. on circuit breaker 10 A (C)	8	
	Max. ECG no. on circuit breaker 16 A (C)	13	
	Max. ECG no. on circuit breaker 25 A (C)	20	
	Max. ECG no. on circuit breaker 32 A (C)	26	
DIMMING	Nominal voltage	24,2	V
		18...24	V
	Voltage accuracy	± 1	%
	Voltage ripple	< 3	%
	Nominal output power	0 – 200	W
	Max output power in AC (at steady state)	200	W
	Galvanic isolation	SELV	
ENVIRONMENTAL	Dimming interface	DALI 2.0 0-10V / 1/10V PWM	
	Dimming range	1 – 100 10 – 100	%
	Dimming method	PWM	
	TLA (Flicker and strobe effects)	$P_{ST} < 1$	
		$SVM < 0,4$	-
	Galvanic Isolation	Basic / Supplementary / Double	
	Ambient temperature range	-20...+50	°C
	Max. temperature at T_c test point	85	°C
	Max. case temperature in fault condition	110	°C
ENVIRONMENTAL	Storage temperature range	-25...+85	°C
	Permitted rel. humidity during operation	5 – 85	%
	Surge capability	1	kV
		2	
	Environmental rating	Indoor	
	IP protection class	IP 20	

Item	Value	Unit	Remarks
Mains switching cycles	> 150000	cycles	@ $t_a = 25^\circ\text{C}$
	50000	h	@ $t_c \text{ MAX}$ – failure rate max. 10%
	100000	h	@ $t_c \text{ MAX } -10^\circ\text{C}$ – failure rate max. 10%
	Yes		Auto recovery
	No		
	Yes		Auto recovery
	Yes		Auto recovery + Smart Power
	Yes		Auto recovery
DIMENSIONS	Height	30	mm
	Length	320	mm
	Width	60	mm
	Weight	460	g
	Mounting holes interaxis	282	mm
	Casing material	Plastic	
	Type of connection	Screw terminals	0,75 – 1,5 mm ²
	Wire preparation length	5...6	mm

Protection

Over temperature, Overload, Short-circuit, Output overvoltage. Reversible.

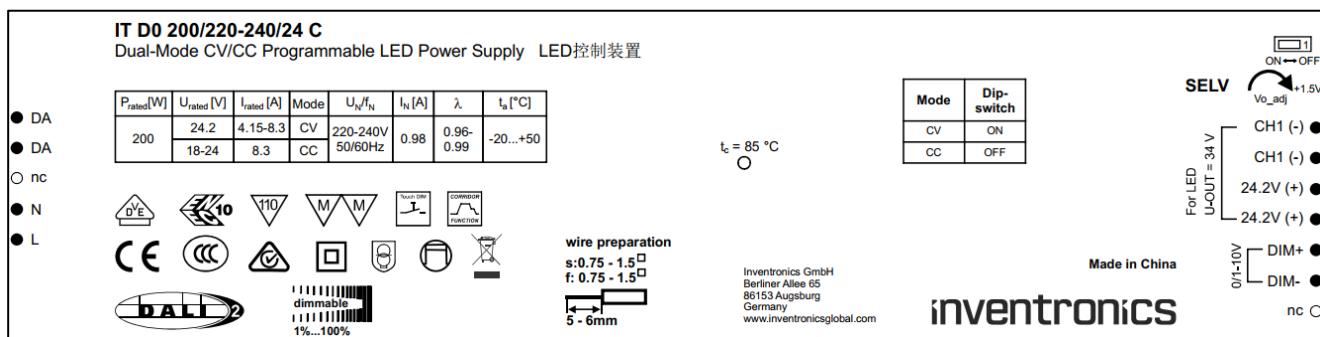

- Input wires cross section: 0,75 – 1,5 mm². Screwdriver: slotted 3.5 mm
- Output wires cross section 0,75 – 1,5 mm². Screwdriver: slotted 3.5 mm
- Wire peeling length: input 5...6 mm, output 5...6 mm

LED wire length


The wire length from the ECG to the LED module with verified EMI is less than 3 m.

Wiring longer than 3 m from ECG to LED module is possible, but site installation conditions may interfere with EMI with these longer cables. EMI is therefore not verified in this condition.

For longer lengths than 3 m, appropriate cable cross section must be carefully selected to reduce voltage drop.

Touch DIM

This driver supports Touch DIM operation, which enables an easy control of light by means of a push-button and additional Presence Sensors and/or Light Sensor directly connected to the DALI terminals. No further programming is necessary, unless additional functions are to be implemented, like Corridor Function, fading time, dimming limit levels and so on. For these additional features, the Tuner for Tronic (T4T) is suggested as a convenient tool. For more information, please refer to Inventronics on-line documentation like application guides.

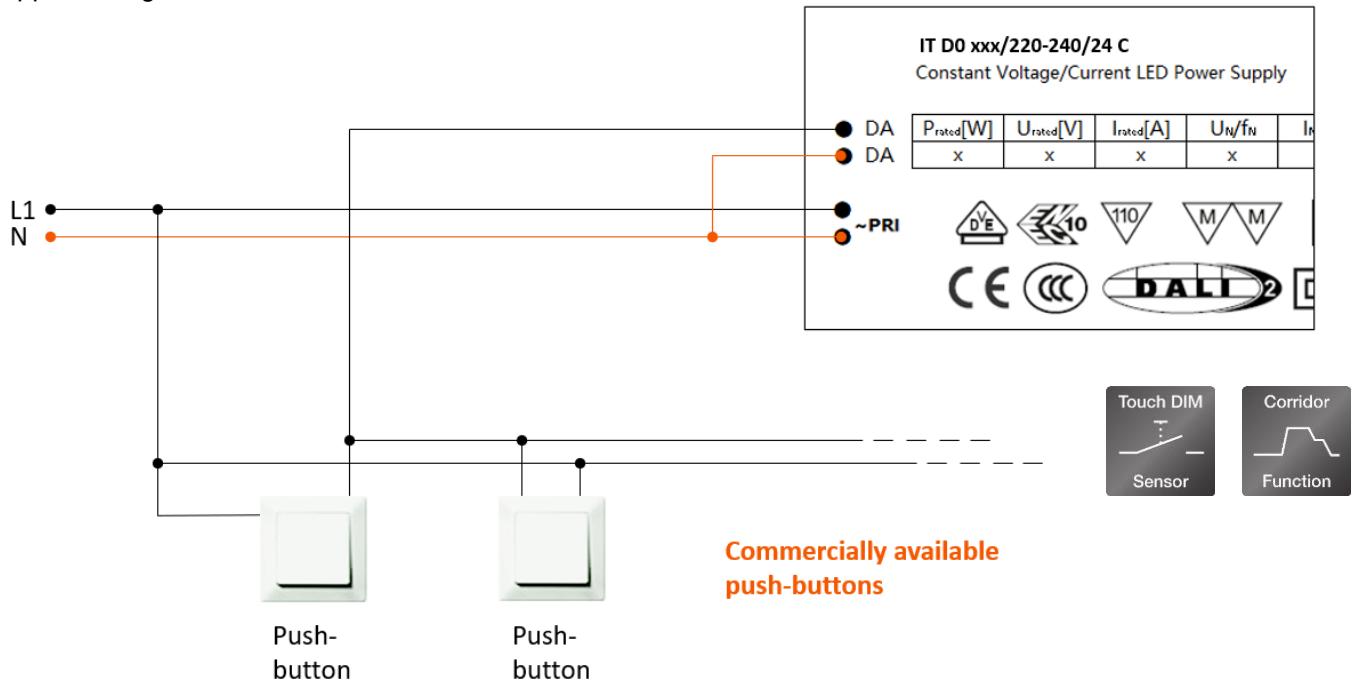

ADDITIONAL INFORMATION

- The Touch DIM input voltage ranges from 10 Vac to 264 Vac and has single insulation from mains.
- DALI and Touch DIM must never be used at the same time: control is achieved either with DALI controller or with the Touch DIM function (self-recognized and stored at the first Long Press following 5 s without DALI frames after last turn-on or previously programmed via DALI).
- Up to 20 ECGs can be controlled via direct push-button use. The number of push-buttons is limited by the sum of the overall cable length between switch(es) and the connected ECGs: maximum length should not exceed 25 m. In case of longer distances, a small 12 V transformer (AC buttons only) or a DALI repeater must be used to overcome line capacitance.

CV and CC mode

The ECG can operate in either constant voltage or constant current mode by changing the setting of the DIP-switch. Operation compatibility table:

DIMMING MODE (T4T)					
Operating Mode (DIP-Switch)	DIP-Switch PIN 1	Touch-DIM	DALI	0-10V/ PWM/R	1-10V/ PWM/R
CV MODE	ON	Yes	Yes	Yes *	Yes
CC MODE	OFF	Yes	Yes	Yes	Yes

*: default factory mode

CC MODE: 10...100% of maximum output current DIP-switch setting: 0

CV MODE: 1...100% PWM duty cycle output DIP-switch setting: 1

0-10V/PWM/R Dimming

For single port:

Sink current $\leq 50 \mu\text{A}$

Source current = $260 \mu\text{A} \pm 10\%$

Signal requirement:

0-10V $9\text{V} < V_{\text{max}} < 11\text{V}$

PWM $V_{\text{low}} < 0.3\text{V}$, $9.5\text{V} < V_{\text{high}} < 10.5\text{V}$, frequency $1\text{~}10\text{KHz}$, min duty $> 10\%$

Resistor recommended using a 39 kOhm potentiometer to achieve full-range dimming

0-10V Dimming curve at CC mode (fig.1):

Only CH1 supports CC mode,
please connect dimming signal to DIM1+.

$V_{\text{off}} = 0.8\text{V}$

$V_{\text{on}} = 1.0\text{V}$

$V_{\text{control_Lo}} = 1.2\text{V}$

$V_{\text{control_Hi}} = 9.0\text{V}$

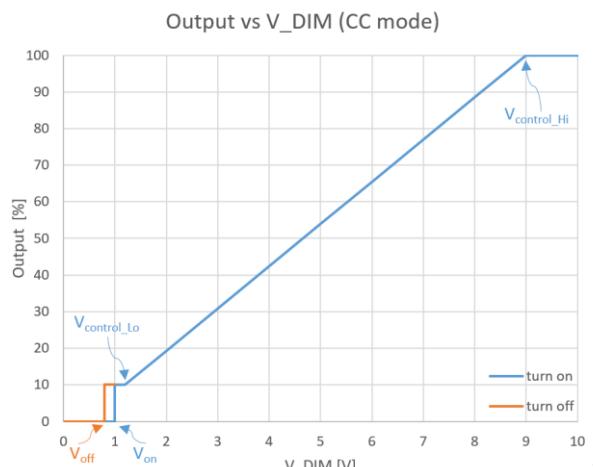


fig.1

0-10V Dimming curve at CV mode (fig.2):

$V_{\text{off}} = 0.8\text{V}$

$V_{\text{on}} = 1.0\text{V}$

$V_{\text{control_Lo}} = 1.2\text{V}$

$V_{\text{control_Hi}} = 9.0\text{V}$


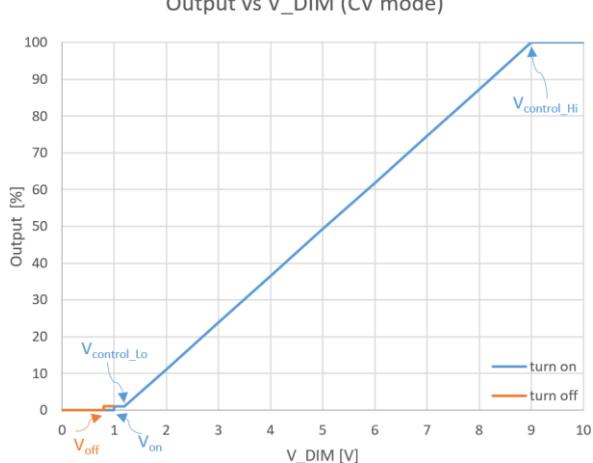


fig.2

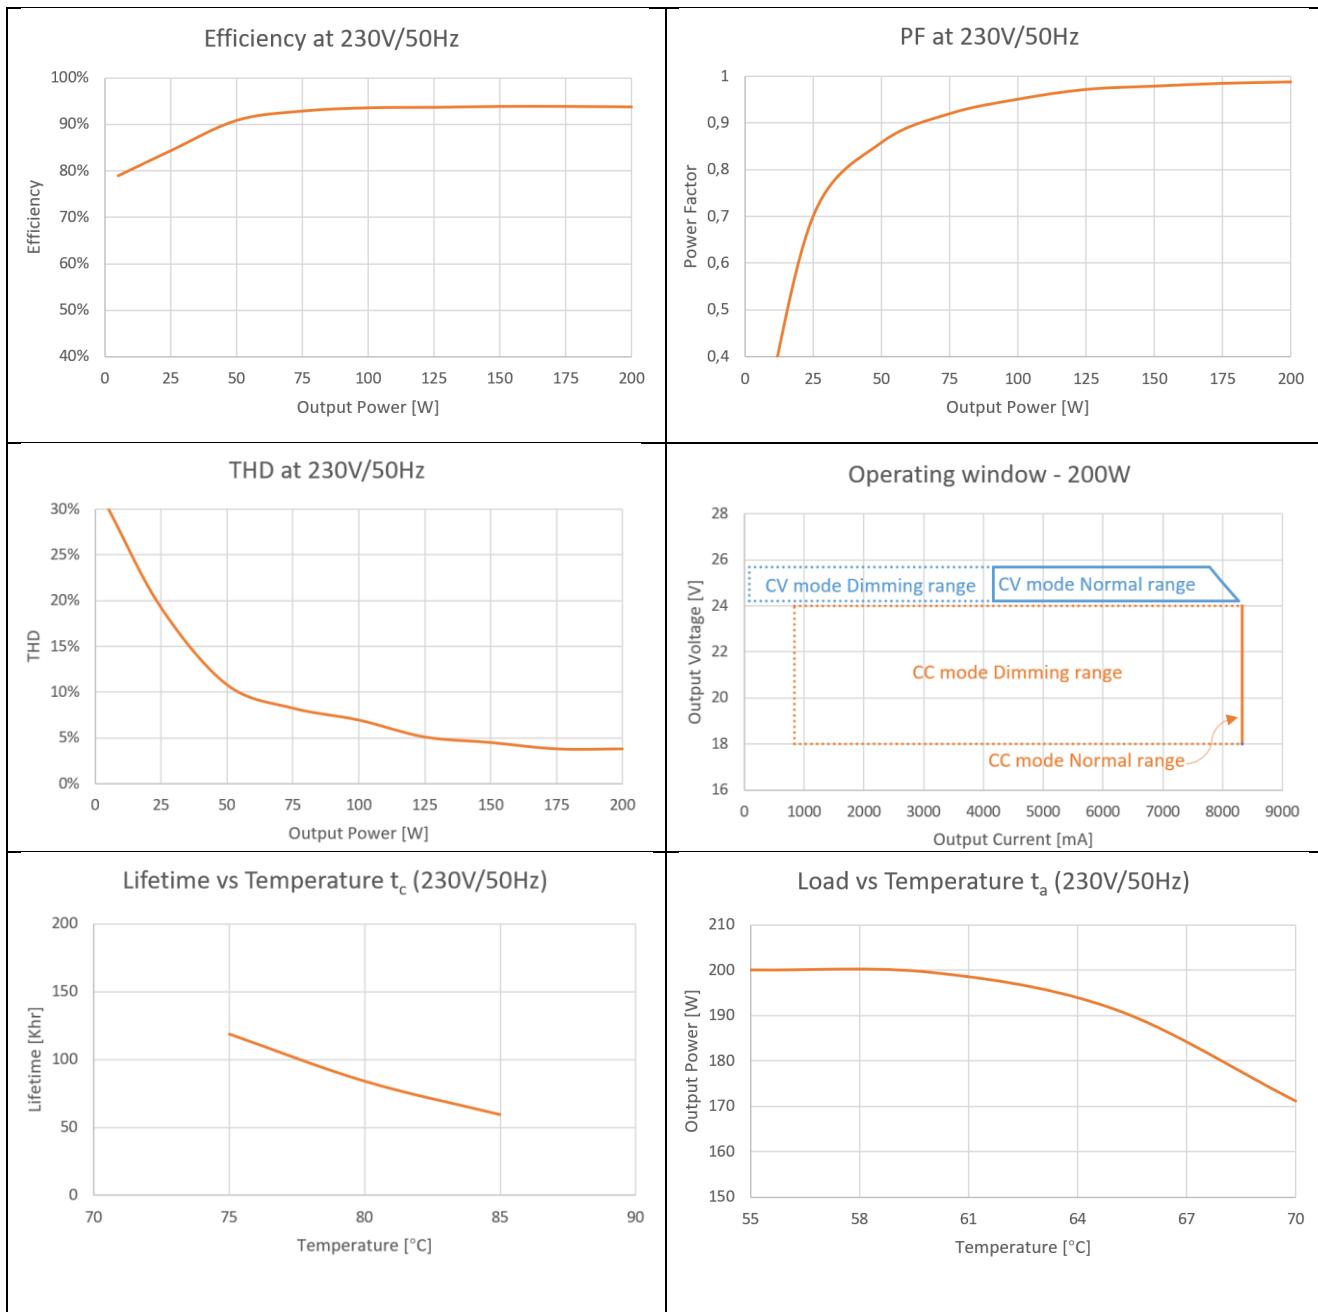

Remarks

- **Product performances below minimal load condition:** the output power is still generated if the load is below the minimum output power of 100 W, without any safety risk, but performances regarding THD, PF, etc. are not guaranteed. See typical operation window graph for details.
- **Output terminals:** the positive terminals are tied together.
- **Output short circuit protection:** the short circuit current is limited without damaging the unit. The short circuit protection is self-restoring.
- **Output overload protection:** in case of overload (< 155%), the device automatically dims down the output to keep the power within 200 W and let the LED load warm-up. When the overload exceeds the 155% of maximum nominal output power, the LED load will blink to manifest a fault condition and latch.
- **Input over voltage protection:** the ECG is capable of having input of max 320Vac for 2 hours without operation.
- **Lamp failure detection:** the minimum load that doesn't trigger open circuit detection is 3 W.
- **No load operation:** do not put a switch between ECG and load.
- **Over temperature protection:** the driver is protected against temporary overheating, so it automatically dims down when t_c is exceeded, and eventually turns off. The protection is self-restoring.
- **Ecodesign regulation information:**
Intended for use with LED modules. Separated control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centers and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Standards

EN IEC 55015
 EN IEC 61347-1
 EN IEC 61347-2-13
 EN IEC 61547
 EN IEC 61000-3-2
 EN 61000-3-3
 EN IEC 62384

Ordering information

Product name	EAN 10	EAN 40	Pieces / Box
IT D0 200/220-240/24 C	6937186142276	6937186142283	20

Controlgear type	Marking
Independent	
Safety isolating controlgear: SELV output with Short-circuit proof	

Inventronics GmbH

Head Office:
Parkring 31-33
86574 Garching, Germany
Phone +49 89 6213-0
www.inventronicsglobal.com

inventronics
OSRAM Digital System is now Inventronics