

## ▶ APAC Region

### Inventronics Hangzhou - Headquarters

Inventronics Science and Technology Park, #459 Jianghong Road, Binjiang District, Hangzhou, Zhejiang, China, 310052  
Tel: +86-571-56565800  
E-mail: sales@inventronicsglobal.com

### Inventronics Shenzhen

2F,Block B,Jianxing Technology Building,No.3151 Shahe West Road,Nanshan District, Shenzhen, China  
Tel: +86-571-56565800  
E-mail: sales@inventronicsglobal.com

### Inventronics Japan Office

Regus Business Center, Shin Kokusai Building 8F, 3-4-1 Marunouchi, Chiyoda-Ku, Japan 100-0005  
Tel: +81-9055297496  
E-mail: jp-sales@inventronicsglobal.com

### Inventronics Indonesia Office

JB Tower 10th floor  
Jl. Kebon Sirih no. 48-50 Gambir, Jakarta, 10110, Indonesia  
Tel: +62 21 5095 8096  
Email: id-sales@inventronicsglobal.com

### Inventronics Singapore Office

7 Holland Village Way,  
Lobby B, #05-03 / 04 / 05,  
Singapore 275748  
Tel: +65 9337 5247  
E-mail: sg-sales@inventronicsglobal.com

### Inventronics Guangzhou

Room 1105-1107, Clifford Corporate Center Building  
No. 15, Fuhua Road, Clifford Estate 511496 Panyu,  
Guangzhou City, Guangdong Province, China  
E-mail: ds\_mktg@inventronicsglobal.com

### Inventronics (Hong Kong) Limited

E-mail: sales@inventronicsglobal.com

### Inventronics Korea Inc.

Suite-615, 501, Teheran-ro, Gangnam-gu, Seoul,  
Republic of Korea (06168) (V-flex)  
Email: kr-sales@inventronicsglobal.com

### Inventronics Thailand Office

E-mail: th-sales@inventronicsglobal.com

### Inventronics Vietnam Office

E-mail: vn-sales@inventronicsglobal.com

### Inventronics Malaysia Sdn. Bhd.

Level 4, Uptown 7, Jalan SS21/39, Damansara Utama,  
47400 Petaling Jaya, Selangor, Malaysia  
Tel: +6012 398 1085  
E-mail: my-sales@inventronicsglobal.com

### Inventronics Australia Office

NSW, Australia  
E-mail: anz-sales@inventronicsglobal.com

## ▶ Europe Region

### Inventronics Netherlands

Polluxstraat 21, 5047 RA Tilburg, The Netherlands  
Tel: +31-857-470-061  
Email: eu-sales@inventronicsglobal.com

### Inventronics Italy

Via Castagnole 65/A, 31100 Treviso, Italy  
Email: support@inventronicsglobal.com

### Inventronics Germany

Parking 31-33, 85748 Garching, Germany  
Email: support@inventronicsglobal.com

### Inventronics France

18 Rue Gaston Romazzotti, 67120 Molsheim, France  
Tel: +33 3 68 41 88 99  
Email: support@inventronicsglobal.com

## ▶ India Region

### Inventronics India

**Head Office:** 4th & 5th Floor, B-Wing, Skyheights, Valipeer Road, Kalyan (west), Pin Code-421301  
**Factory:** Survey No.15, All India Logistics Park, Janval Village, Lonad Village Road, Taluka- Bhiwandi -421 302-Thane  
Tel: +91-9845054416  
E-mail: in-sales@inventronicsglobal.com

## ▶ MEA Region

### Inventronics UAE

#405 E wing HQ Building, DSO, Dubai, UAE  
E-mail: support@inventronicsglobal.com

## ▶ Americas Region

### Inventronics USA

2825 S Tulsa Ave. Oklahoma City, OK 73108 USA  
Tel: +1-405-600-7480  
E-mail: usa-sales@inventronicsglobal.com

### Inventronics Mexico

Carretera San Martín de las Flores #520  
Building 8A Parque Industrial Prologis El Salto  
San Pedro Tlaquepaque, Jalisco, Mexico  
Tel: +521 3338634039  
E-mail: usa-sales@inventronicsglobal.com

### Inventronics Brazil

Barueri/SP, Brazil  
Tel: +55(11)2680-8310  
E-mail: usa-sales@inventronicsglobal.com



Scan this QR code for more regional sales contacts.




inventronicsglobal.com

# inventronics

## Architectural Lighting - Constant Voltage Driver



Architectural

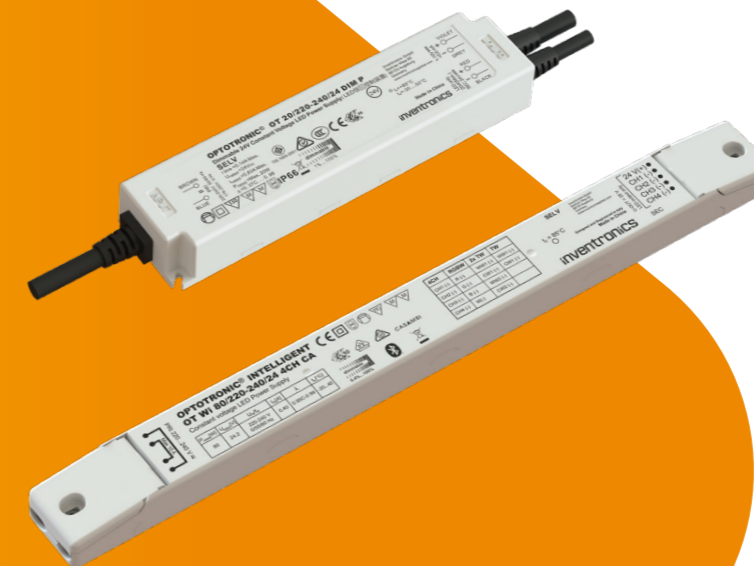

📍 Raffles London at The OWO



Selection Guide

2026 H1

# Architectural Lighting

Experience the ultimate in world-class quality with our portfolio — enabling you to specify with unwavering confidence and peace of mind.

## Expertise

Our lighting systems are designed to support unique and long-lasting lighting experiences



Flexible and changeable



Dynamic regulation




Durable and long-lasting


## System Value

- Highest optical uniformity with outstanding stability over time of color coordinates & luminous flux levels
- Complete, tested, and guaranteed interoperable components to build any seamless curvilinear lighting systems.
- Extended installation possibilities, with the LED driver up to 50m away from the LED module ensuring full dimming functionality, with accurate dimming down to 0.1%.
- Our lighting systems can create the most precise smart light effects, thanks to a state-of-the-art set of controllable devices, including both wired and wireless controls and sensors.
- Our global technical service ensures the necessary on-site support for your lighting project, including component customization.

## Lighting System Solutions

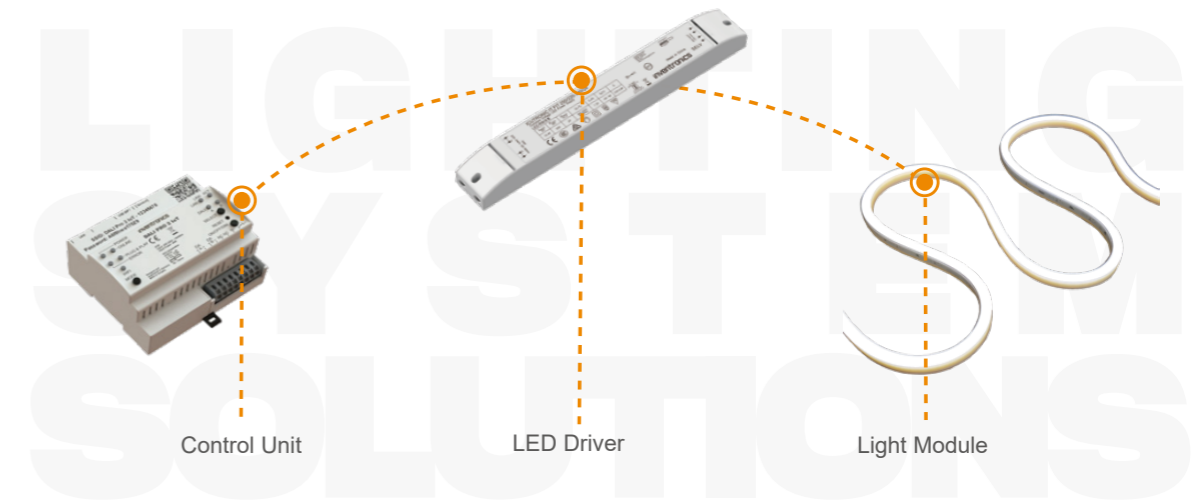

## Sub-applications

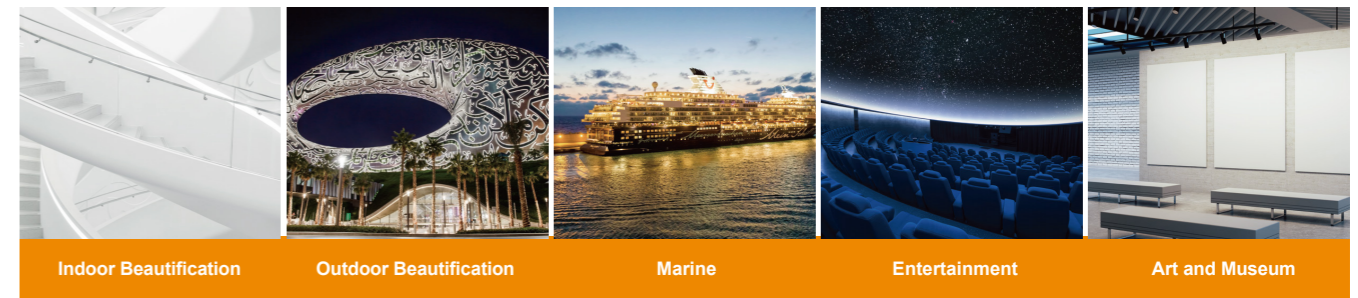





OT WI



OTI DALI



IT DIM



OT FIT PC


Product Family	Product Name	EAN10	Isolation	Dimming Interface	Touch DIM	Programming Interface	Input Voltage AC	Input Voltage DC	Output Power	Output Voltage	Power Factor [λ]	Efficiency (max) [%]	Ripple (100 Hz) [%]	Lifetime [h]	Ambient Temperature Range [°C]	Max Tc [°C]	Protection Class	IP Rating	Length [mm]	Width [mm]	Height [mm]	Certificates & Approbations	Standard pack [pcs.]
OT WI	OT Wi 50/220-240/24 1CH NLC	6937186131874	SELV	Bluetooth NLC	No	n/a	198...264 V	176...276 V	0...50 W	24.2 V	0.82...0.99	92	< 1	50k h / Tc MAX	-20...+45	70	I, II	IP20	346	32	22	CE, VDE-ENEC, MM, RCM	20
	OT Wi 80/220-240/24 1CH NLC	6937186131898	SELV	Bluetooth NLC	No	n/a	198...264 V	176...276 V	0...80 W	24.2 V	0.95...0.99	93	< 1	50k h / Tc MAX	-20...+45	85	I, II	IP20	346	32	22	CE, VDE-ENEC, MM, RCM	20
	OT Wi 160/220-240/24 1CH NLC	6937186131911	SELV	Bluetooth NLC	No	n/a	198...264 V	176...276 V	0...160 W	24.2 V	0.98...0.99	93	< 1	50k h / Tc MAX	-20...+45	90	I, II	IP20	300	50	35	CE, VDE-ENEC, MM, RCM	20
	OT Wi 50/220-240/24 4CH CA	6937186115195	SELV	Bluetooth CASAMBI	No	CASAMBI	198...264 V	176...276 V	0...50 W	24.2 V	0.82C...0.99	92	< 1	50k h / Tc MAX	-20...+45	70	I, II	IP20	346	32	22	CE, ENEC 10, UKCA, RCM, VDE, VDE-ENEC	20
	OT Wi 80/220-240/24 4CH CA	6937186115171	SELV	Bluetooth CASAMBI	No	CASAMBI	198...264 V	176...276 V	0...80 W	24.2 V	0.95...0.99	93	< 1	50k h / Tc MAX	-20...+45	85	I, II	IP20	346	32	22	CE, ENEC 10, UKCA, RCM, VDE, VDE-ENEC	20
	OT Wi 160/220-240/24 2CH CA	6937186115218	SELV	Bluetooth CASAMBI	No	CASAMBI	198...264 V	176...276 V	0...160 W	24.2 V	0.92C...0.99	93	< 1	50k h / Tc MAX	-20...+45	90	I, II	IP20	300	50	32	CE, ENEC 10, UKCA, RCM, VDE, VDE-ENEC	20
OTI DALI	OTI DALI 30/220-240/24 1CH	6937186115119	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	30 W	24.2 V	0.32...0.95	88	< 1	50k h / Tc MAX	-20...+50	80	I, II	IP20	103	67	29.5	CE, CCC, BIS, ENEC, EL, ENEC 25, RCM, UKCA	30
	OTI DALI 50/220-240/24 1CH G3	6977770431881	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...50 W	24.2 V	0.82C...0.99	92	< 1	50k h / Tc MAX	-20...+45	70	I, II	IP20	346	32	22	CCC, EAC, EL, ENEC 10, RCM, VDE, BIS	20
	OTI DALI 80/220-240/24 1CH G3	6977770431867	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...80 W	24.2 V	0.89C...0.99	93	< 1	50k h / Tc MAX	-20...+45	85	I, II	IP20	346	32	22	CCC, EAC, EL, ENEC 10, RCM, VDE, BIS	20
	OTI DALI 160/220-240/24 1CH G3	6977770431904	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...160 W	24.2 V	0.92C...0.99	93	< 1	50k h / Tc MAX	-20...+45	90	I, II	IP20	300	50	35	CCC, EAC, EL, ENEC 10, RCM, VDE, BIS	20
	OTI DALI 50/220-240/24 4CH DT6/8 G3	6977770431966	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...50 W	24.2 V	0.82C...0.99	92	< 1	50k h / Tc MAX	-20...+45	70	I, II	IP20	346	32	22	CCC, EAC, EL, ENEC 10, RCM, VDE, BIS	20
	OTI DALI 80/220-240/24 4CH DT6/8 G3	6977770431942	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...80 W	24.2 V	0.89C...0.99	93	< 1	50k h / Tc MAX	-20...+45	85	I, II	IP20	346	32	22	CCC, EAC, EL, ENEC 10, RCM, VDE, BIS	20
	OTI DALI 160/220-240/24 2CH DT6/8 G3	6977770431928	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...160 W	24.2 V	0.92C...0.99	93	< 1	50k h / Tc MAX	-20...+45	90	I, II	IP20	300	50	35	CCC, EAC, EL, ENEC 10, RCM, VDE, BIS	20
	OTI DALI 50/220-240/48 1CH	6977770432451	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	195...264 V	176...276 V	0...50 W	48.2 V	0.82C...0.99	92	< 1	50k h / Tc MAX	-20...+50	80	I, III	IP20	346	32	22	CE, ENEC 10, VDE-ENEC, CCC, BIS, EL, MM, RCM	20
	OTI DALI 80/220-240/48 1CH	6977770432475	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...80 W	48.2 V	0.89C...0.99	93	< 1	50k h / Tc MAX	-20...+45	85	I, II	IP20	346	32	22	CE, CCC, BIS, ENEC, EL, MM, RCM, VDE-ENEC	20
OTI DALI 160/220-240/48 1CH	6977770432499	SELV	DALI-2, Corridor, Touch DIM	Yes	T4T	198...264 V	176...276 V	0...160 W	48.2 V	0.92C...0.99	95	< 1,5	50k h / Tc MAX	-20...+50	80	I, III	IP20	300	50	35	CE, ENEC 10, VDE-ENEC, CCC, BIS, EL, MM, RCM	20	
IT DIM	IT D0 36/220-240/24 C	6937186142214	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	36 W	24.2 V + 1,5 V	0.93C...0.99	87	< 3	50k h / Tc MAX	-25...+50	75	II	IP20	240	60	25	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 75/220-240/24 C	6937186142238	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	75 W	24.2 V + 1,5 V	0.93C...0.99	92	< 3	50k h / Tc MAX	-25...+50	80	II	IP20	275	60	25	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 150/220-240/24 C	6937186142252	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	150 W	24.2 V + 1,5 V	0.91C...0.99	93.5	< 3	50k h / Tc MAX	-25...+50	75	II	IP20	320	60	30	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 200/220-240/24 C	6937186142276	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	200 W	24.2 V + 1,5 V	0.96...0.99	93	< 3	50k h / Tc MAX	-25...+50	85	II	IP20	320	60	30	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 36/220-240/24/2C C TW	6937186142290	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	36 W	24.2 V + 1,5 V	0.93C...0.99	87	< 3	50k h / Tc MAX	-25...+50	75	II	IP20	240	60	25	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 75/220-240/24/2C C TW	6937186142313	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	75 W	24.2 V + 1,5 V	0.93C...0.99	92	< 3	50k h / Tc MAX	-25...+50	80	II	IP20	275	60	25	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 150/220-240/24/2C C TW	6937186142351	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	150 W	24.2 V + 1,5 V	0.91C...0.99	93.5	< 3	50k h / Tc MAX	-25...+50	75	II	IP20	320	60	30	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
	IT D0 200/220-240/24/2C C TW	6937186142337	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T	198...264 V	not relevant	200 W	24.2 V + 1,5 V	0.96...0.99	93	< 3	50k h / Tc MAX	-25...+50	85	II	IP20	320	60	30	CE, ENEC10-VDE, CCC, BIS, RCM, KC, MM	20
OT FIT PC	OT FIT 36/220-240/24 PC	6977770438460	SELV	Phase Cut	No	n/a	198...264 V	not relevant	24.2 V	2.42...36 W	0.45C...0.98	85	< 5	50k h / Tc MAX	-20...+50	80	I	IP20	103	67	29.5	CE, ENEC, CCC, RCM, UKCA, EAC, SELV, CB	30
	OT FIT 75/220-240/24 PC	6977770438484	SELV	Phase Cut	No	n/a	198...264 V	not relevant	24.2 V	24.2...75 W	0.95...0.98	92	< 5	50k h / Tc MAX	-20...+45	80	I	IP20	110	76	30	CE, ENEC, CCC, RCM, UKCA, EAC, SELV, CB	20
	OT FIT 150/220-240/24 PC	6977770438569	SELV	Phase Cut	No	n/a	198...264 V	not relevant	24.2 V	60.5...150 W	0.95...0.98	92	< 5	50k h / Tc MAX	-20...+45	80	I	IP20	170	76	30	CE, ENEC, CCC, RCM, UKCA, EAC, SELV, CB	10



OT SLIM



IT FIT



ELEMENT G2



Dimmers

Product Family	Product Name	EAN10	Isolation	Dimming Interface	Touch DIM	Program-ming Interface	Input Voltage AC	Input Voltage DC	Output Power	Output Voltage	Power Factor [λ]	Efficiency (max.) [%]	Ripple (100 Hz) [%]	Lifetime [h]	Ambient Temperature Range [°C]	Max Tc [°C]	Protection Class	IP Rating	Length [mm]	Width [mm]	Height [mm]	Certificates & Approbations	Standard pack [pcs.]
OT SLIM	OT SLIM 30/220-240/24	6977770438699	SELV	not relevant	No	n/a	195.5...276 V	176...250 V	30 W	24.2 V	0.95...0.98	86	< 5	50k h / Tc MAX	-25...+45	75	I, II	IP20	270	30	17.5	CE, CB, ENEC, CCC, EAC, RCM, BIS	50
	OT SLIM 60/220-240/24	6977770438712	SELV	not relevant	No	n/a	195.5...276 V	176...250 V	60 W	24.2 V	0.94C...0.98	88	< 5	50k h / Tc MAX	-25...+45	70	I, II	IP20	338	30	17.5	CE, CB, ENEC, CCC, EAC, RCM, BIS	30
	OT SLIM 100/220-240/24	6977770438736	SELV	not relevant	No	n/a	195.5...276 V	176...250 V	100 W	24.2 V	0.94C...0.95	91	< 5	50k h / Tc MAX	-25...+45	80	I, II	IP20	374	30	18.5	CE, CB, ENEC, CCC, EAC, RCM, BIS	30
	OT SLIM 160/220-240/24	6977770438750	SELV	not relevant	No	n/a	195.5...276 V	176...250 V	160 W	24.2 V	0.97...0.99	92	< 5	50k h / Tc MAX	-25...+45	75	I, II	IP20	404	30	21.5	CE, CB, ENEC, CCC, EAC, RCM, BIS	30
	OT SLIM 250/220-240/24	6977770438774	SELV	not relevant	No	n/a	195.5...276 V	176...250 V	250 W	24.2 V	0.95...0.98	92	< 5	50k h / Tc MAX	-25...+45	80	I, II	IP20	343	60	31	CE, CB, ENEC, CCC, EAC, RCM, BIS	10
IT FIT	IT FIT 30/220-240/24	6937186142672	SELV	not relevant	No	n/a	198...264 V	not relevant	30 W	24 V	0.90C...0.98	87	< 3	50k h / Tc MAX	-20...+50	80	I, II	IP20	170	40	30	CE, CCC, RCM, MM	50
	IT FIT 60/220-240/24	6937186142696	SELV	not relevant	No	n/a	198...264 V	not relevant	60 W	24 V	0.92C...0.98	89	< 3	50k h / Tc MAX	-20...+50	85	I, II	IP20	224	40	30	CE, CCC, RCM, MM	30
	IT FIT 120/220-240/24	6937186142610	SELV	not relevant	No	n/a	198...264 V	not relevant	120 W	24 V	0.94C...0.98	90	< 3	50k h / Tc MAX	-20...+50	90	I, II	IP20	284	40	30	CE, CCC, RCM, MM	30
	IT FIT 180/220-240/24	6937186142634	SELV	not relevant	No	n/a	198...264 V	not relevant	180 W	24 V	0.94C...0.98	92	< 3	50k h / Tc MAX	-20...+50	90	I, II	IP20	324	40	30	CE, CCC, RCM	20
	IT FIT 250/220-240/24	6937186142658	SELV	not relevant	No	n/a	198...264 V	not relevant	250 W	24 V	0.97...0.99	93	< 3	50k h / Tc MAX	-20...+50	90	I, II	IP20	375	50	35	CE, CCC, RCM	10
ELEMENT G2	ELEMENT 30/220-240/12 G2	6937186161819	SELV	not relevant	No	n/a	198...264 V	not relevant	30 W	12.5 V	> 0.95	86	< 3	30k h / Tc MAX	-20...+50	75	I, II	IP20	145	40	26.5	CE, CCC, MM, RCM, UKCA, BIS	40
	ELEMENT 60/220-240/12 G2	6937186161857	SELV	not relevant	No	n/a	198...264 V	not relevant	60 W	12.5 V	> 0.95	88	< 3	30k h / Tc MAX	-20...+50	85	I, II	IP20	200	40	31	CE, CCC, MM, RCM, UKCA, BIS	30
	ELEMENT 120/220-240/12 G2	6937186161895	SELV	not relevant	No	n/a	198...264 V	not relevant	120 W	12.5 V	> 0.95	89	< 3	30k h / Tc MAX	-20...+50	90	I, II	IP20	260	40	31	CE, CCC, MM, RCM, UKCA, BIS	20
	ELEMENT 180/220-240/12 G2	6937186161932	SELV	not relevant	No	n/a	198...264 V	not relevant	180 W	12.5 V	> 0.95	91	< 3	30k h / Tc MAX	-20...+50	90	I, II	IP20	300	40	31	CE, CCC, MM, RCM, UKCA, BIS	20
	ELEMENT 30/220-240/24 G2	6937186161833	SELV	not relevant	No	n/a	198...264 V	not relevant	30 W	24 V	0.97...0.99	86	< 3	30k h / Tc MAX	-20...+50	75	I, II	IP20	145	40	26.5	CE, RCM, CCC, MM	40
	ELEMENT 60/220-240/24 G2	6937186161871	SELV	not relevant	No	n/a	198...264 V	not relevant	60 W	24 V	0.94C...0.99	88	< 3	30k h / Tc MAX	-20...+50	85	I, II	IP20	200	40	31	CE, RCM, CCC, MM	30
	ELEMENT 120/220-240/24 G2	6937186161918	SELV	not relevant	No	n/a	198...264 V	not relevant	120 W	24 V	0.98...0.99	89	< 3	30k h / Tc MAX	-20...+50	90	I, II	IP20	260	40	31	CE, RCM, CCC, MM	20
	ELEMENT 180/220-240/24 G2	6937186161956	SELV	not relevant	No	n/a	198...264 V	not relevant	180 W	24 V	0.97...0.99	91	< 3	30k h / Tc MAX	-20...+50	90	I, II	IP20	300	40	31	CE, RCM, CCC	20
ELEMENT 250/220-240/24 G2	6937186161970	SELV	not relevant	No	n/a	198...264 V	not relevant	250 W	24 V	> 0.95	92	< 3	30k h / Tc MAX	-20...+50	90	I, II	IP20	375	50	35	CE, RCM, CCC	10	
Dimmers	IT D0P/12-48V/4C NFC L C RGBW	6937186134127	SELV	DALI-2, 0-10V, 1-10V, PWM, RES	No	T4T + NFC	not relevant	11...54	480 W	12...48 V	n.a.	n.a.	n.a.	50k h / Tc MAX	-25...+50	65	II	IP20	195	51	20	CE, ENEC, UL, FCC, BIS, RCM, MM	20
	OT Wi DIM 12-48 5CH CA	6937186115232	SELV	Bluetooth CASAMBI	No	CASAMBI	not relevant	11...54	576 W	12...48 V	n.a.	n.a.	n.a.	50k h / Tc MAX	-10...+50	75	III	IP20	186.2	28.8	21	CE	20
	OT DMX DIM 5CH	6977078993838	SELV	DMX512	No	DMX - RDM	not relevant	11...54	576 W	12...48 V	n.a.	n.a.	n.a.	50k h / Tc MAX	-10...+50	90	III	IP20	186.2	28.8	21	CE	20




OTI DALI



IT DIM



OT DIM



OT FIT



OT

Product Family	Product Name	EAN10	Isolation	Dimming Method	Touch DIM	Program- ming Interface	Input Voltage AC	Input Voltage DC	Output Power	Output Voltage	Power Factor [λ]	Efficiency (max.) [%]	Ripple (100 Hz) [%]	Lifetime [h]	Ambient Temperature Range [°C]	Max Tc [°C]	Prote- ction Class	IP Rating	Length [mm]	Width [mm]	Height [mm]	Certificates & Approbations	Standard pack [pcs.]
OTI DALI	OTI DALI 100/220-240/244CHDT6/8 P	6937186115157	SELV	DALI-2, AstroDIM	No	T4T	198...264 V	176...276 V	0...100 W	24.7 V	0.95...0.99	93	< 1,5	50k h / Tc MAX	-30...+55	75	I	IP66/IP67	237	80	40	ENEC 10, RCM, VDE, UKCA, EL, MM	6
	OTI DALI 210/220-240/244CHDT6/8 P	6937186115133	SELV	DALI-2, AstroDIM	No	T4T	198...264 V	176...276 V	0...210 W	24.7 V	0.95...0.99	93	< 1,5	50k h / Tc MAX	-30...+55	80	I	IP66/IP67	330	80	47	ENEC 10, RCM, VDE, UKCA, EL, MM	6
IT DIM	IT D0P 36/100-277/24 2CH P67 G	6937186176721	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	36 W	24.2 V + 1,5 V	0.73C...0.99	86	< 3	50k h / Tc MAX - 5°C	-30...+60	85	I	IP66/IP67	211	60	35	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	15
	IT D0P 75/100-277/24 2CH P67 G	6937186176745	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	75 W	24.2 V + 1,5 V	0.70C...0.99	89	< 3	50k h / Tc MAX - 5°C	-30...+60	85	I	IP66/IP67	206	60	43	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	15
	IT D0P 100/100-277/24 2CH P67 G	6937186176769	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	100 W	24.2 V + 1,5 V	0.84C...0.99	90	< 3	50k h / Tc MAX - 5°C	-30...+60	85	I	IP66/IP67	216	60	43	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	15
	IT D0P 150/100-277/24 2CH P67 G	6937186176783	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	150 W	24.2 V + 1,5 V	0.85C...0.99	92	< 3	50k h / Tc MAX - 5°C	-30...+55	90	I	IP66/IP67	231	60	43	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	15
	IT D0P 250/100-277/24 2CH P67 G	6937186176806	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	250 W	24.2 V + 1,5 V	0.80C...0.99	92	< 3	50k h / Tc MAX - 5°C	-30...+50	90	I	IP66/IP67	263	70	47	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	9
	IT D0P 350/100-277/24 2CH P67 G	6937186176820	SELV	DALI-2, 0-10V, 1-10V, PWM	No	T4T	90...305 V	not relevant	350 W	24.2 V + 1,5 V	0.73C...0.99	92	< 3	50k h / Tc MAX - 5°C	-30...+50	90	I	IP66/IP67	265	92	53	CE, CCC, ENEC10-VDE, PSE, BIS, RCM, KC, MM	9
OT DIM	OT 20/220-240/24 DIM P	6977770438347	SELV	1...10 V	No	n/a	198...264 V	176...276 V	20 W	24.2 V	0.95	83	< 10	50k h / Tc MAX	-30...+55	85	II	IP66	178	43	25	ENEC, RCM, CCC, EAC	20
	OT 40/220-240/24 DIM P	6977770438361	SELV	1...10 V	No	n/a	198...264 V	176...276 V	40 W	24.2 V	0.95	85	< 10	50k h / Tc MAX	-30...+55	90	II	IP66	208	43	26	ENEC, RCM, CCC, EAC	20
	OT 60/220-240/24 DIM P	6977770438385	SELV	1...10 V	No	n/a	198...264 V	176...276 V	60 W	24.2 V	0.95	87	< 10	50k h / Tc MAX	-30...+55	90	II	IP66	208	43	26	ENEC, RCM, CCC, EAC	20
	OT 100/220-240/24 DIM P	6977770438408	SELV	1...10 V	No	n/a	198...264 V	176...276 V	100 W	24.2 V	0.95	90	< 1,5	50k h / Tc MAX	-30...+55	80	I	IP66/IP67	240	50	34	ENEC, RCM, CCC, EAC	10
	OT 130/220-240/24 DIM P	6977770438422	SELV	1...10 V	No	n/a	198...264 V	176...276 V	130 W	24.2 V	0.95	90.5	< 1,5	50k h / Tc MAX	-30...+55	80	I	IP66/IP67	220	63	37	ENEC, RCM, CCC, EAC	10
	OT 250/220-240/24 DIM P	6977770438446	SELV	1...10 V	No	n/a	198...264 V	176...276 V	250 W	24.2 V	0.95	92	< 1,5	50k h / Tc MAX	-30...+55	85	I	IP66/IP67	265	68	40	ENEC, RCM, CCC, EAC	10
OT FIT	OT FIT 30/220-240/12 P	6977770438675	SELV	not relevant	No	n/a	198...264 V	not relevant	30 W	12 V	0.80C...0.95	84	< 5	50k h / Tc MAX	-25...+55	80	I	IP67	186	35	20.5	CE, VDE-ENEC, UKCA	50
	OT FIT 60/220-240/12 P	6977770438613	SELV	not relevant	No	n/a	198...264 V	not relevant	60 W	12.5 V	0.90C...0.96	87	< 3	50k h / Tc MAX	-40...+50	80	I	IP66/IP67	157	53	31.5	CE, CCC, ENEC, TISI, RCM	15
	OT FIT 150/220-240/12 P	6977770438637	SELV	not relevant	No	n/a	198...264 V	not relevant	150 W	12.5 V	0.93C...0.98	91	< 3	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	202	53	31.5	CE, CCC, ENEC, TISI, RCM	15
	OT FIT 300/220-240/12 P	6977770438651	SELV	not relevant	No	n/a	198...264 V	not relevant	300 W	12.5 V	0.95...0.99	91	< 3	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	266	83	39.5	CE, CCC, ENEC, TISI, RCM	10
	OT FIT 80/220-240/24 P	6937186115034	SELV	not relevant	No	n/a	198...264 V	not relevant	40...80 W	24 V	0.86C...0.97	88.5	< 2	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	170	53	31.5	CE, CCC, TISI, RCM	15
	OT FIT 150/220-240/24 P	6937186115058	SELV	not relevant	No	n/a	198...264 V	not relevant	75...150 W	24 V	0.90C...0.98	92	< 2	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	240	53	31.5	CE, CCC, TISI, RCM	15
	OT FIT 200/220-240/24 P	6937186115072	SELV	not relevant	No	n/a	198...264 V	not relevant	100...200 W	24 V	0.93C...0.98	93	< 2	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	215	53	31.5	CE, CCC, TISI, RCM	15
OT FIT 300/220-240/24 P	6937186115096	SELV	not relevant	No	n/a	198...264 V	not relevant	150...300 W	24 V	0.95...0.99	93	< 2	50k h / Tc MAX	-40...+50	90	I	IP66/IP67	260	68	39.6	CE, CCC, TISI, RCM	10	
OT	OT 20/220-240/24 P	6937186114914	SELV	not relevant	No	n/a	198...264 V	176...250 V	20 W	24.2 V	0.95	83	< 10	50k h / Tc MAX	-30...+55	85	II	IP66	178	43	25	CE, CCC, ENEC, RCM, EAC	20
	OT 40/220-240/24 P	6937186114938	SELV	not relevant	No	n/a	198...264 V	176...250 V	40 W	24.2 V	0.95	85	< 10	50k h / Tc MAX	-30...+55	90	II	IP66	208	43	26	CE, CCC, ENEC, RCM, EAC	20
	OT 60/220-240/24 P	6937186114952	SELV	not relevant	No	n/a	198...264 V	176...250 V	60 W	24.2 V	0.95	87	< 10	50k h / Tc MAX	-30...+50	90	II	IP66	208	43	26	CE, CCC, ENEC, RCM, EAC	20
	OT 100/220-240/24 P	6937186114976	SELV	not relevant	No	n/a	198...264 V	176...250 V	100 W	24.2 V	0.95	90	< 1,5	50k h / Tc MAX	-30...+55	80	I	IP66/IP67	240	50	34	CE, CCC, ENEC, RCM, EAC	10
	OT 130/220-240/24 P	6937186114990	SELV	not relevant	No	n/a	198...264 V	176...250 V	130 W	24.2 V	0.95	90.5	< 1,5	50k h / Tc MAX	-30...+55	80	I	IP66/IP67	220	63	37	CE, CCC, ENEC, RCM, EAC	10
	OT 250/220-240/24 P	6937186115010	SELV	not relevant	No	n/a	198...264 V	176...250 V	250 W	24.2 V	0.95	92	< 1,5	50k h / Tc MAX	-30...+55	85	I	IP66/IP67	265	68	40	CE, CCC, ENEC, RCM, EAC	10