



Lighting Systems

- Architectural Lighting
- Signage and Non-Lighting



About Inventronics	01
Lighting system solutions-Architectural	03
Lighting system solutions-Signage & Non-lighting	09

01 Light Modules & Accessories

1.1 Flexible	LINEARlight FLEX Infinite IP00	13
	LINEARlight FLEX Infinite Protect	14
	LINEARlight FLEX Uniformity	15
	Tec FLEX NeoGen	16
	Tec FLEX NeoGen Shortpitch	17
	BASIC FLEX Shortpitch	18
	LINEARlight FLEX Colormix	19
	LINEARlight FLEX Tunable White IP00	20
	LINEARlight FLEX Tunable White Protect	21
	LINEARlight FLEX Diffuse TOP	22
	LINEARlight FLEX Diffuse SIDE	23
	TEC FLEX DIFFUSE RGBW addressable TOP	24
	TEC FLEX DIFFUSE RGBW addressable SIDE	25
1.2 Signage	BackLED CP 24V	26
	BackLED Tunable White CP G5	27
	BackLED Area Tunable White	28
	BackLED CB G2 24V	29
	BackLED RGBW G3/DMX	31
	BackLED CX G6	32

02 LED Driver & Accessories

2.1 Outdoor

Connected - Constant Voltage	OTi DALI 24V 4CH P	33
Simple DIM - Constant Voltage	IT D0P 24V 2CH P67	34
Non Dimmable - Constant Voltage	OT 24V P	35
	OT FIT 24V P	36
	OT FIT 12V P	37

2.2 Indoor		
<hr/>		
Connected - Constant Voltage	IT D0 24V 1CH-2CH	38
	OTi DALI 48V 1CH	40
	OT Wi 24V CA	41
	OTi DALI 24V	42
<hr/>		
Simple DIM - Constant Voltage	OT DMX DIM 5CH	44
	OT PC 24V	45
	IT D0P 12-48V	46
<hr/>		
Non Dimmable - Constant Voltage	IT FIT 24V	47
	OT SLIM 24V	49
<hr/>		

03 Controls, Sensors, Programming Tools & Accessories

3.1 DALI	DALI PRO 2 IoT	50
	DALI MCU TW G2	51
	DALI-2 REP LI	52
<hr/>		
3.2 Software	Tuner4TRONIC	53
	DALI PRO PC TOOL	53
	DALI PRO CONTROL	53
	DALI Wizard	53
	BT Config	53
	BT CONTROL	53
<hr/>		
3.3 Programming Tools	DALI magic	54
<hr/>		

inventronics

About Inventronics

Building a Brighter Future

Inventronics is a premier worldwide provider of lighting systems & solutions, building on decades of expertise in LED drivers, sensors, control systems, and LED modules. Their integrated, cutting-edge solutions are designed to simplify system design, enhance performance, and ensure long-term reliability across a wide range of lighting applications—while meeting all major international safety and performance standards.

The acquisition of the Business Unit Digital Systems in Asia and Europe from OSRAM GmbH in 2023, strengthens and enhances Inventronics portfolio, capabilities, and global presence, making us the first choice for LED lighting system solutions to customers.



4
Own production sites
on three continents



4
R&D centers



15
Warehouses



100+
Countries products are sold



2000+
Employees



4000+
Standard lighting products

Why Choose Us?



A Broad Portfolio Of Dependable Products

You benefit from industry-leading comprehensive portfolio of indoor and outdoor high-quality, energy-efficient products and systems as well technical expertise in all lighting applications from a single source.



A Customer-Focused, Service-Driven Collaborator

We develop for and together with you best fitting components and solutions – from standard to customized.



A Forward-Looking, Global Enterprise

We provide consulting, know-how, products, and services from a single source worldwide. Our customer proximity is our core – with on-site contacts and direct connections, you benefit from our global reach.

ALL FIELDS OF APPLICATION



Commercial




Retail, Hospitality and Residential



Architectural



Signage & Non-lighting



Sports



Horticulture



Street and Area



Industrial

**Inventronics
Lighting Systems**



An Innovative Technology Leader

Through continuous research and development, we improve and extend our range of highly reliable solutions with advanced technologies that ensure you are one step ahead.



A Trusted Partner for Lighting Companies and beyond

We don't compete with our customers; we work with you to create value and make you more successful.

At Inventronics, we are committed to delivering superior lighting solutions and building lasting partnerships for a brighter future.

Lighting System Solutions **Architectural**

— Light is design!





Experience the ultimate in world-class quality with our portfolio — enabling you to specify with unwavering confidence and peace of mind.

Expertise

Our lighting systems are designed to support unique and long-lasting lighting experiences



**Flexible
and changeable**



Dynamic regulation




**Durable
and long-lasting**

System Value

- Highest optical uniformity with outstanding stability over time of color coordinates & luminous flux levels
- Complete, tested, and guaranteed interoperable components to build any seamless curvilinear lighting systems.
- Extended installation possibilities, with the LED driver up to 50m away from the LED module ensuring full dimming functionality, with accurate dimming down to 0.1%.
- Our lighting systems can create the most precise smart light effects, thanks to a state-of-the-art set of controllable devices, including both wired and wireless controls and sensors.
- Our global technical service ensures the necessary on-site support for your lighting project, including component customization.

Sub-applications

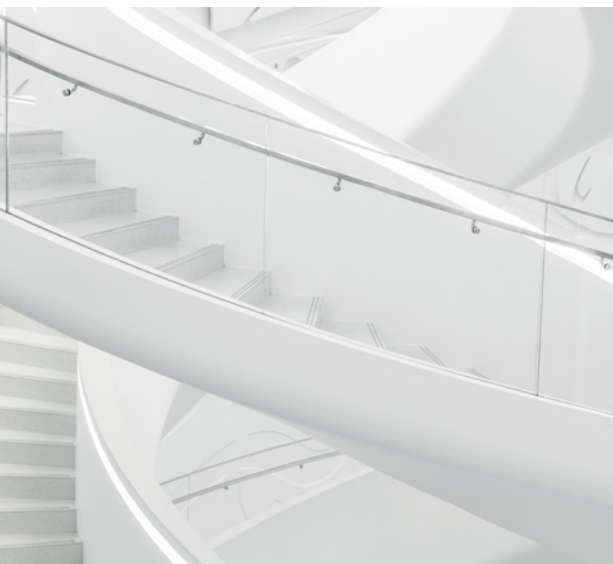

Indoor Beautification




Outdoor Beautification



Marine

Lighting System Solutions

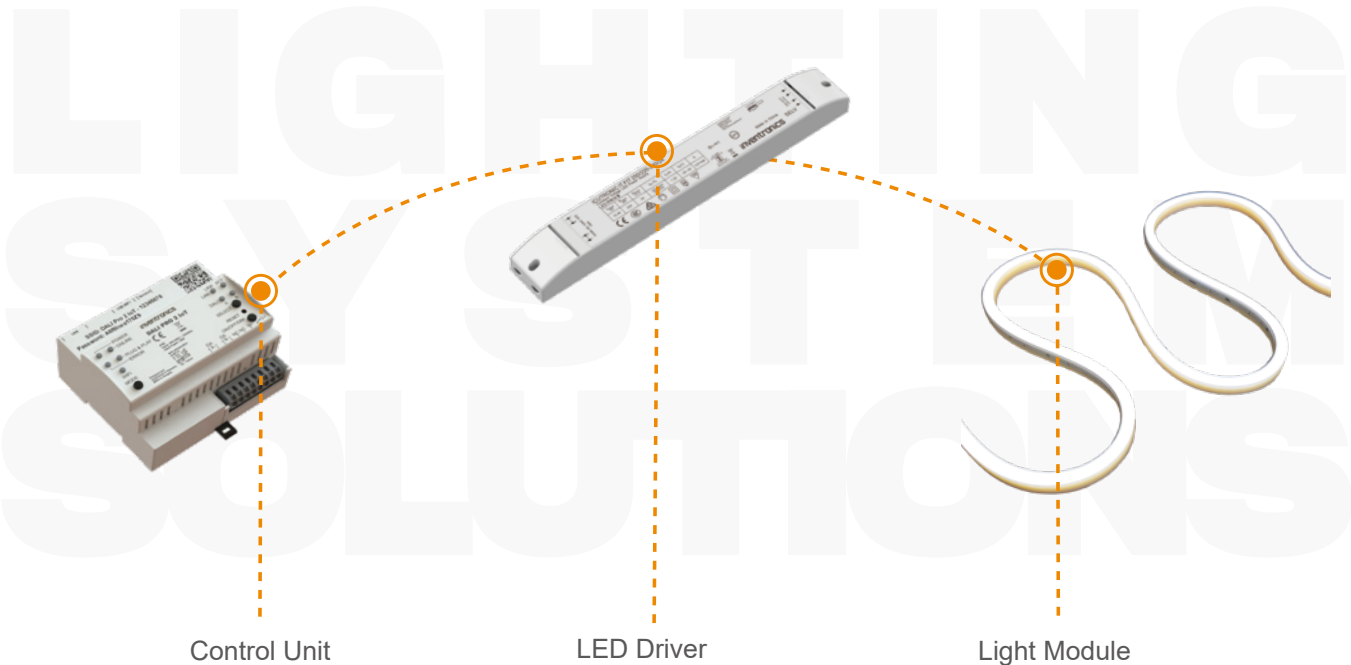

Entertainment

Art and Museum



▶ A masterful blend of Turkish cultural heritage and cutting-edge architectural artistry.

Camlica Grand Mosque,
Istanbul, Turkey

Inventronics Cases





This is the most breathtaking sacred spot in Zagreb.

St. Francis of Assisi Church, Zagreb, Croatia



Luxury and elegance redefined in the heart of London.

Raffles London at The OWO



Lighting System
Solutions
**Signage &
Non-lighting**

— Light is noticeable!



Choosing our signage lighting systems, allows your brand to stand out with exceptional visibility and reliability. Experience the highest homogeneity of illumination with our backlighting systems, designed to deliver the brightest, most efficient, and highest reliable illumination, in full light-control.

Expertise

Attractive advertising or impressive surface illumination, require backlighting systems and eye-catching channel letters in advertisements or homogeneous and color uniform backlit ceilings & walls for unique design interiors.



**Light uniformity
& efficiency**



**Complete component
system**



**Durability &
long-lasting reliability**

System Value

- Our LED modules are designed to deliver best-in-class homogeneous light for any backlit surface, shape and depth.
- Enhanced backlighting flexibility with modular systems available in a wide range of power and luminous flux options, in monochromatic white, tuneable white, and RGBW.
- Ease of installation, with complete set of application-specific accessories, making installation fast and intuitive.
- Our patented solutions, from lenses to smart drivers, ensure the highest system efficiency during operation, while providing full light control.
- Extended system warranty, built on fully tested, interoperable components, including LED modules, smart drivers, sensors, and controls.
- Our global technical service supports lighting projects with comprehensive assistance, including component customization.

Sub-applications




Back lit & Box lit



**Dynamic Façade
& Beautification**

Lighting System Solutions

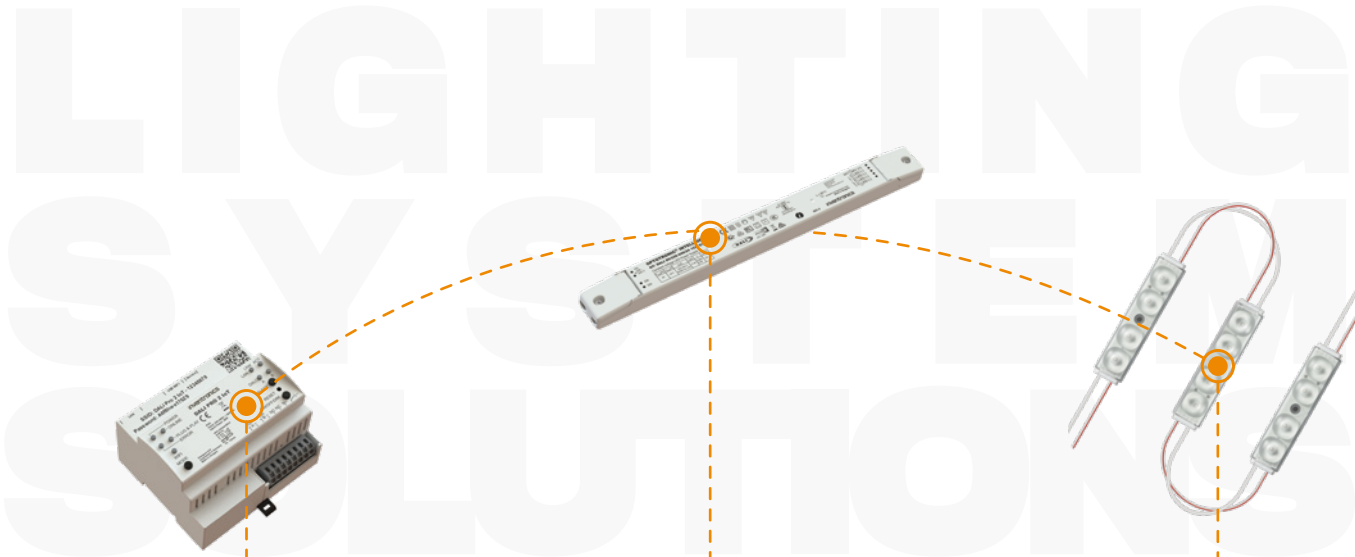

Control Unit

LED Driver

Light Module



Non-Lighting



Advantages

- Nominal voltage: 24 V | 48 V
- Nominal wattage per meter: 4.0 W ~ 25.8 W
- Type of protection: IP00
- Color rendering index Ra: 80 | 90
- Color temperature: 2400 K ~ 4000 K
- Luminous flux per meter: 325 lm ~ 4100 lm
- Length: 3000 mm ~ 18000 mm
- Length – smallest unit: 50 mm | 100 mm
- Beam angle: 120 °
- LEDs per meter: 80
- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Light stability over time typically 1 SDCM, tested acc. to IEC 62717 @ 6,000 h
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal Lab tests
- Reliable photometric parameters according to IES LM-79, EN13032-4 and CIE S 025
- Accurate description of the color rendition of the light source acc. to IES TM-30-15
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Vibration-resistant for stationary installations acc. to IEC60068-2-6 and IEC60068-2-64
- Flicker and stroboscopic effect-free acc. to IEC TR 61547-1 and IEC TR 63158
- Tested by accredited Product Qualification Lab. ISO9001, ISO 17025, ACCREDIA, VDE
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back

Safety Certifications



More Technical Data

24V Models:



48V Models:





Advantages

- Nominal voltage: 24 V | 48 V
- Nominal wattage per meter: 4.0 W ~ 26.4 W
- Type of protection: IP66/IP68
- Color rendering index Ra: 80 | 90
- Color temperature: 2400 K ~ 4000 K
- Luminous flux per meter: 430 lm ~ 4000 lm
- Length: 3000 mm ~ 18000 mm
- Length – smallest unit: 50 mm | 100 mm
- Beam angle: 120 °
- LEDs per meter: 80
- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Light stability over time typically 1 SDCM, tested acc. to IEC 62717 @ 6,000 h
- LED lifetime acc. to IES LM-80 and IES TM-21 standards
- Reliable photometric parameters according to IES LM-79, EN13032-4 and CIE S 025
- Accurate description of the color rendition of the light source acc. to IES TM-30-15
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Vibration-resistant for stationary installations acc. to IEC60068-2-6 and IEC60068-2-64
- Flicker and stroboscopic effect-free acc. to IEC TR 61547-1 and IEC TR 63158
- Tested by accredited Product Qualification Lab. ISO9001, ISO 17025, ACCREDIA, VDE
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- High-performance silicone for extremely long life

Safety Certifications



More Technical Data

24V Models:



48V Models:





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 6.1 W ~ 20 W
- Type of protection: IP00 | IP68
- Color rendering index Ra: 80 ~ 95
- Color temperature: 2500 K ~ 4000 K
- Luminous flux per meter: 800 lm ~ 2100 lm
- Length: 5000 mm | 10000 mm
- Length – smallest unit: 50 mm
- Beam angle: 120°
- LEDs per meter: 140
- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Light stability over time typically 1 SDCM, tested acc. to IEC 62717 @ 6,000 h
- LED lifetime acc. to IES LM-80 and IES TM-21 standards
Reliable photometric parameters according to IES LM-79,
- EN13032-4 and CIE S 025
- Accurate description of the color rendition of the light source acc. to IES TM-30-15
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Vibration-resistant for stationary installations acc. to IEC60068-2-6 and IEC60068-2-64
- Flicker and stroboscopic effect-free acc. to IEC TR 61547-1 and IEC TR 63158
- Tested by accredited Product Qualification Lab. ISO9001, ISO 17025, ACCREDIA, VDE
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- High-performance silicone for extremely long life

Safety Certifications



More Technical Data





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 4.5 W ~ 15.3 W
- Type of protection: IP00 | IP67
- Color rendering index Ra: 80 | 90
- Color temperature: 2700 K ~ 4000 K
- Luminous flux per meter: 490 lm ~ 2100 lm
- Length: 5000 mm
- Length – smallest unit: 100 mm
- Beam angle: 120°
- LEDs per meter: 70
- High homogeneity and uniform illumination due to 70 LEDs/m
- Constant flux over length and power supply variations thanks to active IC on each single unit
- Single color bin in 3 SDCM
- Dimmable via pulse width modulation (PWM), 1...100%
- Lifetime up to 50,000 h (L70B50 & L80B10, Tp rated)
- Fast and reliable protection against accidental reverse power supply up to 25 V
- Robust ESD protection for reliable system operation
- Improved self-adhesive backside for easy and reliable mounting on different surfaces
- Pre-soldered cable on one side for quick and safe installation
- System combination with INVENTRONICS 24 V constant voltage drivers, optional connectors and mounting accessories
- 100% Made in Italy with 5-year product warranty and 7-year system guarantee

Safety Certifications



More Technical Data

IP00:



IP67:





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 4.5 W ~ 15.4 W
- Type of protection: IP00 | IP67
- Color rendering index Ra: 80 | 90
- Color temperature: 2700 K ~ 4000 K
- Luminous flux per meter: 470 lm ~ 2170 lm
- Length: 5000 mm
- Length – smallest unit: 50 mm
- Beam angle: 120°
- LEDs per meter: 140
- High homogeneity and uniform illumination due to 140 LEDs/m
- Constant flux over length and power supply variations thanks to active IC on each single unit
- Single color bin in 3 SDCM
- Dimmable via pulse width modulation (PWM), 1...100%
- Lifetime up to 50,000 h (L70B50 & L80B10, Tp rated)
- Fast and reliable protection against accidental reverse power supply up to 25 V
- Robust ESD protection for reliable system operation
- Improved self-adhesive backside for easy and reliable mounting on different surfaces
- Pre-soldered cable on one side for quick and safe installation
- System combination with INVENTRONICS 24 V constant voltage drivers, optional connectors and mounting accessories
- 100% Made in Italy with 5-year product warranty and 7-year system guarantee

Safety Certifications



More Technical Data

IP00:



IP67:





Advantages

- Energy saving low-power flexible LED strip
- Easy installation with track system
- Multi-cutable LED strip with CONNECT system
- Available in warm white and neutral white
- 120° viewing angle per module
- Consistent white light: 3 SDCM
- Color rendering index 90+ (CRI) and R9 > 50
- Lifetime: up to 50,000 h L70B50
- Dimmable (with suitable DALI dimming methods)
- Available with protection class IP00 and IP66
- IP66 protection, IP54 when cut and reconnected

Safety Certifications

CE

More Technical Data





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 7.9 W ~ 19.6 W
- Type of protection: IP00 | IP68
- Color rendering index Ra (white): up to 90
- Color temperature (white): 2200 K ~ 6500 K
- Luminous flux per meter: up to 1275 lm
- Length: 5100 mm | 6000 mm
- Length – smallest unit: 100 mm | 150 mm
- Beam angle: 120°
- LEDs per meter: up to 120
- Uniform color changing
- Great design freedom thanks to flexibility and cuttability of module
- High-performance silicone for extremely long life and flexibility
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- Toolless connection with the optional CONNECTsystem

Safety Certifications



More Technical Data





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 9.8 W ~ 34.7 W
- Type of protection: IP00
- Color rendering index Ra: 90
- Color temperature: 2700 K ~ 4180 K
- Luminous flux per meter: 1111 lm ~ 3400 lm
- Length: 3000 mm | 9000 mm
- Length – smallest unit: 75 mm
- Beam angle: 120 °
- LEDs per meter: 187
- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- Pre-soldered wires

Safety Certifications



More Technical Data



LINEARlight FLEX Tunable White Protect



Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 9.9 W ~ 32 W
- Type of protection: IP67
- Color rendering index Ra: 80 | 90
- Color temperature: 3100 K | 3700 K
- Luminous flux per meter: 1134 lm ~ 3356 lm
- Length: 3000 mm | 9000 mm
- Length – smallest unit: 75 mm
- Beam angle: 120 °
- LEDs per meter: 187
- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal Lab tests
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- High-performance silicone for extremely long life

Safety Certifications



More Technical Data





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 7.3 W ~ 21 W
- Type of protection: IP66/IP68
- Color rendering index Ra: 80 | 90
- Color temperature: 2440 K ~ 7100 K
- Luminous flux per meter: 460 lm ~ 1550 lm
- Length: 4000 mm ~ 10000 mm
- Length – smallest unit: 50 mm
- Beam angle: 120 °
- LEDs per meter: 140
- IP66/IP68 protection with high performance silicone
- Reliable connection over long periods of time: IP66/67 connector with built-in protection against liquids penetrating through the wires into the LED strip
- Outdoor use possible: UV and salt mist resistant (UV acc. to ISO 4892-2 - Method A, salt mist acc. to IEC 60068-2-52 severity 1)

Safety Certifications



More Technical Data



LINEARlight FLEX Diffuse SIDE



Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 7 W ~ 21 W
- Type of protection IP66/IP67 | IP66/IP68 | IP67
- Color rendering index Ra: 80 | 90
- Color temperature: 2300 K ~ 6900 K
- Luminous flux per meter: 340 lm ~ 1050 lm
- Length: 4000 mm ~ 10000 mm
- Length – smallest unit: 50 mm
- Beam angle: 120 °
- LEDs per meter: 140
- IP68 protection with high performance silicone
- Reliable connection over long periods of time: IP67 connector with built-in protection against liquids penetrating through the wires into the LED strip
- Outdoor use possible: UV and salt mist resistant (UV acc. to ISO 4892-2 - Method A, salt mist acc. to IEC 60068-2-52 severity 1)

Safety Certifications



More Technical Data





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 18.0 W
- Type of protection: IP67
- Color rendering index Ra: RGB
- Color temperature: 4000 K
- Luminous flux per meter: 170 lm
- Length: 5000 mm
- Length – smallest unit: 100 mm
- Beam angle: 120 °
- LEDs per meter: 70
- Pastel colours thanks white LED with good color rendering (4000K)
- Long lifetime: 50.000 hours

Safety Certifications



More Technical Data





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter. 18.0 W
- Type of protection: IP67
- Color rendering index Ra: RGB
- Color temperature. 4000 K
- Luminous flux per meter: 170 lm
- Length: 5000 mm
- Length – smallest unit: 100 mm
- Beam angle: 120 °
- LEDs per meter: 70
- Pastel colours thanks white LED with good color rendering (4000K)
- Long lifetime: 50.000 hours

Safety Certifications



More Technical Data





BackLED CP 24V



Advantages

- Compatible with OPTOTRONIC constant voltage drivers / dimmers
- Color consistency in 3 SDCM
- Patented Square Lens technology
- Wide CCT and color options available
- IP66 rating
- Lifetime (L80/B10): 50,000 h (temperature at Tc = 70 °C)
- 5-year warranty @ Ta = 70 °C
- High module efficacy: up to 135 lm/W
- Uniform light pattern design for 60 ~ 200 mm lightbox depth
- Backside injection technology for high protection level
- Energy saving with high efficacy
- Flammability rating at V0

Safety Certifications



More Technical Data

**BackLED
M CP G5:**



**BackLED
L CP G5:**



**BackLED
XL CP G5:**



**BA-m-Ho
CP G5:**



**BA-S
CP G5:**





BackLED Tunable White CP G5

Advantages

- LED chain comprising 30 LED modules connected by flexible cables
- Each LED module contains 4 LEDs
- LED module pitch variable between 150 ~ 450 mm
- Compatible with INVENTRONICS OPTOTRONIC constant voltage drivers / dimmers
- Color consistency of 3 SDCM
- Patented Square Lens technology
- CCT range 2700 K ... 6500 K
- IP66 rating
- Lifetime L80B10 50,000 h @ Tc 75°C
- 5 years warranty

About BackLED Tunable White CP G5

BackLED TW CP G5 provides light boxes and high-ceiling sky lighting designs high level of illumination and adjustable color temperature via Tunable White (TW). It provides Uniform light pattern design for 150-450 mm light-box depth and can be used in various Lumious ceilings applications in Hospitality, restaurants, shops & high end residential etc.

Safety Certifications



More Technical Data





Advantages

- 24 V constant voltage LED modules
- Tunable white 2700K-6500K for dynamic white applications
- Color rendering index Ra: 90
- Constant LED pitch even at board interconnections
- Cuttable, single board for an exact fit in any installation
- Product only compatible with DALI DT8 drivers (TW) or BLE devices with TW lamp profiles
- Provides homogenous light suitable for application in area luminaires
- Quick and easy mounting thanks to plastic holder
- Easy wiring with push-in connectors
- Low energy consumption and less heat generation
- Optimal operation on OPTOTRONIC® 24VDC and 24VDC dimmable power supplies

Safety Certifications



More Technical Data





BackLED CB G2 24V

Advantages

- Long lifetime (L70/B50: 50,000 h at $T_c = 75^\circ\text{C}$) ensures reliability even under continuous operation
- Switching endurance up to 1,000,000 cycles, ideal for dynamic or frequently switched signage
- Wide beam angle delivers excellent uniformity, reducing shadowing and hotspots
- Color consistency within 3 SDCM for uniform appearance across all installations
- IP66 rating ensures strong protection against dust and water ingress
- 2 Version available - 100lm/W & 150 lm/W

About BackLED CB G2 24V

High-performance LED module family designed for signage boxes, sky ceilings, luminous ceilings that is reliable, and built for long-lasting visual consistency.

Safety Certifications



Product Name	Output Power per module (W)	Nominal wattage (W) /per EAN 10	SDCM	Lm/W	Mod /chain	Operating Voltage (DC)
BA-M-CB-XXX-24-G2-103	0.72W	14.4	< 3	100	40	24
BA-M-HO-CB-XXX-24-G2-103	0.9W	18	< 3	100	40	24
BA-L-CB-XXX-24-G2-103	1.2W	24	< 3	100	40	24
BA-L-HO-CB-XXX-24-G2-103	1.5W	30	< 3	100	40	24
BA-L-HO-SQ-CB-XXX-24-G2-103	2W	40	< 3	100	40	24
BA-M-CB-XXX-24-G2-153	0.72W	14.4	< 3	150	40	24
BA-M-HO-CB-XXX-24-G2-153	0.9W	18	< 3	150	20	24
BA-L-CB-XXX-24-G2-153	1.2W	24	< 3	150	20	24
BA-L-HO-CB-XXX-24-G2-153	1.5W	30	< 3	150	20	24
BA-L-HO-SQ-CB-XXX-24-G2-153	2W	40	< 3	150	20	24
BA-M-CB-XXX-24-G2-105	0.72W	14.4	< 3	100	20	24
BA-M-HO-CB-XXX-24-G2-105	0.9W	18	< 3	100	20	24
BA-L-CB-XXX-24-G2-105	1.2W	24	< 3	100	20	24
BA-L-HO-CB-XXX-24-G2-105	1.5W	30	< 3	100	20	24
BA-L-HO-SQ-CB-XXX-24-G2-105	2W	40	< 3	100	20	24
BA-M-CB-XXX-24-G2-155	0.72W	14.4	< 3	150	20	24
BA-M-HO-CB-XXX-24-G2-155	0.9W	18	< 3	150	20	24
BA-L-CB-XXX-24-G2-155	1.2W	24	< 3	150	20	24
BA-L-HO-CB-XXX-24-G2-155	1.5W	30	< 3	150	20	24
BA-L-HO-SQ-CB-XXX-24-G2-155	2W	40	< 3	150	20	24
BA-M-CB-RED-12-G2	0.72W	14.4	< 3	34	20	12
BA-M-CB-GRN-12-G2	0.72W	14.4	< 3	41	20	12
BA-M-CB-BLU-12-G2	0.72W	14.4	< 3	17	20	12
BA-M-CB-RED-24-G2	0.72W	14.4	< 3	34	20	24
BA-M-CB-GRN-24-G2	0.72W	14.4	< 3	41	20	24
BA-M-CB-BLU-24-G2	0.72W	14.4	< 3	17	20	24





BackLED RGBW G3/DMX

Advantages

- Upgraded flux output up to 258 lm per module
- Special batwing 160° lens technology
- IP68 rating
- Lifetime L70B50 50,000 h @ max Tc 75°C
- White color consistency of 3 SDCM, 6500K for brilliant pastel colours
- 4000K, 3000K, 2700K, Amber available on request
- 2 versions available:
 whole chain control with current regulator driven modules
 DMX512 single module addressability

About BackLED RGBW G3/DMX

BackLED RGBW CP G3 product family provides fancy dynamic coloured light for backlighting areas, ceilings, advertisement boxes & façade applications.

Dimming Functions

DALI-2 / DMX

Safety Certifications



EAN	Product Name	Output Power per module (W)	Nominal wattage (W) /per EAN 10	SDCM	Lm/W	Mod /chain	Operating Voltage (DC)
6977078997393	BA-RGBW-865-CP G3	2.9 (full RGBW) R - G - B - W	58 (full RGBW) R - G - B - W	< 3	87.6	20	24
6977078997645	BA-RGBW-865-CP G3 DMX	0.73 - 0.73 - 0.73 - 0.73	14,5 - 14,5 - 14,5 - 14,5		(W: 156)	20	24

More Technical Data





Advantages

- Long lifetime (L70/B50: 50,000 h at Tc = 75 °C) ensures reliability even under continuous operation
- Switching endurance up to 1,000,000 cycles, ideal for dynamic or frequently switched signage
- Wide beam angle delivers excellent uniformity, reducing shadowing and hotspots
- Color consistency within 3 SDCM for uniform appearance across all installations
- IP66 rating ensures strong protection against dust and water ingress
- Backside injection technology provides increased protection and ensures stable operation in outdoor environments

About BackLED CX G6

High-performance LED module family designed specifically meeting harsh conditions and strict safety requirements thanks to anti sulphur & IP 66. Optimized for applications such as channel letters, signage boxes, sky ceilings, luminous ceilings that is highly durable, reliable, and built for long-lasting visual consistency.

Safety Certifications



More Technical Data





Advantages

- LED driver whose output power can be shared arbitrarily among the 2 or 4 channels
- Dimming range: 0/0.1 ~ 100 %
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- High level surge protection: up to 6 kV (L-N), 8 kV (L/N-PE)
- Inrush current limiter circuit
- Long lasting and high reliability
- From 1 to 4 channels to arbitrarily distribute the power
- Suitable for installation under sunlight
- IP66/IP67 Salt mist resistant and DC functionality
- AstroDim functionality for automatic dimming and turn on/off

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115133	OTi DALI 210/220-240/244CHDT6/8 P	0 ~ 210	not relevant	24.7	93%	330 x 80 x 47
6937186115157	OTi DALI 100/220-240/244CHDT6/8 P	0 ~ 100	not relevant	24.7	93%	237 x 80 x 40

More Technical Data





Advantages

- Universal input 100...277 Vac
- 24,2 V output + 1,5 V adjustable
- 2 independent output channels in DALI-2, also with DT8 TW
- High modular PWM output frequency of 20...6 kHz
- Wide Ta up to -30...+60°C
- IP66 and IP67

Dimming Functions

Multi protocol dimming: DALI-2, 1-10V, 0-10V, PWM
Dimming range 1...100%

About IT D0P 24V 2CH P67

IT D0P 24V is a constant voltage LED driver family capable of dimming in multi protocol: DALI-2, 0-10V, 1-10V, PWM.

Its wide range input of 100...277 Vac and independent design suitable for CLASS I and II luminaire make the products particularly flexible in any installations and any geographical locations thanks to comprehensive approbation list.

Safety Certifications



EAN	Product Name	Output power (W)	Adjustable Current Range(mA)	Min Dimming Output Current(mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186176721	IT D0P 36/100-277/24/2C P67 G	36	N/A	N/A	24.2	86%	211 x 60 x 35
6937186176745	IT D0P 75/100-277/24/2C P67 G	75	N/A	N/A	24.2	90%	206 x 60 x 43
6937186176769	IT D0P 100/100-277/24/2C P67 G	96	N/A	N/A	24.2	90%	216 x 60 x 43
6937186176783	IT D0P 150/100-277/24/2C P67 G	150	N/A	N/A	24.2	92%	230 x 60 x 43
6937186176806	IT D0P 250/100-277/24/2C P67 G	250	N/A	N/A	24.2	92%	265 x 60 x 43
6937186176820	IT D0P 350/100-277/24/2C P67 G	350	N/A	N/A	24.2	92%	265 x 92 x 53



OT 24V P

Advantages

- DC mode functionality
- Type of protection: IP66 and IP67
- Surge protection: up to 4 kV (L-N) / 6 kV (L/N-PE)
- Wide operating temperature range: -30 ~ +55 °C
- Lifetime: up to 50,000 h (temperature at max. tc)
- Large range of products from 20 W to 250 W
- Installation in very cold and hot environments
- Very stable output power
- High electrical reversible short-circuit, overload, overtemperature protection

- Smart Power Supply: boosting power to turn on cold LEDs
- Independent installation possible

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186114914	OT 20/220-240/24 P	20	not relevant	24.2	83%	178 x 43 x 25
6937186114938	OT 40/220-240/24 P	40	not relevant	24.2	85%	208 x 43 x 26
6937186114952	OT 60/220-240/24 P	60	not relevant	24.2	87%	208 x 43 x 26
6937186114976	OT 100/220-240/24 P	100	not relevant	24.2	90%	240 x 50 x 34
6937186114990	OT 130/220-240/24 P	130	not relevant	24.2	90.5%	220 x 63 x 37
6937186115010	OT 250/220-240/24 P	250	not relevant	24.2	92%	265 x 68 x 40

More Technical Data





Advantages

- Small housing design for mounting in covers or linear luminaires
- Versatile scope of application thanks to an output power range of up to 300 W
- Robust and durable design for outdoor applications

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115034	OT FIT 80/220-240/24 P	40 ~ 80	not relevant	24.2	88.5%	170 x 53 x 31.5
6937186115058	OT FIT 150/220-240/24 P	75 ~ 150	not relevant	24.2	92%	240 x 53 x 31.5
6937186115072	OT FIT 200/220-240/24 P	100 ~ 200	not relevant	24.2	93%	215 x 53 x 31.5
6937186115096	OT FIT 300/220-240/24 P	150 ~ 300	not relevant	24.2	93%	260 x 68 x 39.6

More Technical Data





Advantages

- Versatile scope of application due to output power range of up to 300 W
- Very high efficiency
- IP rating: up to IP66/IP67
- High surge protection: up to 6 kV (L-N) / 6 kV (L/N-PE)

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438675	OT FIT 30/220-240/12 P	30	not relevant	12	82%	190 x 40 x 20.5
6977770438613	OT FIT 60/220-240/12 P	60	not relevant	12.5	87%	157 x 53 x 31.5
6977770438637	OT FIT 150/220-240/12 P	150	not relevant	12.5	91%	202 x 53 x 31.5
6977770438651	OT FIT 300/220-240/12 P	300	not relevant	12.5	91%	266 x 83 x 39.5

More Technical Data





Advantages

- DALI-2 certified
- 2 independent channels
- Lamp Failure detection
- CLASS II independent housing
- Smart Power Supply
- SELV, Vout: 24,2 V
- Ta range -20 ~ +50°C
- Very low min dimming level: 1%
- Mains voltage: 220 ~ 240 Vac
- 50'000 h lifetime at max tc
- 5 years guarantee
- IP20 independent housing
- Touch-DIM and corridor compatibility
- Overload/Over temperature and Short circuit protection
- Dimmable via DALI, 0-10V, Touch-Dim or corridor
- 24.2 V nominal output + 1.5 V adjustable
- CC mode for 18 ~ 24 V output option

About IT D0 24V 1CH - 2CH

Constant voltage indoor dimmable LED drivers, independent housing for installation freedom on any surfaces, Available in 1CH or 2CH allows to dim 24V constant voltage LED modules via DALI, 0-10V or Push button also in tunable white Nominal output voltage is 24,2 V with +1,5V adjustable via potentiometer CC mode available for output from 18 to 24 Vdc

Dimming Functions

DALI-2 / 0-10V / Touch Dim

Safety Certifications



More Technical Data





EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186142214	IT D0 36/220-240/24 C UNV1	36	not relevant	24.2	85	240 x 60 x 25
6937186142238	IT D0 75/220-240/24 C UNV1	75	not relevant	24.2	88	275 x 60 x 25
6937186142252	IT D0 150/220-240/24 C UNV1	150	not relevant	24.2	90	320 x 60 x 30
6937186142276	IT D0 200/220-240/24 C UNV1	200	not relevant	24.2	92	320 x 60 x 30
6937186142290	IT D0 36/220-240/24/2C C TW UNV1	36	not relevant	24.2	85	240 x 60 x 25
6937186142313	IT D0 75/220-240/24/2C C TW UNV1	75	not relevant	24.2	88	275 x 60 x 25
6937186142337	IT D0 150/220-240/24/2C C TW UNV1	150	not relevant	24.2	90	320 x 60 x 30
6937186142351	IT D0 200/220-240/24/2C C TW UNV1	200	not relevant	24.2	92	320 x 60 x 30



OTi DALI 48V 1CH

Advantages

- Dimmable via Touch DIM
- Dimming range: 0.1 ~ 100 %
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- IP rating: IP20
- Suitable for use in luminaires of protection class I and II
- Intelligent power matching thanks to Smart power supply
- 50 m load cable with EMI validated
- Form factor for mounting on the cove or in luminaires
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz)
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- DALI message detection "LED Module failure"
- DALI part 251-252-253

About OTi DALI 48V 1CH

Constant voltage indoor dimmable LED drivers, independent housing for installation freedom on any surfaces, Allows to dim 48V constant voltage LED modules via DALI.

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (LxWxH)(mm)
6977770432499	OTi DALI 160/220-240/48 1CH	0 ~ 160	not relevant	48.2	95%	300x50x35
6977770432451	OTi DALI 50/220-240/48 1CH	0 ~ 50	not relevant	48.2	92%	346x32x22
6977770432475	OTi DALI 80/220-240/48 1CH	0 ~ 80	not relevant	48.2	93%	346x32x22

More Technical Data





Advantages

- 50, 80, 160 W / 24 V LED drivers, multichannel output
- Lighting wireless Bluetooth Mesh network
- Different light profiles to customize the application
- Power supply and control of white, Tunable White, Tunable Warm White, Dim to Warm
- Power supply and control of RGB and RGBW LED modules (only 50 W and 80 W)
- Driver with integrated CASAMBI lighting control system
- Slim form factor for installation in light boxes
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz).

About OT Wi 24V CA

Optotronic Wireless Intelligent Constant Voltage drivers with CASAMBI control, up to 4 output channel for different LED module control (White, monochrome, TW, RGBW). Independent housing for installation freedom on any surfaces.

Dimming Functions

Bluetooth Casambi

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115195	OT WI 50/220-240/24 4CH CA	50	not relevant	24.2	92%	345 x 32 x 22
6937186115171	OT WI 80/220-240/24 4CH CA	80	not relevant	24.2	93%	345 x 32 x 22
6937186115218	OT WI 160/220-240/24 2CH CA	160	not relevant	24.2	93%	300 x 50 x 35

More Technical Data





Advantages

- Dimmable via Touch DIM
- Available as single-channel or multi-channel with DT6 and DT8 in one device
- Dimming range: 0.1 ~ 100 % (for 50-80-160W) or 1 ~ 100 % (for 30W)
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Intelligent power matching thanks to Smart power supply
- Form factor for mounting on the cove or in luminaires
- No stroboscopic effect thanks to patented high PWM frequency management (2 kHz)
- IP rating: IP20
- Suitable for installation in emergency lighting systems according to EN 60598-2-22

Dimming Functions

DALI-2

Safety Certifications



More Technical Data





EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115119	OTi DALI 30/220-240/24 1CH	30	not relevant	24.2	88%	103 x 67 x 29.5
6977770431881	OTi DALI 50/220-240/24 1CH G3	50	not relevant	24.2	92%	346 x 32 x 22
6977770431966	OTi DALI 50/220-240/24 4CH DT6/8 G3	50	not relevant	24.2	92%	346 x 32 x 22
6977770431867	OTi DALI 80/220-240/24 1CH G3	80	not relevant	24.2	93%	346 x 32 x 22
6977770431942	OTi DALI 80/220-240/24 4CH DT6/8 G3	80	not relevant	24.2	93%	346 x 32 x 22
6977770431904	OTi DALI 160/220-240/24 1CH G3	160	not relevant	24.2	93%	300 x 50 x 35
6977770431928	OTi DALI 160/220-240/ 24 2CH DT6/8 G3	160	not relevant	24.2	93%	300 x 50 x 35



Advantages

- Intelligent DMX dimmer, with output voltage of 12, 24 and 48 V
- Control of LED modules up to 12 A
- RDM functionality for total control in application
- Control of white, Tunable White, RGB, RGBW and RGBTW LED modules
- Independent housing for ceiling installation
- Minimal installation effort
- Selectable PWM frequency

Dimming Functions

DMX

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977078993838	OT DMX DIM 5CH	576	not relevant	12 ~ 48	>95%	172 x 42 x 20

More Technical Data





OT PC 24V

Advantages

- IP rating: IP20
- High efficiency
- Very stable output power
- High electrical reversible short-circuit, overload, overtemperature protection
- Independent installation possible
- Suitable for luminaires of protection classes I and II
- 24 V constant output voltage SELV
- Wide Ta range -20 ~ +50
- Lifetime: up to 50,000 h(temperature at max.tc)
- Dimming range: 3 ~ 100 % luminous flux
- Recommended to Use Trailing Edge dimmer

About OT PC 24V

Optotronic Constant Voltage drivers with phase-cut dimming control port. Independent housing for installation freedom on any surfaces.

Dimming Functions

Phase-Cut

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438460	OT FIT 36/220-240/24 PC	2.42 ~ 36	not relevant	24.2	85%	103 x 67 x 29.5
6977770438484	OT FIT 75/220-240/24 PC	24.2 ~ 75	not relevant	24.2	92%	110 x 75 x 30
6977770438569	OT FIT 150/220-240/24 PC	60.5 ~ 150	not relevant	24.2	92%	170 x 76 x 30

More Technical Data





IT D0P 12-48V

Advantages

- 12-48 V SELV output constant voltage range
- Output power up to 480 W
- 10A handling allowed on one channel
- Overload/Over temperature/Short circuit protection, automatic, reversible 50.000h at tc max
- 10% cumulated failure
- Screw terminals and integrated cable clamps
- Suitable for Class I & II luminaires
- Wide ta range -25 ~ +50°C
- NFC programmability
- Touch DIM compatibility
- 5 years guarantee
- High power handling on 4 channels
- Multi-dim protocols: DALI-2, 0/1-10V, Resistor, PWM
1 to 4 channel output with DALI-2 certification
- DALI-2 certified incl. Parts 251, 252, 253
- DT6 and DT8 operations
- TW in 0-10V compatible

About IT D0P 12-48V

- Multi-dimming DC-DC device, in system with inventronics constant voltage LED drivers with ON/OFF functions can deliver dimming operations up to 480 W from 4 output channels
- 21 different dimming options easily programmable with NFC
- Box programming available for fast batch programming
- Independent housing with endcaps allows maximum installation freedom
- Compatible with touch timing and double touch dimming in TW for dimmable solutions without DALI interfaces

Dimming Functions

DALI-2 / 0(1)-10V / PWM

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186134127	IT D0P 480/12-48V/4C NFC L C RGBW	480	not relevant	12 - 48	/	195 x 51 x 20

More Technical Data





IT FIT 24V

Advantages

- Wide Ta range -20 ~ +50°C
- 24 V constant output voltage
- Output power up to 250 W
- High efficiency up to 93% (depend on different wattage)
- PF 0.98
- Screw terminal
- Suitable for Class I/II luminaires
- Build-in and independent installation
- 5 years guarantee*
- Cable clamp integrated
- SELV
- Overload protection
- Overtemperature protection
- Mains voltage: 220 ~ 240 VAC
- Class II design for wide application
- Well design for Flex and Signage
- Excellent price/quality/watt ratio
- Lifetime: up to 50,000 h (temperature at max. tc)

Dimming Functions

N/A

Safety Certifications



More Technical Data



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186142672	IT FIT 30/220-240/24	30	not relevant	24	87%	170 x 40 x 30
6937186142696	IT FIT 60/220-240/24	60	not relevant	24	89%	224 x 40 x 30
6937186142610	IT FIT 120/220-240/24	120	not relevant	24	90%	284 x 40 x 30
6937186142634	IT FIT 180/220-240/24	180	not relevant	24	92%	324 x 40 x 30
6937186142658	IT FIT 250/220-240/24	250	not relevant	24	93%	375 x 50 x 35





Advantages

- Constant Voltage drivers suitable for 24V LED
- Type of protection: IP20
- Wide operating temperature range: -20 ~ +50 °C
- Lifetime: up to 50,000 h (temperature at max. tc)
- Installation in cold and hot environments
- Very stable output power
- High electrical reversible short-circuit, overload, overtemperature protection
- Independent installation possible

About OT SLIM 24V

Constant Voltage drivers suitable for 24V LED modules with very low housing profile suitable for independent installations

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (LxWxH)(mm)
6977770438699	OT SLIM 30/220-240/24	30	not relevant	24.2	86%	270 x 30 x 17.5
6977770438712	OT SLIM 60/220-240/24	60	not relevant	24.2	90%	338 x 30 x 17.5
6977770438736	OT SLIM 100/220-240/24	100	not relevant	24.2	91%	374 x 30 x 18.5
6977770438750	OT SLIM 160/220-240/24	160	not relevant	24.2	92%	404 x 30 x 21.5
6977770438774	OT SLIM 250/220-240/24	250	not relevant	24.2	91%	353 x 60 x 31

More Technical Data





DALI PRO 2 IoT

Advantages

- DALI-2 certified
- IoT ready with built-in gateway for remote data access
- Easy browser-based commissioning UI and Professional Software available
- Small form factor: only 6 TE (DIN rail)
- Commissioning via Ethernet/WLAN
- DALI-2 certified for improved multi-vendor interoperability
- Template based onsite commissioning via Smart device
- Building Management System integration via API or optional KNX interface
- Remote access for changes in the configuration from every location
- LAN Interconnect to connect up-to 8 Controllers into one network
- API for connection of a 3rd party SW or Cloud with the DALI Pro 2 IoT Controller
- Automated testing and reporting of emergency lighting installations
- Daylight Simulation via scene recall and/or light sensor regulation
- Supports HCL, RGBW+TW applications

Safety Certifications



EAN	Product Name
6977078993692	DALI PRO 2 IOT

More Technical Data






DALI MCU TW G2

Advantages

- Up to 4 DALI PCU TW G2 can be connected in parallel to set up multiple control points
- Automatic synchronization between the control points
- Cover and rotary switch in neutral white
- Length of the DALI control cable: up to 300 m
- Intuitive manual dimming, switching and changing of colour temperature
- Individual setting of minimal brightness level
- Individual setting of colour temperature range

Safety Certifications



EAN	Product Name
6977078993777	DALI MCU TW G2

More Technical Data





Advantages

- Expansion of DALI systems by 64 DALI control gears each time
- Extends the DALI line by 300 m
- Maximum power consumption in stand-by mode: 1 W
- Four versatile operating modes: Basic, Group, Extend, Touch DIM
- Basic mode: DALI-2 certified DALI converter for grouping up to 64 standard DALI drivers.
- Group mode: Groups up to 64 DALI drivers and up to 5 Inventronics DALI-2 sensors.
- Group mode: Supports standard DALI drivers and DALI-DT8 drivers (TW / RGB (W)).
- Touch DIM mode: Simple switching and dimming of up to 64 drivers.
- Powerful power supply: 130 mA DALI bus power supply
- Can be addressed via DALI

Safety Certifications



EAN	Product Name
6937186116437	DALI-2 REP LI

More Technical Data



SOFTWARE

Software

Overview

Inventronics offers a comprehensive range of professional software solutions to support and configure its components.



T4T



Apps



Tuner4TRONIC

A software suite for OEMs that enables the configuration of all programmable OPTOTRONIC, ICUTRONIC, QUICKTRONIC, and POWERTRONIC LED drivers during the luminaire manufacturing process.



DALI PRO PC TOOL

Software for configuring DALI installations in combination with the DALI PROFESSIONAL control unit DALI PRO C-4 RTC or DALI PRO 2 IoT. DALI PRO 2 IoT is an innovative lighting management control technology for the IoT era.



DALI PRO CONTROL

Easily manage complex lighting scenarios at a touch: switch or dim lights, change light colors or adjust the color temperature.



DALI Wizard

A GUI tool for setting up, analyzing, and diagnosing DALI ECG installations, used in combination with the DALI Wizard control device.



BT Config

An app that offers standalone component detection and automatic light calibration, eliminating the need for manual commissioning and adjustments of daylight-dependent controls.



BT Control

Allows the control of DALI-enabled luminaires via a smartphone, including light level and color temperature adjustments, as well as the storage of individual lighting scenes.



PROGRAMMING TOOLS

Programming Tools

DALI magic



Features

- USB DALI converter for Tuner4TRONIC and DALI wizard software for Windows PC
- Pushbutton to test DALI dimming without need of connection to computer
- Powered by USB or by included universal power supply
- Integrated automatic DALI supply of up to 64 devices (up to 4 if powered by USB)

▶ APAC Region

Inventronics Hangzhou - Headquarters

Inventronics Science and Technology Park, #459 Jianghong Road, Binjiang District, Hangzhou, Zhejiang, China, 310052
Tel: +86-571-56565800
E-mail: sales@inventronicsglobal.com

Inventronics Shenzhen

2F,Block B,Jianxing Technology Building,No.3151 Shahe West Road,Nanshan District, Shenzhen
Tel: +86-571-56565800
E-mail: sales@inventronicsglobal.com

Inventronics Indonesia

JB Tower 10th floor
Jl. Kebon Sirih no. 48-50 Gambir,Jakarta, 10110, Indonesia
Tel: +62 21 5095 8096
Email: id-sales@inventronicsglobal.com

Inventronics Singapore

7 Holland Village Way,
Lobby B, #05-03 / 04 / 05,
Singapore 275748
Tel: +65 9337 5247
E-mail: sg-sales@inventronicsglobal.com

Inventronics Guangzhou

Room 1105-1107, Clifford Corporate Center Building
No. 15, Fuhua Road, Clifford Estate 511496 Panyu,Guangzhou
City, Guangdong Province, PRC
E-mail: ds_mktg@inventronicsglobal.com

Inventronics Japan

Regus Business Center, Shin Kokusai Building 8F, 3-4-1
Marunouchi, Chiyoda-Ku, Japan 100-0005
Tel: +81-9055297496
Email: jp-sales@inventronicsglobal.com

Inventronics Korea

Suite-615, 501, Teheran-ro, Gangnam-gu, Seoul, Republic of
Korea (06168)(V-flex)
E-mail: kr-sales@inventronicsglobal.com

Inventronics Malaysia

Level 4, Uptown 7, Jalan SS21/39, Damansara Utama,
47400 Petaling Jaya, Selangor, Malaysia
Tel: +6012 398 1085
E-mail: my-sales@inventronicsglobal.com

▶ Europe Region

Inventronics Netherlands

Polluxstraat 21, 5047 RA Tilburg, The Netherlands
Tel: +31-857-470-061
Email: eu-sales@inventronicsglobal.com

Inventronics Italy

Via Castagnole 65/A, 31100 Treviso, Italy
Email: support@inventronicsglobal.com

Inventronics Germany

Parking 31-33, 85748 Garching, Germany
Email: support@inventronicsglobal.com

Inventronics France

18 Rue Gaston Romazzotti, 67120 Molsheim, France
Tel: +33 3 68 41 88 99
Email: support@inventronicsglobal.com

▶ Americas Region

Inventronics USA

2825 S Tulsa Ave. Oklahoma City, OK 73108 USA
Tel: +1-405-600-7480
E-mail: usa-sales@inventronicsglobal.com

Inventronics Brazil

Barueri/SP, Brazil
Tel: +55(11)2680-8310
E-mail: brazilsales@inventronicsglobal.com

Inventronics Mexico

Carretera San Martín de las Flores #520
Building 8A Parque Industrial Prologis El Salto
San Pedro Tlaquepaque, Jalisco, Mexico
Tel: +521 3338634039
E-mail: usa-sales@inventronicsglobal.com

▶ MEA Region

Inventronics UAE

#405 E wing HQ Building, DSO, Dubai, UAE
E-mail: support@inventronicsglobal.com

▶ India Region

Inventronics India

Head Office: 4th & 5th Floor, B-Wing, Skyheights, Valipeer Road, Kalyan (west), Pin Code-421301
Factory: Survey No.15, All India Logistics Park, Janval Village, Lonad Village Road, Taluka- Bhiwandi -421 302-Thane
Tel: +91-9845054416
E-mail: in-sales@inventronicsglobal.com



Scan this QR code for more regional sales contacts.



inventronicsglobal.com