Light is OSRAM

OSRAM

OT SLIM 60/220-240/24

Constant Voltage LED driver

Benefits

Long lasting and high reliability. Super slim cross section for installation flexibility. Independent housing design to fit any applications. Through loop input connection

Applications

Cove lighting, handrail, light boxes Compact luminaires, tracks. Suitable for indoor CLASS II protection

Approvals



Housing material: plastic, white * image for information purpose only

L	338 mm	Total length
L1	290 mm	Holes interaxis
В	30 mm	Width
Н	17,5 mm	Height

Valid only if printed on product. When not printed on product label, they are under evaluation.

Product Features

- Independent (Class II protection)
- SELV, V_{out}: 24,2 V
- t_a range -25...+45°C
- Overload/Over temperature/Short circuit protection, automatic, reversible
- $T_c max = 70^{\circ}C$

- Low THD < 5%
- Low ripple < 5%
- Input voltage: 220–240 V_{AC} / 220–240 V_{DC}
- 50'000 h lifetime at T_c max **
- 5 years guarantee*

^{*10%} cumulated failure, ** 24 h = 14 h ON 10 h Standby


Electrical specification

	Item	Value	Unit	Remarks
	Nominal line voltage	220 - 240 220 - 240	V_{ac} V_{DC}	EMI filter to be applied by installer if V_{DC} is used, to keep CE approval. (1)
	Mains line frequency	0 / 50 / 60	Hz	
	AC voltage range	195.5 – 276	V	Permitted voltage range
	DC voltage range	176 – 250	V	Permitted voltage range
	Nominal current	0.300	Α	Full load, 230 V _{ac} , 50 Hz
•	Total Harmonic Distortion (THD)	< 5	%	Full load, 230 V _{ac} , 50 Hz, see graphs
•	Power factor λ	> 0.95		Full load, 230 V _{ac} , 50 Hz, see graphs
•	Efficiency in full load	90	%	Typical, Full load, 230 V _{ac} , 50 Hz, see graphs
	Device power loss	8.2	W	Full load, 230 Vac, 50 Hz, Typical
5	Intended for no-load application	No		Secondary switching not allowed
INPUT	Protection class	П		,
	Suitable for fixtures with prot. Class	&		
	•		۸	Full Load, 240 V _{ac} , Cold Start
	Inrush current	40	А	Duration = 300 μs, 50% / 50% Ι _{pk}
	Max. units per circuit breaker:			
	Max. ECG no. on circuit breaker 16 A (B)	10		
	Max. ECG no. on circuit breaker 25 A (B)	16		
	Max. ECG no. on circuit breaker 10 A (C)	11		
ŀ	Max. ECG no. on circuit breaker 16 A (C)	17		
•	Max. ECG no. on circuit breaker 25 A (C)	27		
	Max. ECG no. on circuit breaker 32 A (C)	35		
	Nominal voltage	24.2	V	
	Voltage accuracy	± 5	%	@ 220 - 240 V _{ac}
	Open circuit voltage Max.	25	V	
_	Voltage range	23.3 - 25	V	
OUTPUT	Voltage ripple	± 5	%	Ripple / average @ 100 Hz; Full load
Į.	Nominal output power	60	W	
	Maximum output power	60	W	
	Power range	0 - 60	W	PF (λ), THD and EMI verified between 24-60 W
	Leakage current	< 0.7	mA	240 V _{ac}
	Galvanic isolation	SELV		
	Ambient temperature range	-25+45	°C	
	Max. temperature at T _c test point	+70	°C	Measured on T _c point, T _a not exceeded
•	Storage temperature range	-40+85	°C	
	Permitted rel. humidity during operation	5 – 85	%	Not condensing
•	Surge capability (L vs N)	1	kV	acc to. EN 61547
	Environmental rating	Indoor		
	IP protection class	IP 20		
Ι¥Ι	Mains switching cycles	> 50000	cycles	@ T _a = 25°C
ENVIRONMENTAL	Expected ECG lifetime	50000	h	@ $T_a = 45$ °C, $T_c = 70$ °C and 10% failure rate,
SONI	Overheating protection	Yes		14 h ON and 10 h stand-by per day Auto reversible
Ν	Overload protection	Yes		Auto reversible
EN	Intended for no-load operation	No		
	Short-circuit protection	Yes		Auto reversible
	•	Cables		Auto reversible
	Type of connection		mm	LVWVH
	Dimensions Hologiptorovia	338 x 30 x 17.5	mm	LxWxH
	Holes interaxis	290	mm	
	Weight	170	g	Militar DALOGAG
	Casing material filter to be installed only on DC operation to	Plastic	L FNEO	White RAL9010

^{(1):} EMI filter to be installed only on DC operation to keep CE approbation. ENEC is not valid in DC operation (2): Stand-by and secondary switching is not allowed

Protection

Over temperature, Overload, Short-circuit. Auto reversible.



INPUT	Terminal	Screw terminal		Through loop 2L / 2N
	Wire peeling length	5	mm	
	Cable cross section	0.75 - 1.5	mm²	H03VV-F 2x0.75 mm ² H05VV-H2/F 2X0.75 mm ² H03VV-H2/F 2x0.75 mm ² H05VV-F 2x1.5 mm ²
-	Tanadani		AWG	41ED: /41ED
	Terminal	Screw terminal		1 LED+ / 1 LED-
OUTPUT	Wire peeling length	5	mm	
	Cable cross section	0.75 - 1.5	mm²	H03VV-F 2x0.75 mm ² H05VV-H2/F 2X0.75 mm ² H03VV-H2/F 2x0.75 mm ² H05VV-F 2x1.5 mm ²
		20	AWG	


Led wire length

EMI pass verified with wire length of 2 m, from the ECG to the LED module at full load.

Wiring longer than 2 m from ECG to LED module is possible, but site installation conditions may interfere with EMI with these longer cables. EMI is therefore not verified in this condition.


For longer lengths than 2 m, appropriate cable cross section must be carefully selected to reduce voltage drop.


Product drawing

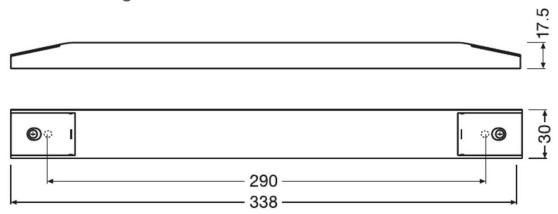



Installation requirements

It is suggested to keep the side and top of the driver at sufficient distance from other surfaces or other devices to avoid overheating.

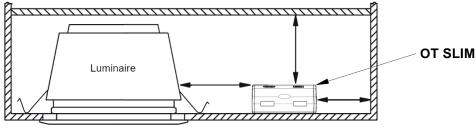









OT SLIM 60/220-240/24





Remarks

- Output short circuit protection: auto reversible when fault removed
- Output overload protection: auto reversible when fault removed
- Over temperature protection: the unit is protected against temporary overheating by shutting the unit down, auto reversible when temperature decreases
- Dimming compatibility: the OT SLIM driver is able work with OSRAM dimmer as dimmable solution.
 For example: OTi DALI DIM, OT DIM, OT RGBW DIM, OT BLE DIM. It is recommended to check the performance of total system in design-in stage.
- Application: the driver is intended for supply power to 24 V LED light sources like but not limited to –
 OSRAM LINEARlight FLEX® and Tec Flex LED flexible strips, OSRAM BackLED® and BoxLED® 24 V
 modules, OSRAM LINEARlight® Rigid FINESSE systems.
- Use of product under V_{DC}: EMI filter to be applied by installer if V_{DC} is used, to keep CE approval.
 ENEC approbation is not valid in DC operation
- No-load conditions: hot plug-in or secondary switching of LEDs is not permitted. Please take care to switch the driver off via L.
- Intended for use with LED modules.
- The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.
- Ecodesign regulation information:

Intended for use with LED modules. The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Standards

Ordering information

EN 61347-1

EN 61347-2-13

EN 55015

EN 61547

EN 61000-3-2

EN 61000-3-3

EN 60598-1

EN 62384

Product name	EAN 10	EAN 40	Pieces / Shipping carton
OT SLIM 60/220-240/24	4062172135856	4062172135863	30

OSRAM GmbH

Head Office: Marcel-Breuer-Strasse 6 80807 Munich, Germany Phone +49 89 6213-0 www.osram.com



Edition: 20 Oct 2023 Ver: 1.3 Status: Final Page 6/6 Misprints and technical changes excepted