

OTi DALI 210/220-240/24 1-4 CH (PHASE OUT)

- 1 to 4 DALI addressable channels
- LED driver whose output power can be shared arbitrarily among the 2 or 4 channels
- AstroDim functionality
- Dimming range: 0/0, 1...100 %
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- High level surge protection: up to 6 kV (L-N), 8 kV (L/N-PE)
- Inrush current limiter circuit

- Long lasting and high reliability
- From 1 to 4 channels to arbitrarily distribute the power
- Suitable for installation under sunlight
- IP66/IP67 Salt mist resistant and DC functionality
- AstroDim functionality for automatic dimming and turn on/off

Areas of application

- Public squares and architecture lighting
- Suitable for indoor and outdoor SELV installations
- Suitable for use in luminaires of protection class I

Technical data

Electrical data

Nominal input voltage	230...240 V
Mains frequency	50/60 Hz
Input voltage AC	198...264 V
Input voltage DC	176...276 V ¹⁾
Total harmonic distortion	< 5 %
Power factor λ	> 0.95
Efficiency in full-load	> 91 % ²⁾
Device power loss	18.4 W
Inrush current	3.7 A
Max. ECG no. on circuit breaker 10 A (B)	7
Max. ECG no. on circuit breaker 16 A (B)	11
Surge capability (L/N-Ground)	8 kV
Surge capability (L-N)	6 kV
Nominal output voltage	24.7 V ³⁾
U-OUT (working voltage)	24.7 V
Output PSTLM	<1
Output SVM	<0.4
Nominal output power	210 W ⁴⁾
Maximum output power	210 W ⁵⁾
Galvanic isolation	SELV

1) with external fuse


2) at 230 V, 50 Hz

3) DC voltage

4) Lamp failure detection: minimum load per channel that doesn't trigger open circuit detection is 30 W

5) at steady state

Dimensions & weight

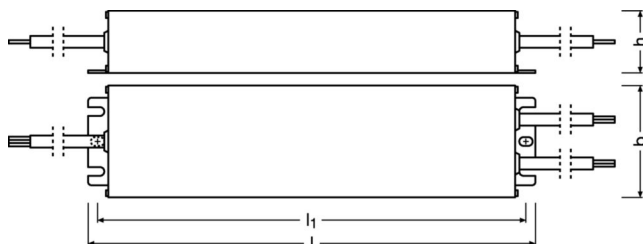

Length	330.0 mm
Width	69.0 mm
Height	37.0 mm
Mounting hole spacing, length	326.0 mm
Mounting hole spacing, width	320.0 mm
Cable cross-section, input side	1.0 mm ²
Cable cross-section, output side	1.5 mm ²
Wire preparation length, input side	90 mm
Wire preparation length, output side	90 mm
Product weight	1415.00 g

Colors & materials

Casing material	Aluminium
-----------------	-----------

Temperatures & operating conditions

Ambient temperature range	-20...+60 °C
Maximum temperature at tc test point	85 °C
Max.housing temperature in case of fault	110 °C
Temperature range at storage	-40...+85 °C
Permitted rel. humidity during operation	5...85 % ¹⁾

1) Maximum 56 days/year at 85 %

Lifespan

ECG lifetime	50000 h
--------------	---------

Capabilities

Dimmable	Yes
Dimming interface	DALI-2
Dimming range	0.1...100 %
Dimming method	Pulse Width Modulation
Suitable for fixtures with prot. class	I
Suitable for emergency lighting	Yes
Type of connection, input side	Wires
Type of connection, output side	Wires
Number of channels	4
Overheating protection	Automatic reversible
Overload protection	Automatic reversible
Short-circuit protection	Automatic reversible
Intended for no-load operation	No
No-load proof	Yes

Certificates & standards

Approval marks – approval	BIS / CCC / CE / EAC / ENEC 10 / RCM / VDE
Standards	EN 61347-2-13 / EN 61547 / EN 55015 / EN 61000-3-2 / EN 61000-3-3 / EN 61347-1 / EN 62493
Type of protection	IP66/IP67

Logistical data

Commodity code	85044083900
----------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	27-08-2025
Primary Article Identifier	4062172032087
Declaration No. in SCIP database	In work
SCIP_STATUS	In work
SCIP_ID	

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Download Data

File		
Product Datasheet	PDF	▶ OTi DALI 210 1-4CH Technical Datasheet (EN)
Certificates	PDF	▶ CB TEST CERTIFICATE DE1-62077
Certificates	PDF	▶ OT VDE ENEC 40050684 290125
Certificates	PDF	▶ OTi DALI 210 CB DE1 63487 280420
Certificates	PDF	▶ OTi DALI 210 1 4 CH IEC DE1 63487 A1 220920
Certificates	PDF	▶ VDE ENEC Certificate 40043863
Certificates	PDF	▶ OT EMC 40038482 290922
CAD data 3-dim	Compressed	▶ 3D STEP file
CAD data 3-dim	Compressed	▶ OTi DALI 210 220-240 24 1-4 CH - 3D stp file
Mandatory Publications	PDF	▶ OTi DALI 100 210 24 CE 3772470 04 280125
User instruction	PDF	▶ OPTOTRONIC LED Power Supply

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172032087 OSRAM	OTi DALI 210/220-240/24 1-4 CH	Shipping carton box 6 Pieces	380 x 262 x 201 mm	20.01 dm ³	1532.50 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.