

OTi DALI 30/220-240/24 1CH (NEW)

CV Power supplies with DALI



Product family features

- Dimmable via Touch DIM
- Available as single-channel or multi-channel with DT6 and DT8 in one device
- Dimming range: 0.1...100 % (for 50-80-160W) or 1...100 % (for 30W)
- Line frequency: 0 Hz | 50 Hz | 60 Hz

Product family benefits

- Intelligent power matching thanks to Smart power supply
- Form factor for mounting on the cove or in luminaires
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz)
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- DALI message detection "LED Module failure"
- IP rating: IP20

Areas of application

- Cove lighting, wall washer, corridor, handrail, luminous ceilings
- Suitable for use in luminaires of protection class I and II

Technical data

Electrical data


| | |
|--|----------------------|
| Nominal input voltage | 220...240 V |
| Mains frequency | 50/60 Hz |
| Input voltage AC | 198...264 V |
| Input voltage DC | 176...276 V |
| Total harmonic distortion | < 10 % |
| Power factor λ | 0.32...0.95 |
| Efficiency in full-load | > 88 % ¹⁾ |
| Device power loss | 4.5 W |
| Inrush current | 40 A |
| Max. ECG no. on circuit breaker 10 A (B) | 20 |
| Max. ECG no. on circuit breaker 16 A (B) | 31 |
| Surge capability (L/N-Ground) | 2 kV |
| Surge capability (L-N) | 1 kV |
| Nominal output voltage | 24.2 V ²⁾ |
| U-OUT (working voltage) | 24.2 V |
| Output PSTLM | ≤1 |
| Nominal output power | 30 W |
| Maximum output power | 30 W ³⁾ |
| Galvanic isolation | SELV |

1) at 230 V, 50 Hz

2) DC voltage

3) at steady state

Dimensions & weight

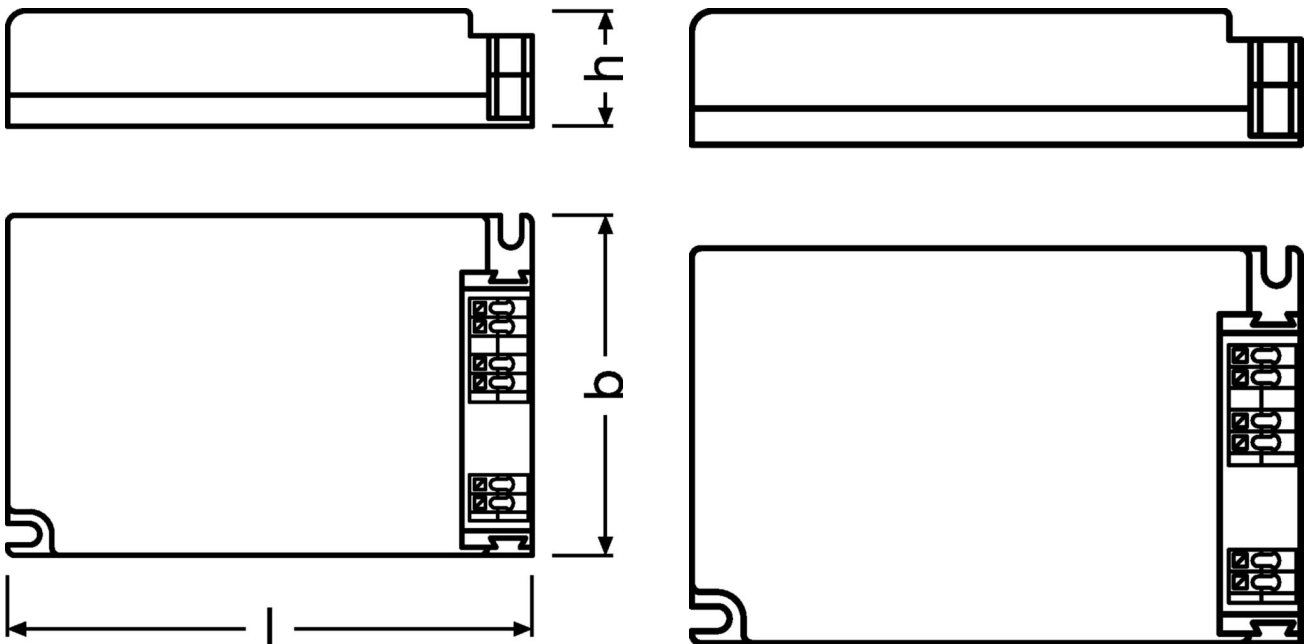

| | |
|--------------------------------------|---------------------------|
| Length | 103.0 mm |
| Height | 29.5 mm |
| Mounting hole spacing, length | 94.0 mm |
| Mounting hole spacing, width | 58.0 mm |
| Cable cross-section, input side | 0.5...1.5 mm ² |
| Cable cross-section, output side | 0.5...1.5 mm ² |
| Wire preparation length, input side | 7.0 mm |
| Wire preparation length, output side | 7.0 mm |
| Product weight | 155.00 g |

Colors & materials

| | |
|-----------------|---------|
| Casing material | Plastic |
|-----------------|---------|

Temperatures & operating conditions

| | |
|--|------------------------|
| Ambient temperature range | -20...+45 °C |
| Maximum temperature at tc test point | 80 °C |
| Max.housing temperature in case of fault | 110 °C |
| Temperature range at storage | -40...+85 °C |
| Permitted rel. humidity during operation | 5...85 % ¹⁾ |

1) Maximum 56 days/year at 85 %

Lifespan

| | |
|---------------------|---------|
| ECG lifetime | 50000 h |
|---------------------|---------|

Capabilities

| | |
|---|------------------------|
| Dimmable | Yes |
| Dimming interface | DALI |
| Dimming range | 1...100 % |
| Dimming method | Pulse Width Modulation |
| Suitable for fixtures with prot. class | I / II |
| Type of connection, input side | Plug-in connection |
| Type of connection, output side | Plug-in connection |
| Number of channels | 1 |
| Overheating protection | Automatic reversible |
| Overload protection | Automatic reversible |
| Short-circuit protection | Automatic reversible |
| Intended for no-load operation | No |
| No-load proof | Yes |

Programming

| | |
|--------------|-----|
| Tuner4TRONIC | Yes |
|--------------|-----|

Certificates & standards

| | |
|---------------------------|---|
| Approval marks – approval | CE / CCC / BIS / ENEC / EL / ENEC 25 / RCM / UKCA |
| Standards | Acc. to EN 61347-1 / Acc. to EN 61347-2-13 / Acc. to EN 61547 / Acc. to EN 61000-3-2 / Acc. to EN 62384 / Acc. to EN 60598-2-22 / Acc. to EN 62386 / Acc. to EN 55015 |
| Type of protection | IP20 |

Logistical data

| | |
|----------------|-------------|
| Commodity code | 85044083900 |
|----------------|-------------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
|---|---------------|
| Date of Declaration | 04-06-2024 |
| Primary Article Identifier | 4062172329767 |
| Declaration No. in SCIP database | In work |
| SCIP_STATUS | In work |
| SCIP_ID | |

Equipment / Accessories

- Suitable for 24 V LED modules

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Download Data

| File | | |
|------------------------|-----|---|
| Product Datasheet | PDF | ▶ OTi DALI 30 220 240 24 1CH TDS 20230110 |
| Mandatory Publications | PDF | ▶ OTi DALI 30 1CH CE 4459817 01 300523 |
| Mandatory Publications | PDF | ▶ OTi DALI 30 1CH UKDoC 4459818 260123 |
| User instruction | PDF | ▶ OPTOTRONIC LED Power Supply |

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|----------------------------|----------------------------------|--------------------------------------|-----------------------|--------------|
| 4062172329767 | OTi DALI 30/220-240/24 1CH | Shipping carton box 30 Pieces | 355 x 225 x 130 mm | 10.38 dm ³ | 169.73 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

Accessories Optional

| Product description | Accessory name | Accessory code |
|----------------------------|------------------------|-----------------|
| OTi DALI 30/220-240/24 1CH | OT CABLE CLAMP B-STYLE | ▶ 4052899077881 |

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.