

## OTi DALI 80/220-240/48 1CH (NEW)

CV Power supplies 48 V with DALI



### Product family features

- Dimmable via Touch DIM
- 50 m load cable with EMI validated
- Dimming range: 0.1...100 %
- Line frequency: 0 Hz | 50 Hz | 60 Hz

### Product family benefits

- Intelligent power matching thanks to Smart power supply
- Form factor for mounting on the cove or in luminaires
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz)
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- DALI message detection "LED Module failure"
- DALI part 251-252-253
- IP rating: IP20

## Areas of application


- Cove lighting, wall washer, corridor, handrail, luminous ceilings
- Suitable for use in luminaires of protection class I and II

## Technical data

### Electrical data

Nominal input voltage	220...240 V
Mains frequency	50/60 Hz
Input voltage AC	195...264 V
Input voltage DC	176...276 V
Total harmonic distortion	< 5 %
Power factor $\lambda$	> 0.98
Efficiency in full-load	93%
Device power loss	6.0 W
Inrush current	46 A
Max. ECG no. on circuit breaker 10 A (B)	9
Max. ECG no. on circuit breaker 16 A (B)	15
Surge capability (L/N-Ground)	2 kV
Surge capability (L-N)	1 kV
Nominal output voltage	48.2 V
U-OUT (working voltage)	48.2 V
Output PSTLM	<1
Output SVM	<0.4
Nominal output power	0...80 W
Maximum output power	80 W
Galvanic isolation	SELV
Galvanic isolation DALI/mains	Basic
Galvanic isolation DALI/output	Double
Networked standby power	<0.30 W

## Dimensions & weight

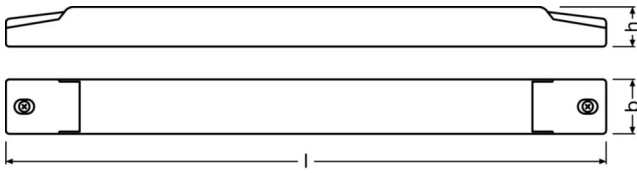

<b>Length</b>	346.0 mm
<b>Width</b>	32.0 mm
<b>Height</b>	22.0 mm
<b>Mounting hole spacing, length</b>	303.0 mm
<b>Cable cross-section, input side</b>	0.5...2.5 mm <sup>2</sup>
<b>Cable cross-section, output side</b>	0.5...1.5 mm <sup>2</sup>
<b>Wire preparation length, input side</b>	6.0 mm
<b>Wire preparation length, output side</b>	5.0 mm
<b>Product weight</b>	191.00 g

## Colors & materials

<b>Casing material</b>	Plastic
<b>Product color</b>	White

## Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+45 °C
<b>Maximum temperature at tc test point</b>	85 °C
<b>Max.housing temperature in case of fault</b>	115 °C
<b>Temperature range at storage</b>	-40...85 °C
<b>Permitted rel. humidity during operation</b>	5...85 %

## Lifespan

ECG lifetime	50000 h
--------------	---------

## Additional product data

Encapsulated	No
--------------	----

## Capabilities

Programming interface	DALI - 2
Dimmable	Yes
Dimming interface	DALI-2
Dimming range	0.1...100 %
Dimming method	Pulse Width Modulation
DALI-2 Diagnostic Data	Yes
DALI-2 Energy Data	Yes
Max. cable length to lamp/LED module	50 m
Suitable for fixtures with prot. class	I / II
Suitable for emergency lighting	Yes
EL DC detection selectable	Yes
EL EOFi – default value	0.15
Type of connection, input side	Screw terminal
Type of connection, output side	Screw terminal
Suitable for through-wiring	No
Number of channels	1
Overheating protection	Yes
Overload protection	Yes
Short-circuit protection	Yes
Intended for no-load operation	No
No-load proof	Yes

## Programming

Tuner4TRONIC	Yes
--------------	-----

## Programmable features

DALI Settings	Yes
DALI-2 Luminaire Data	Yes
TouchDIM + Sensor	Yes
Corridor Functionality	Yes

## Certificates & standards

Approval marks – approval	CCC / CE / BIS / ENEC / EL / MM / RCM / VDE-ENEC
Type of protection	IP20

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	12-03-2025
Primary Article Identifier	6977770432475
Declaration No. in SCIP database	In work
SCIP_ID	

## Equipment / Accessories

- Suitable for 48 V LED modules

## Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Download Data

File		
Certificates	PDF	▶ OT VDE ENEC 40050684 290125
Mandatory Publications	PDF	▶ OTI DALI 48V CE 4540294 040225
User instruction	PDF	▶ G15130368 UI_OTi DALI 50_80 48 1CH_4p_MiCh_INV v2



## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
6977770432475	OTi DALI 80/220-240/48 1CH	Shipping carton box 20 Pieces	370 x 170 x 113 mm	7.11 dm <sup>3</sup>	199.90 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit