

## BA-LIN-Z3 1100-865 280X20

BASIC Linear G3 | Linear Light Engines



### Product family features

- Module efficacy: up to 168 lm/W
- Available with luminous flux: 770 lm, 1,100 lm on 280 mm
- Available with luminous flux: 1,550 lm, 2,200 lm on 560 mm
- Available with luminous flux: 3,100 lm, 4,400 lm on 1,120 mm
- Average lifetime (L80 B50): > 50,000 h (temperature at  $T_c = 50\text{ }^\circ\text{C}$ )
- Color rendering index: > 80
- CE marked, ENEC certified

### Product family benefits

- Slim luminaire design by small and flexible form factor
- Adjustable luminous flux, efficacy and lifetime
- Powerful system with cost efficient OPTOTRONIC/ELEMENT driver family



## Areas of application

- Office
- Industry

## Technical data

### Electrical data

Nominal voltage	24.50 V
Nominal current	0.25 A
Type of current	DC
On-mode power	6.2 W
Energy consumption in on-mode	6.2 kWh/1000h
Max. drive current	600 mA

### Photometrical data

Luminous efficacy	179 lm/W
Color Rendering Index	82
Color rendering index Ra	80
Correlated color temperature CCT	6500 K
Colour consistency (McAdam ellipses)	3
Useful luminous flux ( $\Phi_{use}$ )	1110 lm


### Light technical data

Starting time	0 s
Warm-up time (60 %)	0 s

### LED module information

Number of LEDs per module	36
---------------------------	----

## Dimensions & weight

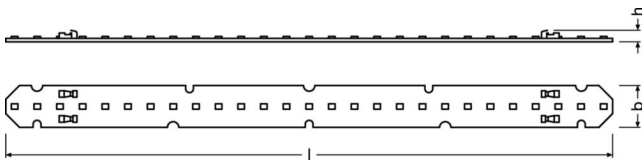

<b>Product weight</b>	12.40 g
<b>Height EPREL</b>	5 mm
<b>Length EPREL</b>	280 mm
<b>Width EPREL</b>	20 mm

## Temperatures & operating conditions

<b>Performance temp. acc. to IEC 62717</b>	50 °C
<b>Maximum temperature at tc test point</b>	75 °C
<b>Temperature range at storage</b>	-30...85 °C
<b>Ambient temperature range</b>	-20...+75 °C

## Lifespan

Number of switching cycles	100000
Lumen maintenance factor LMF	96
L70B50 lifetime	50000 h

## Additional product data

Lighting technology used	LED
--------------------------	-----

## Certificates & standards

<b>Standards</b>	CE / ENEC / VDE
<b>Type of protection</b>	IP20
<b>Energy efficiency class</b>	C

## Logistical data

<b>Commodity code</b>	85414100000
-----------------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
<b>Date of Declaration</b>	01-04-2026
<b>Primary Article Identifier</b>	4052899607606   6937186106148
<b>Declaration No. in SCIP database</b>	In work
<b>SCIP_STATUS</b>	In work
<b>SCIP_ID</b>	

## Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
6937186106148 INVENTRONICS	BA-LIN-Z3 1100-865 280X20	Shipping carton box 60 Pieces	592 x 250 x 100 mm	14.80 dm <sup>3</sup>	19.60 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.