

## ELEMENT 15/220-240/350 G3 (PHASE OUT)

ELEMENT G3 | Compact constant current LED driver – Non dimmable



### Product family features

- Fixed output (no dimming)
- Input voltage: 220 – 240 VAC
- Suitable for Class I/II luminaires
- Output current range 150-1050 mA
- Up to 30 000 h lifetime at  $t_{cmax} = 80\text{ °C}$
- Typ. Efficiency: from 82% to 90% depend on different wattage
- SELV
- Ambient temp range,  $t_a$ :  $-20\text{ °C}$  to  $+50\text{ °C}$

### Product family benefits

- Safety ensured by OSRAM (SELV)
- 3 years guarantee
- High quality of light with ripple current  $< 5\%$

## Areas of application

- Spot light and down light
- Panels
- Other Indoor LED luminaries

## Technical data

### Electrical data

Nominal input voltage	220...240 V
Nominal output current	350 mA
Nominal output power	8.4...14.7 W <sup>1)</sup>
Nominal output voltage	24...42 V
Maximum output power	14.7 W
Mains frequency	50/60 Hz
Input voltage AC	198...264 V
Device power loss	2.4 W <sup>2)</sup>
Efficiency in full-load	86 % <sup>3)</sup>
Galvanic isolation primary/secondary	SELV
Inrush current	< 7.2 A <sup>4)</sup>
Max. ECG no. on circuit breaker 10 A (B)	53
Max. ECG no. on circuit breaker 16 A (B)	85
Max. ECG no. on circuit breaker 25 A (B)	132
Output current tolerance	±7.5 %
Output PSTLM	≤1
Output ripple current (100 Hz)	< 5 %
Output SVM	≤0.4
Power factor λ	0.95...0.97
Protective conductor current	<0.7 mA
Surge capability (L-N)	1 kV
Surge capability (L/N-Ground)	2 kV
Total harmonic distortion	< 10 %
U-OUT (working voltage)	60 V
Current set	Fixed current


1) Partial load

2) At 230 V, Input power 17.1 W max.

3) at 230 V, 50 Hz

4)  $t_{width} = 100 \mu s$  (measured at 50 %  $I_{peak}$ )

## Dimensions & weight

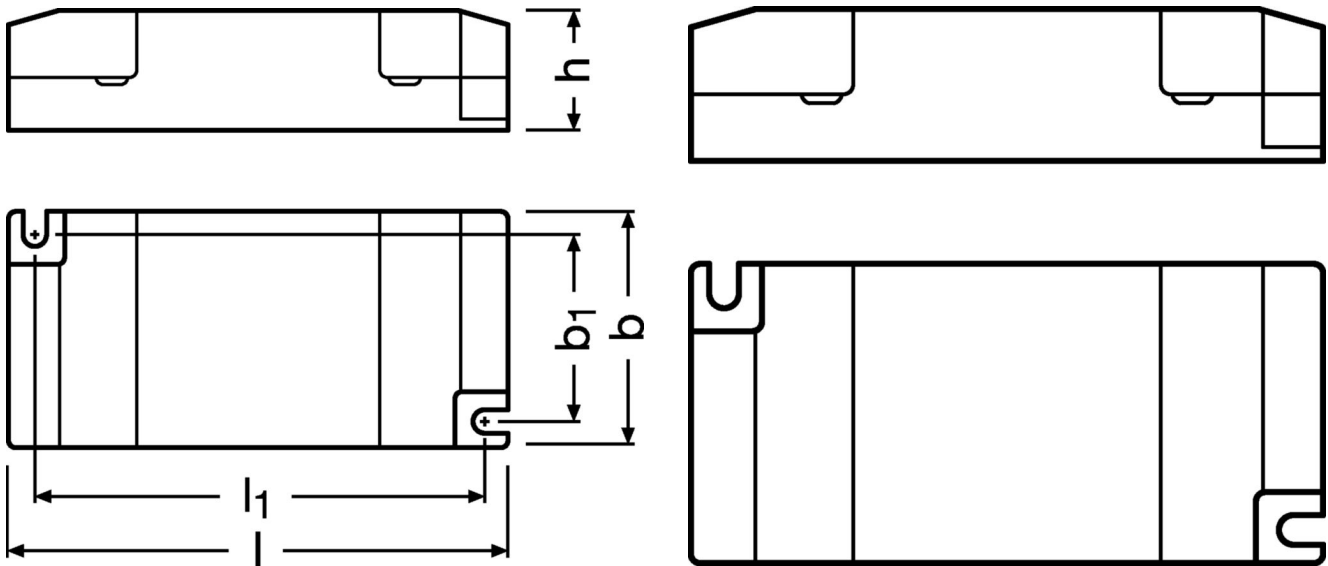

Length	90.0 mm
Height	22.0 mm
Width	43.0 mm
Product weight	52.00 g
Cable cross-section, input side	0.5...1.5 mm <sup>2</sup> / 0.75...1.5 mm <sup>2</sup> <sup>1)</sup>
Cable cross-section, output side	0.5...1.5 mm <sup>2</sup> / 0.75...1.5 mm <sup>2</sup> <sup>1)</sup>
Wire preparation length, input side	7...8 mm
Wire preparation length, output side	7...8 mm
Mounting hole spacing, length	80.0 mm
Mounting hole spacing, width	34.0 mm

1) Solid/ Flexible Leads

## Colors & materials

Casing material	Plastic housing
-----------------	-----------------

## Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Max.housing temperature in case of fault	110 °C
Maximum temperature at tc test point	80 °C
Permitted rel. humidity during operation	5...85 % <sup>1)</sup>
Temperature range at storage	-40...+85 °C

1) Non-condensing

## Lifespan

<b>ECG lifetime</b>	30000 h / 50000 h <sup>1)</sup>
---------------------	---------------------------------

1) At maximum  $T_c = 80^\circ\text{C}$  / 10% failure rate / At maximum  $T_c = 70^\circ\text{C}$  / 10% failure rate

## Additional product data

<b>Encapsulated</b>	No
<b>Predecessor EAN</b>	4052899552906

## Capabilities

<b>Dimmable</b>	No
<b>Max. cable length to lamp/LED module</b>	2.0 m <sup>1)</sup>
<b>Overload protection</b>	Automatic reversible
<b>Overheating protection</b>	No
<b>Suitable for fixtures with prot. class</b>	I / II
<b>Suitable for through-wiring</b>	No
<b>Type of connection, input side</b>	Push terminal
<b>Type of connection, output side</b>	Push terminal
<b>Intended for no-load operation</b>	No
<b>No-load proof</b>	Automatic reversible
<b>Number of channels</b>	1
<b>Short-circuit protection</b>	Automatic reversible

1) Output wires must be routed as close as possible to each other

## Programming

Programming device	not relevant
Tuner4TRONIC	No
Tuner4TRONIC Field App	No

## Certificates & standards

Type of protection	IP20
Approval marks – approval	CE / CCC / RCM / ENEC 25 <sup>1)</sup>
Standards	Acc. to IEC 61347-1 / Acc. to IEC 61347-2-13 / Acc. to IEC 62384 / Acc. to IEC 61000-3-2 / Acc. to IEC 61547 / Acc. to IEC 61000-3-3

1) In preparation

## Logistical data

Commodity code	85044083900
----------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Declaration No. in SCIP database	In work
Date of Declaration	29-07-2024
Primary Article Identifier	4062172167475
SCIP_STATUS	In work
SCIP_ID	

## Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Download Data

File		
Certificates	PDF	▶ ELEMENT G3 ENEC 64142205009306 U6 070723
CAD data	Compressed	▶ ELEMENT 6 15 G3 STEP 250321
Mandatory Publications	PDF	▶ ELEMENT G3 CE 4232185 07 080823
Mandatory Publications	PDF	▶ ELEMENT G3 UK DoC 4281070 03 240823
User instruction	PDF	▶ UI Element G3



## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172167475	ELEMENT 15/220-240/350 G3	Shipping carton box 20 Pieces	311 x 195 x 92 mm	5.58 dm <sup>3</sup>	62.15 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.